

Color Variants

VI422105

Optional accessories

CA050300

CA052300

CA055300

Required installation accessories

CKI420000

CKI420010

Installation Accessories

VA420004

Flex function for combining the rectangular cooking areas  
Flexible positioning of cookware inside combined cooking areas  
Solid stainless steel knob, also selectable with black robust finishing, for precise control and personalisation  
Frameless for flush installation  
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones

2 flex induction cooking areas 24x20 cm (2200 W, with booster 3700 W), linked together 24x40 cm (3300 W, with booster 3700 W).

Handling

Control knobs with illuminated ring, cooking zone and output level markings.  
Electronic power control in 12 stage (1...12).  
User friendly control with two color display (white / orange).

Features

Flex function for rectangular cooking areas.  
Frying sensor function.  
Booster function.  
Stopwatch.  
Short-term timer.  
Options menu.  
Power management.

Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
Remote monitoring.  
Remote diagnostics.  
Integrated WiFi module for digital services (Home Connect).  
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

Safety

Operation indicator.  
Pot detection.  
2 stage Hh residual heat indicator for each zone  
Safety shut-off.

Planning notes

The horizontal positioning of the knobs may be aligned with the specific cooking areas.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

Characteristics

Product name/family

Vario/Domino cooking zone cera

Built-in / Free-standing

Built-in

Energy input

Electric

Total number of positions that can be used at the same time

2

Required niche size for installation (HxWxD)

57 x 360-389 x 492-527

Width of the appliance

384

Dimensions

57x384x521

Dimensions of the packed product (HxWxD)

120 x 580 x 610

Net weight

8.3

Gross weight

9.7

Residual heat indicator

Separate

Location of control panel

External

Basic surface material

Ceramic

Color of surface

Black

Color of frame

Length electrical supply cord

150.0

EAN code

4242006305819

Gas connection rating

Fuse protection

16

Voltage

220-240

Frequency

50-60

Included accessories

Consumption and connection features

created on 2025-08-23

Page 1

The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Special accessories (order as spare parts):

Part No. 17006018 Frying sensor pan, ø 20 cm  
Part No. 17006184 Frying sensor pan, ø 24 cm

Appliance can be snapped into the worktop from above.

Appliance weight: approx. 8.


Connection

Total connected load 3.7 KW.

Connecting cable 1.50 m without plug.  
Power consumption standby/display off 0.5 W.


Power consumption standby/network 1.4 W.

Please check the user manual for how to switch off the WiFi module.

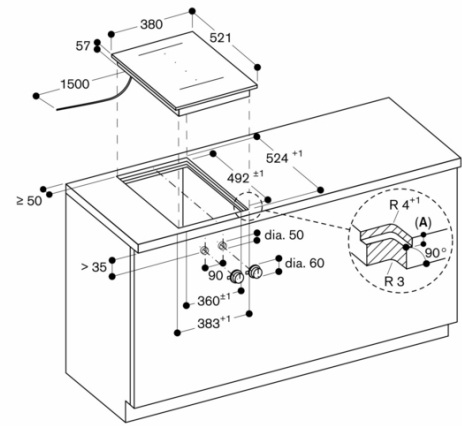


A: 6.5<sup>+0.5</sup>  
measurements in mm

Longitudinal section

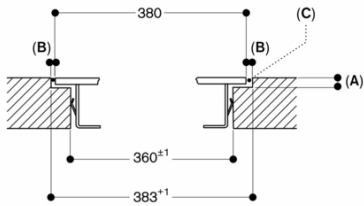


A: 6.5<sup>+0.5</sup>  
B: 1.5  
C: Fill with silicone  
measurements in mm

View from above

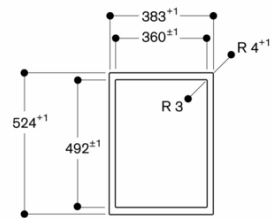


measurements in mm

Installation of the control knob; flush installation

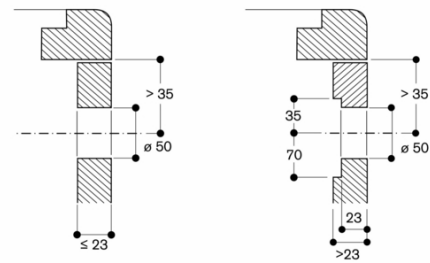

measurements in mm

Cross-section

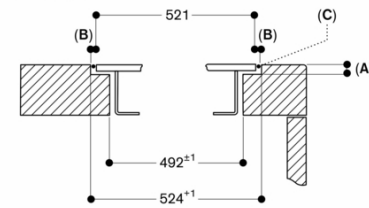

A: 6.5<sup>+0.5</sup>  
B: 1.5  
C: Fill with silicone  
measurements in mm