



WSP221132

Optional accessories

installation accessories

warming drawer 200 series  
60 x 14 cm, Gaggenau Silver  
**WSP221132**

- Hygienic stainless steel interior with glass bottom
  - Power level from 30° to 80°
  - Flush installation
- Handleless drawer  
Push-to-open function.  
Hygienic stainless steel interior with glass bottom  
Direct temperature selection in the range 30 °C to 80 °C.  
For slow cooking, dough proofing, herbs and fruits drying, chocolate melting and defrosting

**Heating methods**

Slow cooking.  
Keeping meals warm.  
Warming ovenware.  
Cups and plates warming.  
Direct temperature control.  
Personalisation function via Home Connect.  
16 additional programmes via Home Connect.

**Handling**

Touch key operation.

**Features**

Net volume 20 litres.  
Volume capacity: Dinner service for 6 people including ø 27 cm plates and soup bowls, additional bowls and a serving dish depending on size.  
Capacity load max. 25 kg.  
Usable interior dimensions  
W547 mm x H 91 mm x D 410 mm.  
Heating system for even heat distribution and stable cavity temperature.  
Status display, visible in the glass front.  
Glass bottom made of safety glass.

**Selected digital services (Gaggenau Home Connect)**


Additional programmes and recipes.  
Remote control and monitoring.  
Timing function.  
Integrated WiFi module for digital services (Home Connect).  
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: [www.home-connect.com](http://www.home-connect.com)

**Planning notes**

Necessary lateral gap between appliance front and furniture panel of min. 5 mm.  
The door panel surface of the appliance extends 21 mm from the furniture cavity.  
Installation of BSP/BMP/CMP directly above WSP in 59 cm niche without intermediate floor.  
The socket can be planned behind the appliance.

**Connection**

Total connected load 0.81 KW.  
Connection cable 1.75 m, pluggable.

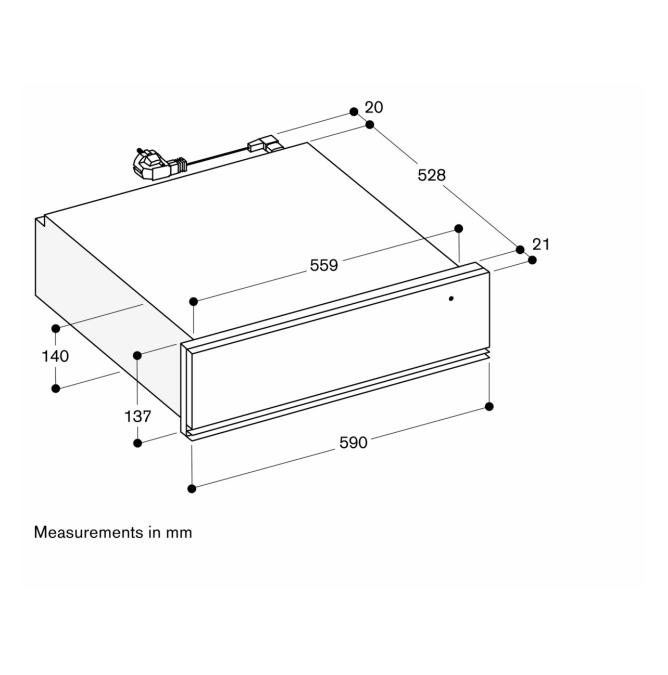

WSP 221 below BSP, BMP, CMP

