


## iQ700, Built-in compact oven with steam function, Stainless steel CS658GRS6B

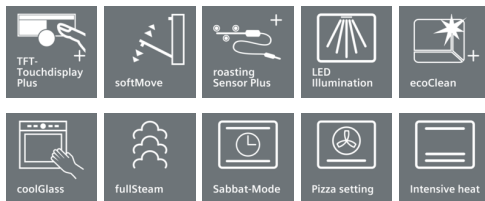

The compact oven with fullSteam function and sensors for optimum results.

- ✓ pulseSteam: for crispy crusts and juicy roasts.
- ✓ TFT Touchdisplay Plus: clear text display and intuitive operation.
- ✓ Connect: Access and control your oven, no matter where you are - with the easy-to-use Home Connect App
- ✓ roastingSensor Plus and bakingSensor: detect the exact moment when your food is done.
- ✓ ecoClean Plus: effortless cleaning thanks to a special coating.
- ✓ Energy efficiency class A+: For more efficient roasting and baking.

### Features

#### Technical Data

Color / Material Front : Stainless steel

Built-in / Free-standing : Built-in

Door opening : Drop down

Required niche size for installation (HxWxD) : 450-455 x 560-568 x 550

Dimensions of the product (mm) : 455 x 594 x 548

Dimensions of the packed product (HxWxD) (mm) : 530 x 660 x 690

Control Panel Material : Stainless steel

Door Material : Glass

Net weight (kg) : 36.027

Approval certificates : CE, VDE

Length electrical supply cord (cm) : 150

EAN code : 4242003801833

Current (A) : 16

Voltage (V) : 220-240

Frequency (Hz) : 50; 60

Plug type : no plug

Approval certificates : CE, VDE

Number of cavities (2010/30/EC) : 1

Usable volume (of cavity) - NEW (2010/30/EC) : 47

Energy efficiency class (2010/30/EC) : A+

Energy consumption per cycle conventional (2010/30/EC) : 0.73

Energy consumption per cycle forced air convection (2010/30/EC) : 0.61

Energy efficiency index (2010/30/EC) : 81.3

### Included accessories

1 x grid, 1 x universal pan, 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S

### Optional accessories

HZ915003	Glass roasting dish, 5,4 L
HZ6HCC0	Cookbook
HZ66X600	Decor list
HZ664000	Baking and roasting grid (steam)
HZ636000	Glass pan
HZ631070	Baking tray, anthracite enamelled
HZ631010	Baking tray, non-stick coated
HZ625071	Grill tray, anthracite enamelled



4 242003 801833

## iQ700, Built-in compact oven with steam function, Stainless steel CS658GRS6B

### Features

#### Design

- 5.7" TFT touchDisplay Plus
- Full colour display
- Stainless steel control dial
- Drop down oven door, softClose, softOpen
- Bar handle
- Cavity inner surface: Enamel anthracite
- Smooth enamelled oven interior

#### Features

- Automatic temperature proposal
- Actual temperature display
- Heating-up indicator
- Sabbath setting
- Control panel lock
- Automatic safety switch off
- Residual heat indicator
- Start button
- Door contact switch
- WLAN - Home connect enabled
- cookControl Plus
- roastingSensor Plus
- bakingSensor
- Electronic oven clock timer
- Main on/off switch
- LED light
- Light on/off when door opened/closed
- 3 shelf positions
- Tank empty indicator
- Integral cooling fan

#### Cleaning

- ecoClean® programme
- Full glass inner door

#### Programmes/functions

- Compact steam oven with 15 heating methods: 4D hot air, hotairGentle, conventional, Conventional heat Gentle, hot air grilling, full width grill, half width grill, Pizza Setting, coolStart, bottom heat, intensive conventional heat, low temperature cooking, keep warm, dehydrate, plate warming
- Additional heating methods with steam: steam, reheating, Dough proving, defrost
- Additional functions:
  - Descaling programme
  - Drying function
  - autom. boiling point detection
  - Fast pre-heat

#### Standard accessories

- 1 level telescopic shelf, full extension, Stop function
- 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S, 1 x grid, 1 x universal pan

#### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A+
- Energy consumption per cycle in conventional mode: 81.3

- Energy consumption per cycle in fan-forced convection mode: 0.61 kwh
- Number of cavities: 1
- Cavity volume: 47 litre capacity
- 1 l Water tank capacity:
- Temperature range 30 °C - 250 °C
- Length of mains cable: 150 cm
- Total connected load electric: 3.3 KW
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwxh): 455 mm x 594 mm x 548 mm
- Niche dimension (hxwxh): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual