




BOSCH

Series 2, Integrated cooker hood, 60 cm, Silver DEM63AC00B

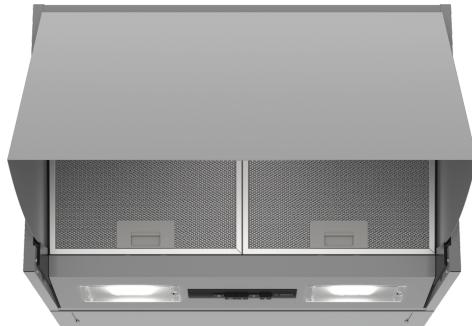

Optional accessories

DWZ0IM0AO Standard odor filter (replacement)

D

Integrated cooker hoods pull out when in use and close neatly to conceal when not in operation.

- **Silent:** maximum extractor performance with little noise.
- **3-speed power Level options to suit your cooking style and recipes.**
- **Ducted or Non-ducted Options**

Technical Data

Typology:	Built-in/Built-under
Length electrical supply cord:	150.0 cm
Minimum distance above an electric hob:	500 mm
Minimum distance above a gas hob:	650 mm
Net weight:	10.4 kg
Type of control:	mechanical
Number of speed settings:	3
Max. air extraction:	368 m³/h
Max. air recirculation:	272 m³/h
Maximum Air flow:	368 m³/h
Number of lights:	2
Noise level:	62 dB(A) re 1 pW
Diameter of air outlet:	150 / 120 mm
Grease filter material:	Washable aluminium
EAN code:	4242005041107
Connection rating:	126 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



4 242005 041107

Series 2, Integrated cooker hood, 60 cm, Silver DEM63AC00B

Integrated cooker hoods pull out when in use and close neatly to conceal when not in operation.

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 368 m³/h
- Noise max. Normal Level: 62 dB*

Features

- Push button control for extractor speeds and light
- 3 power levels
- Single motor
- 2 x 3W LED
- Colour Temperature: 2700 K
- 2 metal grease filter cassettes
- For installation between cupboards

Design

- Integrated hood
- Push button control
- Mechanical

Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 62 dB(A) re 1 pW
- Light Intensity: 188 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 402-402 x 599 x 271 mm
- Dimensions recirculating (HxWxD): 402-402 x 599 x 271 mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 65.7 kWh/year*

Optional accessories


- Recirculating kit DWZ01M0AO

* In accordance with the EU-Regulation No 65/2014

**Series 2, Integrated cooker hood, 60
cm, Silver
DEM63AC00B**

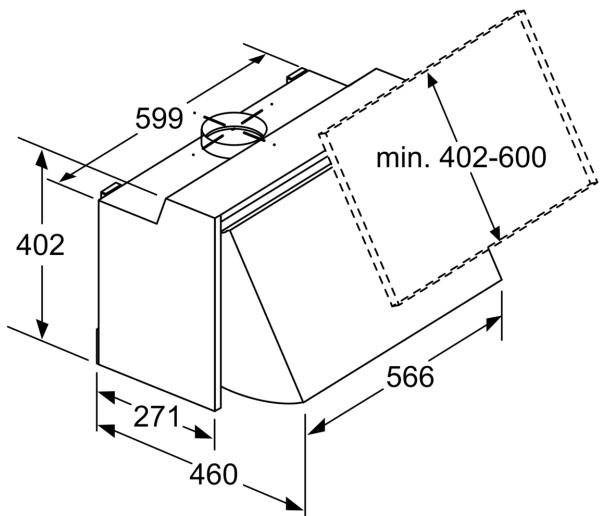

measurements in mm

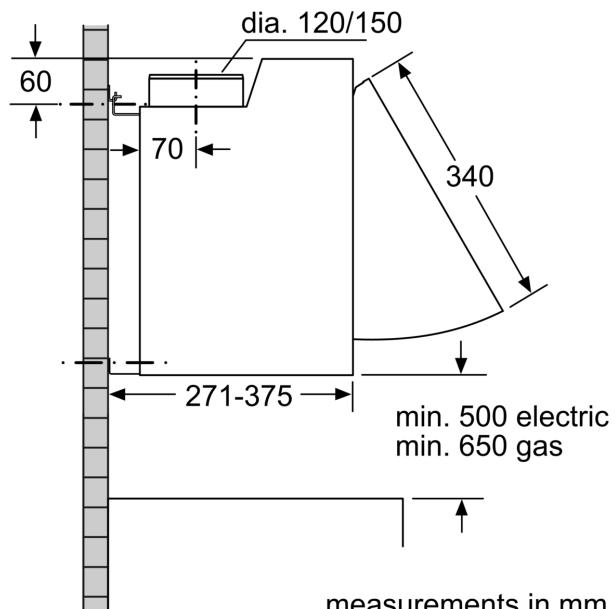

measurements in mm