

Serie | 6

Exxcel
Chimney extractor hood with
glass canopy
DWA067E51B Brushed steel

A+



Optional accessories

- DHZ1225 : Chimney extension 1000 mm
- DHZ1235 : Chimney extension 1500 mm
- DHZ5326 : Active carbon filter
- DSZ5201 : CleanAir active carbon filter spare part
- DSZ6200 : CleanAir Recirculation Kit
- DZZ0XX0P0 : CleanAir act.carbon filter regenerative

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- An impressive extraction rate of 680 m³/h ensures this hood will have your kitchen odour free in no time.
- LED lighting is highly energy efficient and provides attractive, white and even lighting for the hob area.
- Intensive speed setting with revert gives a quick intensive 6 min. burst to clear strong odours and then reverts back to the normal setting.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	581-897/581-1007
Height of product, without chimney (mm) :	57
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	16.531
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m ³ /h) :	440
Boost position output recirculating (m ³ /h) :	360
Maximum output recirculating air (m ³ /h) :	300
Boost position air extraction (m ³ /h) :	680
Number of lights :	2
Noise level (dB(A) re 1 pW) :	60
Diameter of air outlet (mm) :	150 / 120
Grease filter material :	Washable aluminium
EAN code :	4242002776170
Connection Rating (W) :	136
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation typology :	Wall-mounted



Serie | 6 Hoods

Exxcel

Chimney extractor hood with glass canopy DWA067E51B Brushed steel

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

Key features

- Electronic control
- Electronic power level display
- Grease and charcoal filter saturation indicators

Design

- 60 cm wide
- Designed for wall mounted installation
- Height adjustable chimney sections
- Brushed steel with glass canopy

Features

- Soft touch button control for extractor speeds and light
- 3 power levels and 2 intensive settings
- Automatic intensive revert
- LED lights
- Softlight dimmer function
- Florescent mood lighting
- Removable metal grease filters
- 1 metal grease filter cassette


Performance/technical information

- Suitable for ducted or recirculating operation
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 440 m³/h
 - Intensive 680 m³/h
- Maximum extraction rate 680 m³/h (intensive)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 60 dB (A) re 1pW (46 dB (A) re 20 µPa sound pressure)





Serie | 6 Hoods

Exxcel

Chimney extractor hood with glass canopy DWA067E51B Brushed steel

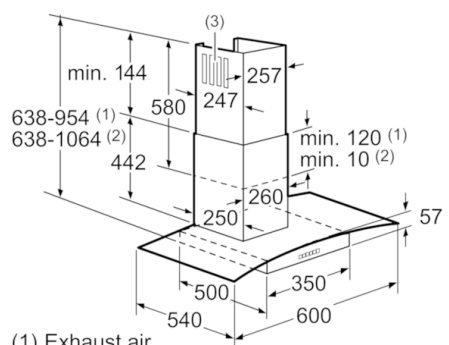

- (1) Exhaust air
(2) Circulated air
(3) Air outlet - Fit the exhaust air slot facing downwards
- Measurements in mm

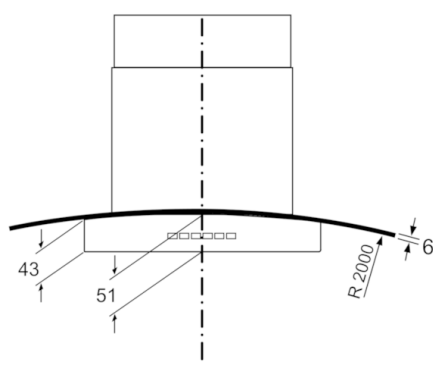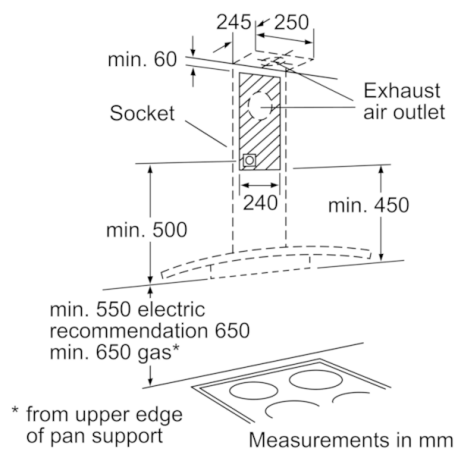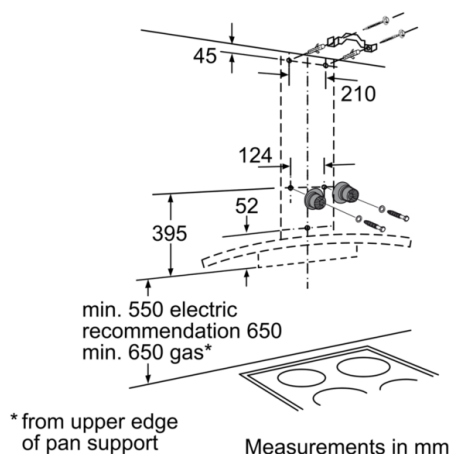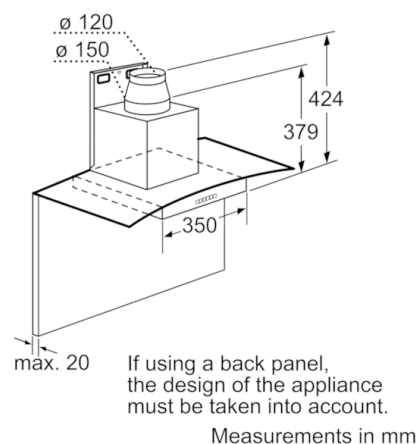

Measurements in mm