

**BOSCH**

**Series 6, Wall-mounted cooker hood,
60 cm, Stainless steel
DWB68JQ50B**



Optional accessories

DHZ1225	Chimney extension 1000 mm
DHZ1235	Chimney extension 1500 mm
DHZ5325	Standard recirculation kit
DHZ5326	Standard odor filter (replacement)
DWZ0XX0J5	Long Life recirculation kit
DWZ1CB114	Clean Air Standard recirculation kit
DWZ1CX116	Clean Air Plus recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DWZ1FX5D1	Long Life recirculation kit external
DZZ0XX0PO	Long Life odor filter (replacement)
DZZ1CX1B4	Clean Air Standard odor filter (repl.)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)

A

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- **PerfectAir sensor:** automatic extractor control for high performance with low noise.
- **Especially silent:** maximum hood performance, minimum noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **EcoSilence Drive™:** the powerful, energy-saving drive for hoods.

Technical Data

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	582-908/568-1018 mm
Height of the appliance:	46 mm
Minimum distance above an electric hob:	550 mm
Minimum distance above a gas hob:	650 mm
Net weight:	16.8 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Max. air extraction:	409 m³/h
Boost position output recirculating:	428 m³/h
Max. air recirculation:	334 m³/h
Boost position air extraction:	733 m³/h
Maximum Air flow:	409 m³/h
Number of lights:	2
Noise level:	60 dB(A) re 1 pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable stainless steel
EAN code:	4242005099320
Connection rating:	163 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted
Delay Shut off modes:	10 min





BOSCH

Series 6, Wall-mounted cooker hood, 60 cm, Stainless steel **DWB68JQ50B**

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm:
 - max. Normal use 409 m³/h
 - Intensive 733 m³/h
- Noise max. Normal Level: 60 dB*

Special features

- PerfectAir sensor
- TouchControl with lightline
- 3 power levels and 2 intensive settings
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Dimmer function
- Efficient BLDC-technology
- Automatic after running (10 min)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame

Design

- Chimney extractor hood
- Designed for wall mounted installation
- Installation system: Chimney hood wall fixing syst.
- TouchControl
- Electronic control

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 409 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 60 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 60 dB(A) re 1 pW
- Intensive: 73 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 60 dB (A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use: 334 m³/h
- Intensive: 428 m³/h
- Noise level in recirculation mode: Max. normal use: 67 dB(A) re 1 pW
- Intensive: 73 dB(A) re 1 pW
- Light Intensity: 267 lux

- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 614-954 x 598 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 598 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD): 795-1139 x 598 x 500 mm
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 34.3 kWh/year*

Optional accessories

- Recirculating kit DHZ1225


* In accordance with the EU-Regulation No 65/2014




BOSCH

**Series 6, Wall-mounted cooker hood,
60 cm, Stainless steel
DWB68JQ50B**



measurements in mm

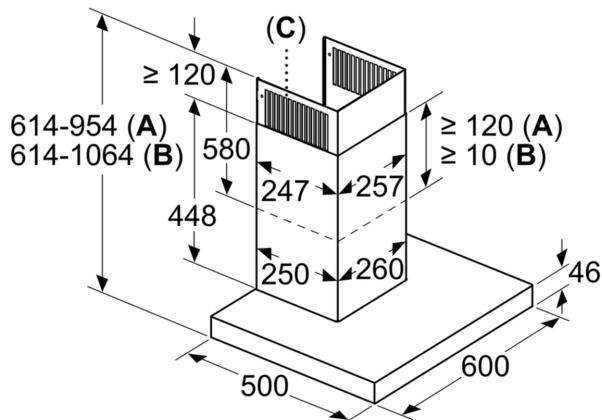

- A: Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air
to be mounted facing down

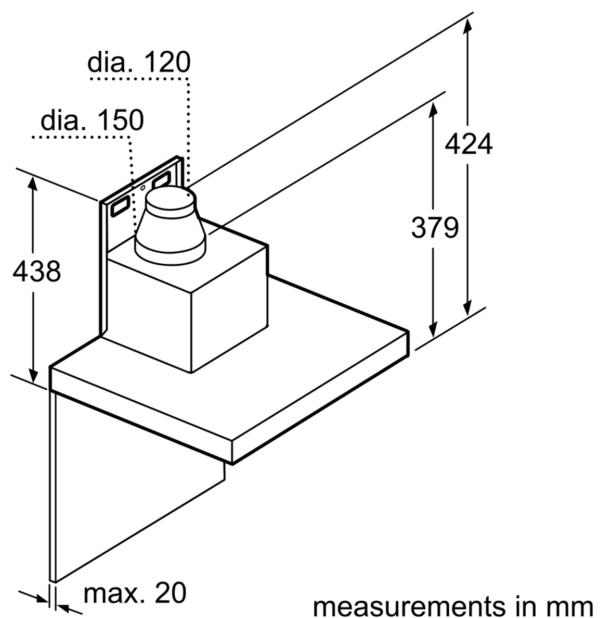

measurements in mm

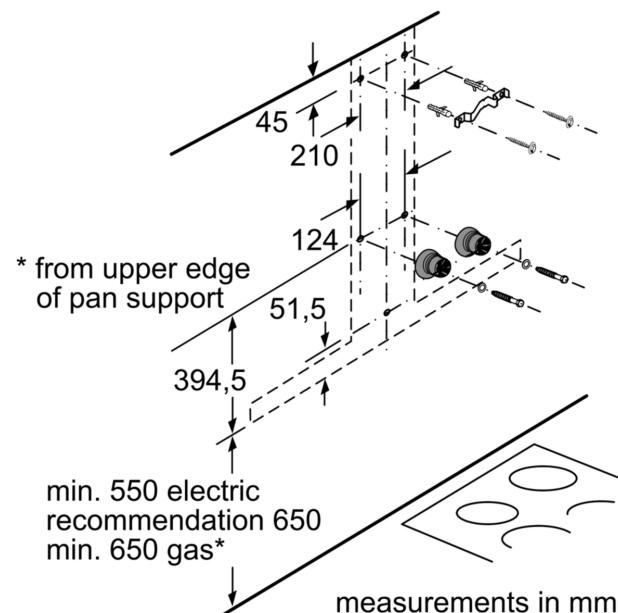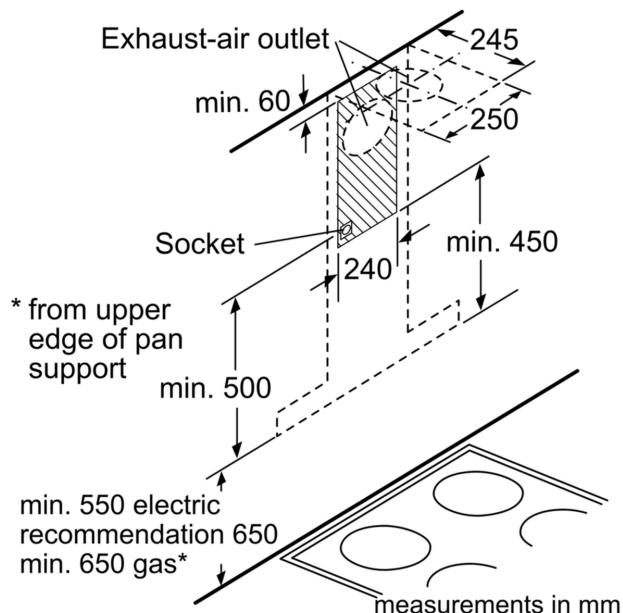

measurements in mm