


**IQ500, Induction hob, 60 cm,
Black,
ED651FSB5E**

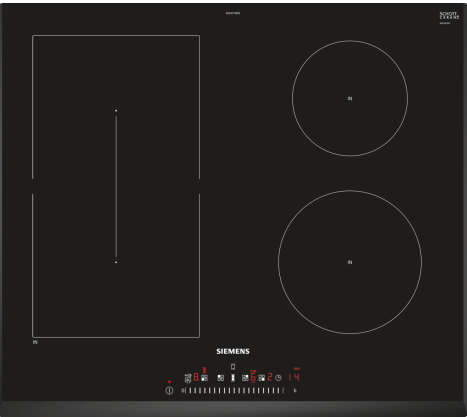

Optional accessories	
HZ32WA00	Wireless food thermometer
HZ390090	Wok Set consisting of 3 Items
HZ9ES100	Espresso maker 4 cups
HZ9FE280	Iron pan Ø 18 / 28 cm
HZ9SE030	Set of 2 pots and 1 pan
HZ9SE040	4 pieces Set
HZ9SE060	6 pieces Set

The modern CombiInduction cooktop - for more cooking possibilities

- ✓ **combiZone** – Connect two induction zones together for large cookware.
- ✓ The **touchSlider** allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.
- ✓ **Automatic simmer** function for convenient cooking thanks to preset power levels.
- ✓ **powerBoost** – Increases the power of an induction zone by up to 50%.
- ✓ Safely shuts off the cooking zone - **Timer with switch-off** function.

Features

Technical Data

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy input: Electric
Number of cooking zones: 4
Min. required niche size for installation (HxWxD):51 x 560-560 x 490-500 mm
Width of the appliance: 592 mm
Dimensions: 51 x 592 x 522 mm
Dimensions of the packed product (HxWxD): ... 126 x 753 x 608 mm
Weight: 10.9 kg
Gross weight: 13.2 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black
Length electrical supply cord: 110.0 cm
EAN code:4242003827987
Nominal power:220-240 V
Frequency:50; 60 Hz



IQ500, Induction hob, 60 cm, Black, ED651FSB5E

Features

Design

- 3 sided bevelled frameless finish
- 60 cm: space for 4 pots or pans.

Flexibility of cooking zones

- combiZone
- : use bigger cookware by connecting two classic cooking zones into one large zone.
- Cooking zone front left: 190 mm, 210 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 190 mm, 210 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 145 mm , 1.4 KW (max power 2.2 KW)
- Cooking zone front right: 180 mm, 1.8 KW (max. power 3.1 KW)

Usage convenience

- touchSlider control: directly control the power with the imprinted touch bar.
- 17 power levels: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Timer for all zones
- : switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Acoustic Signal
- : an alarm sounds at the end of the time set (e.g. for pasta).

Time saving & efficiency

- Power boost setting
- : boil water faster thanks to 50% more energy than at the highest standard level.
- 2-steps: increase or decrease the power level simply by moving the pot forwards or backwards.
- quickStart function: when switching on, the hob automatically selects the cooking zone with cookware (when placed on a zone whilst the hob is off).
- reStart function: in case of unintentional switch-off, this feature restores all previous settings by switching on the hob again within 4 seconds

Safety

- 2 stage residual heat indicators: indicates which cooking zones are still hot or warm.
- Control panel lock: prevent unintended activation of the hob.
- Control panel pause: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main on/off switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch off: for safety reasons, heating stops after a preset time if not used (possible to customise).
- Energy Consumption Display: shows the electricity consumption of the last cooking process.

Installation

- Dimensions of the product (HxWxD mm): 51 x 592 x 522

- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 6.9 KW
- Connection current management (20, 16, 13, 10 Amps options): limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 1.1 m, Cable included in packaging

IQ500, Induction hob, 60 cm,
Black,
ED651FSB5E

Dimensioned drawings

Built-in cooker/
built-in oven

min. 45

20

①

①
Ventilation gap must
be present

All measurements in mm

min. 550

Measurements
in mm

measurements in mm

522 592

51 (B)

≥ 16 (C)

≥ 40 (A)

560⁺²₋₀ (E)

490-500⁺²₋₀ (D)

65 (F)

A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

min. 65

min. 45

Drawer

20

①

①
Ventilation gap must
be present.

Measurements in mm

Dimensioned drawings

