


iQ700, Flex induction hob, 60 cm,
Black, surface mount with frame
EX675BEB1E

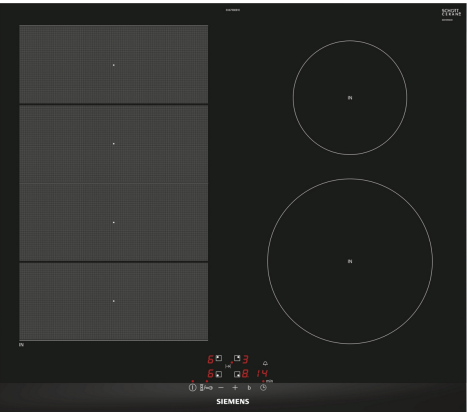

Optional accessories

HZ390522	Griddle Plate
HZ394301	Connecting strip
HZ390011	Stainless Steel roaster with glas lid
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390090	Wok Set consisting of 3 Items
HZ390210	System pan diameter 15 cm
HZ390220	System pan diameter 19 cm
HZ390230	System pan diameter 21cm
HZ390512	Teppan Yaki (large)

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ flexInduction adapts the cooking zones to different cookware and pots up to 24 cm diameter – for more flexibility.
- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.
- ✓ Safely shuts off the cooking zone - Timer with switch-off function.

Features

Technical Data

Product name/family:	Cooking zone ceramic
Built-in / Free-standing:	Built-in
Energy input:	Electric
Number of cooking zones:	4
Required niche size for installation (HxWxD):	51 x 560-560 x 490-500 mm
Width of the appliance:	602 mm
Dimensions:	51x602x520 mm
Dimensions of the packed product (HxWxD):	...	126 x 753 x 608 mm
Weight:	14.7 kg
Gross weight:	15.2 kg
Residual heat indicator:	Separate
Location of control panel:	Front
Basic surface material:	Ceramic
Color of surface:	Black, Alu, brushed
Length electrical supply cord:	110.0 cm
EAN code:	4242003830413
Nominal power:	220-240 V
Frequency:	50-60 Hz



iQ700, Flex induction hob, 60 cm,
Black, surface mount with frame
EX675BEB1E

Features	
<p>Control</p> <ul style="list-style-type: none">• TouchControl <p>Special features</p> <ul style="list-style-type: none">• flexInduction zone• <10711brandlookup> Can be used as 2 single induction zones of 380cm2 or 1 flexible induction zone of 960cm²• 4 induction cooking zones• reStart function• Timer for all zones• Acoustic Signal• 17 power levels• Power boost setting <p>Safety Features</p> <ul style="list-style-type: none">• Automatic pan recognition• Automatic safety switch off• Control panel lock• 2 stage residual heat indicators• Main on/off switch <p>Power and size</p> <ul style="list-style-type: none">• Cooking zones: 1 x Ø400 mmx240 mm,3.3 KW(max. Power levels3.7 KW) Induction or 2 x Ø 190 mm,2.2 KW(max. Powerlevels3.7 KW) Induction; 1 x Ø145 mm,1.4 KW(max. Power levels2.2 KW) Induction;1 x Ø210 mm,2.2 KW(max. Power levels3.7 KW) Induction <p>Technical information</p> <ul style="list-style-type: none">• Installation measurements:560 mmx490 mm• Min. worktop thickness:20 mm• Connected load:7.4 KW• Connection cable110 cm• Cable included in packaging	

iQ700, Flex induction hob, 60 cm,
Black, surface mount with frame
EX675BEB1E

Dimensioned drawings

Built-in cooker/
built-in oven

min. 45

20

①

①
Ventilation gap must
be present

All measurements in mm

min. 65

min. 45

20

①

①
Ventilation gap must
be present.

Measurements in mm

measurements in mm

520

602

51 (B)

560⁺²₀

490-500⁺²₀

A

B

C

D

E

F

A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50