


iQ700
EX677LYC1E Induction Hob
studioLine
602 mm

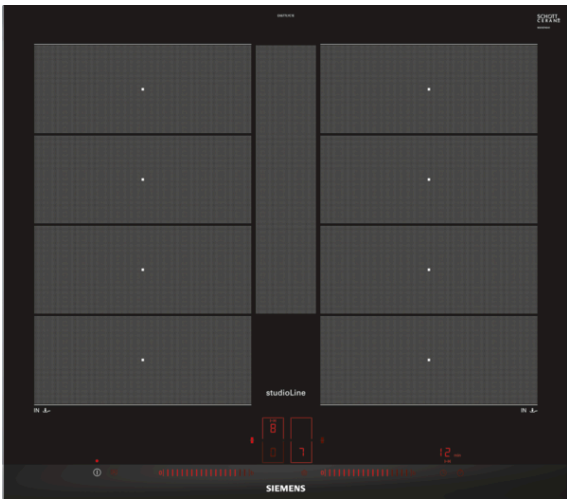

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.
- ✓ dual lightSlider lets you easily and intuitively operate the hob.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures, just by moving the pan
- ✓ flexInduction Plus adapts the cooking zones to different cookware and pots up to 30 cm diameter – for more flexibility.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Appliance Width (mm) : 602
 Dimensions of the product (mm) : 51 x 602 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 603
 Net weight (kg) : 14.896
 Gross weight (kg) : 16.0
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Alu, brushed, Black
 Color of frame : Alu, brushed
 Approval certificates : AENOR, CE
 Length electrical supply cord (cm) : 110
 EAN code : 4242003715284
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50

Optional accessories

HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390230	System pan diameter 21cm
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390011	Stainless Steel roaster with glas lid



iQ700
EX677LYC1E Induction Hob
studioLine
602 mm

Features

Control:

- Dual lightSlider
- fryingSensor plus with 5 temperature settings

Speacial features

- flexInduction Plus
- 2 extended flexInduction zones
- 4 induction cooking zones
- flexMotion
- powerMove plus
- reStart function
- Timer for all zones
- Acoustic Signal
- Count up timer
- Keep warm function
- 17 power levels
- Power boost setting
- panBoost
- Energy Consumption Display

Safety Features

- Automatic pan recognition
- Connection current management (20, 16, 13, 10 Amps options)
- Automatic safety switch off
- Control panel lock
- Control panel pause
- 2 stage residual heat indicators
- Main on/off switch

Power and size:

- Cooking zones: 1 x Ø 380 mmx225 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 380 mmx225 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 560 mmx490 mm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

iQ700
EX677LYC1E Induction Hob
studioLine
602 mm

Dimensioned drawings

