


iQ700, induction hob, 60 cm, Stainless steel EX679FEC1E

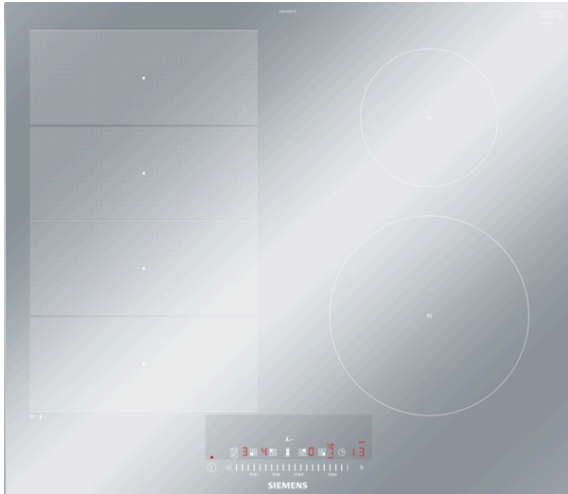

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ flexInduction – Smart cooking zone that adapts to your cookware.
- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.
- ✓ fryingSensor – Avoids scorching by keeping your pan temperature constant.
- ✓ powerBoost – Increases the power of an induction zone by up to 50%.
- ✓ Safely shuts off the cooking zone - Timer with switch-off function.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500 mm
 Width of the appliance : 602 mm
 Dimensions : 51 x 602 x 520 mm
 Dimensions of the packed product (HxWxD) : 126 x 753 x 603 mm
 Net weight : 13.411 kg
 Gross weight : 14.6 kg
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Color of surface : Stainless steel
 Approval certificates : AENOR, CE
 Length electrical supply cord : 110 cm
 EAN code : 4242003716892
 Electrical connection rating : 7400 W
 Voltage : 220-240 V
 Frequency : 50; 60 Hz

Optional accessories

HZ9SE030	Set of 2 pots and 1 pan
HZ394301	Connecting strip
HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390011	Stainless Steel roaster with glas lid



4 242003 716892

iQ700, induction hob, 60 cm, Stainless steel EX679FEC1E

Features

Control

- touchSlider control
- fryingSensor with 4 temperature settings

Design

- 602 mm
- Side profiles

Special features

- <10711brandlookup> Can be used as 2 single induction zones of 380cm² or 1 flexible induction zone of 960cm²
- flexInduction zone
- 4 induction cooking zones
- quickStart function
- reStart function
- Timer for all zones
- Acoustic Signal
-
- 17 power levels
- Power boost setting
- Energy Consumption Display

Safety Features

- Automatic pan recognition
- Automatic safety switch off
- Control panel lock
- Control panel pause
-
- 2 stage residual heat indicators
- Main on/off switch

Power and size

- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Connection cable 110 cm
- Cable included in packaging

**iQ700, induction hob, 60 cm, Stainless steel
EX679FEC1E**

Dimensioned drawings

