
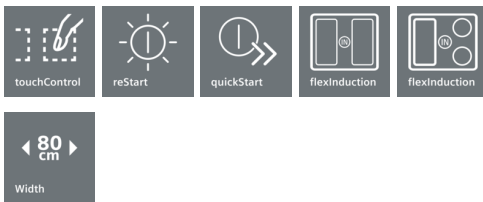


iQ700, induction hob, 80 cm, EX875BEB1E

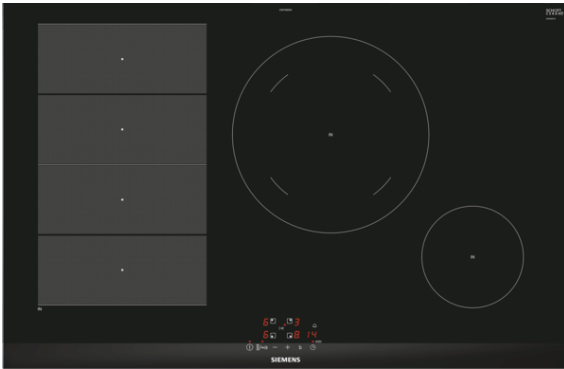

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ Flexible cooking thanks to the innovative flexInduction cooking zone and 2 traditional cooking zones.
- ✓ With touchControl individual the cooking zones can be activated and controlled with the light touch of a single finger.
- ✓ Innovative induction technology is one of the quickest, safest and most efficient methods of cooking.
- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.

Features

Technical Data

Product name/family : Cooking zone ceramic

Construction type : Built-in

Energy input : Electric

Total number of positions that can be used at the same time : 4

Required niche size for installation (HxWxD) : 51 x 750-780 x 490-500

Appliance Width (mm) : 812

Dimensions of the product (mm) : 51 x 812 x 520

Dimensions of the packed product (HxWxD) (mm) : 126 x 953 x 603

Net weight (kg) : 15.343

Gross weight (kg) : 16.8

Residual heat indicator : Separate

Location of control panel : Hob front

Basic surface material : Ceramic

Color of surface : Black

Approval certificates : AENOR, CE

Length electrical supply cord (cm) : 110

EAN code : 4242003830406

Electrical connection rating (W) : 7400

Voltage (V) : 220-240

Frequency (Hz) : 50; 60

Included accessories

1 x adjustment strip 750 - 780 mm

Optional accessories

HZ390522 Griddle Plate
 HZ390512 Teppan Yaki (large)
 HZ390012 Steaming Rack for Stainless Steel roast
 HZ390011 Stainless Steel roaster with glass lid



iQ700, induction hob, 80 cm, EX875BEB1E

Features

Control:

- TouchControl

Speacial features

- flexInduction zone
- <10711brandlookup> Can be used as 2 single induction zones of 380cm² or 1 flexible induction zone of 960cm²
- reStart function
- Timer for all zones
- Acoustic Signal
- 17 power levels
- Power boost setting
- no

Safety Features

- Automatic pan recognition
- Automatic safety switch off
- Control panel lock
- 2 stage residual heat indicators
- Main on/off switch
- Power and size:
- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 190 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 280 mm, 2.6 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction

Technical information

- Installation measurements: 750 mmx490 mm
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging