


iQ700, induction hob, 80 cm, EX877LYC1E

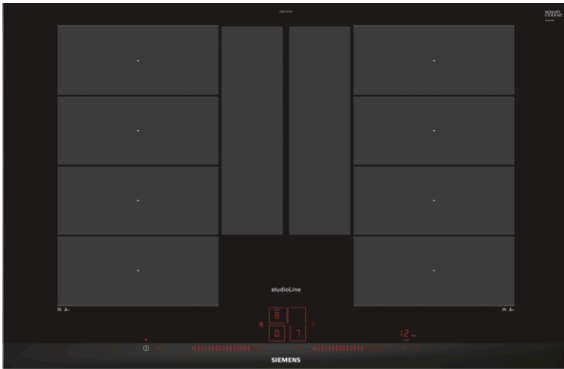

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.
- ✓ dual lightSlider lets you easily and intuitively operate the hob.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures, just by moving the pan
- ✓ flexInduction Plus adapts the cooking zones to different cookware and pots up to 30 cm diameter – for more flexibility.

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Energy input : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 750-780 x 490-500
 Appliance Width (mm) : 812
 Dimensions of the product (mm) : 51 x 812 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 953 x 603
 Net weight (kg) : 18.188
 Gross weight (kg) : 19.8
 Residual heat indicator : Separate
 Location of control panel : Hob front
 Basic surface material : Ceramic
 Color of surface : Black
 Approval certificates : AENOR, CE
 Length electrical supply cord (cm) : 110
 EAN code : 4242003717035
 Electrical connection rating (W) : 7400
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60

Optional accessories

HZ390522	Griddle Plate
HZ390512	Teppan Yaki (large)
HZ390230	System pan diameter 21cm
HZ390042	set of 3 pots and 1 pan
HZ390012	Steaming Rack for Stainless Steel roaste
HZ390011	Stainless Steel roaster with glass lid



iQ700, induction hob, 80 cm, EX877LYC1E

Features

Control:

- Dual lightSlider
- fryingSensor plus with 5 temperature settings

Special features

- flexInduction Plus
- 2 extended flexInduction zones
- 4 induction cooking zones
- flexMotion
- powerMove plus
- reStart function
- Timer for all zones
- Acoustic Signal
- Count up timer
- Keep warm function
- 17 power levels
- Power boost setting
- panBoost
- Energy Consumption Display

Safety Features

- Automatic pan recognition
- Automatic safety switch off
- Control panel lock
- Control panel pause
- 2 stage residual heat indicators
- Main on/off switch
- Power and size:
 - Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 750 mmx490 mm
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging