

**iQ300, free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
Inox-easyclean
KG36NVIEB**



Bottom freezer with hyperFresh Box to keep fruit and vegetables fresh for longer, plus with noFrost technology you never have to defrost again.

- ✓ noFrost – Never defrost your freezer again.
- ✓ Place your fridge directly against the wall – without a gap.
- ✓ bottleRack – Store your bottles safely and in easy reach.
- ✓ The easyAccess glass shelves make loading easier and give you a better view of your food items.
- ✓ The superCooling button reduces the temperature for a set time, to quickly cool down fresh food items.

Features

Technical Data

Energy Efficiency Class: E
 Average annual energy consumption in kilowatt hour per year (kWh/a):
 238 kWh/annum
 Sum of volume of frozen compartments: 89 l
 Sum of volume of chill compartments: 237 l
 Airborne acoustical noise emissions : 39 dB
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Free-standing
 Door panel options: Not possible
 Width of the appliance: 600 mm
 Depth: 660 mm
 Net weight: 71.373 kg
 Connection Rating: 100 W
 Fuse protection: 10 A
 Door hinge: Right reversible
 Voltage: 220-240 V
 Frequency: 50-60 Hz
 Approval certificates: CE, VDE
 Length electrical supply cord: 240 cm
 Storage Period in Event of Power Failure (h): 13 h
 Number of compressors: 1
 Number of independent cooling systems: 2
 Interior ventilator: No
 Reversible Door Hinge: Yes
 Number of Adjustable Shelves in fridge compartment: 2
 Shelves for Bottles: Yes
 Installation typology: N/A

Included accessories

3 x egg tray
 1 x ice cube tray



iQ300, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Inox-easyclean KG36NVIEB

Features

Functions

- Stainless Steel anti-fingerprint doors and Pearl grey (VZF 07127) side panels
- Integrated vertical handle Integrated vertical handle
- LED fridge light with Soft Start

Design features

- NoFrost, never have to defrost ever again
- Electronic control (2 LED chains)
- Twin evaporators allows independent temperature control and ensures there is no transference of humidity between the fridge and freezer cavity.
- Optical and acoustical door open warning system
- optical and acoustical Optical and acoustical
- superCool function with automatic deactivation
- Automatic defrost in fridge section

Design features

- without
- 4 removable safety glass shelves of which 2 are easy pull out
- Door shelves in fridge door: 1 large and 2 small

Freshness System

- 1 hyperFresh box with integrated humidity control
-

Food freshness system

- 3 freezer drawers

Dimension and installation

- Dimensions: 186 cm H x 60 cm W x 66 cm D

Key features - Fridge section

- Right hinged door, door reversible
- Height adjustable front feet
- Connection value 100 W
- 220 - 240 V

Key features - Freezer section

- 3 x egg tray, 2 x ice cube tray

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

Additional features

Design features

Dimension and installation

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 326 l
- Net Fridge Volume : 237 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h : 10 kg
- Annual Energy Consumption: 238 kWh/a

- Climate Class: SN-T

- EU19_Fast freezer facility_D: yes


- Noise Level : 39 dB

- Temperature rise time : EU19_Temperature rise time_D: 13 H



**iQ300, free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
Inox-easyclean
KG36NVIEB**

Dimensioned drawings

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700



measurements in mm

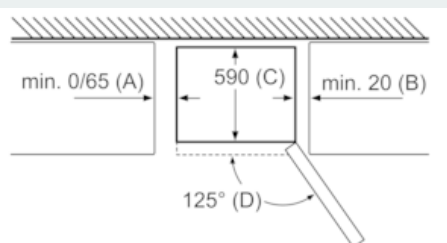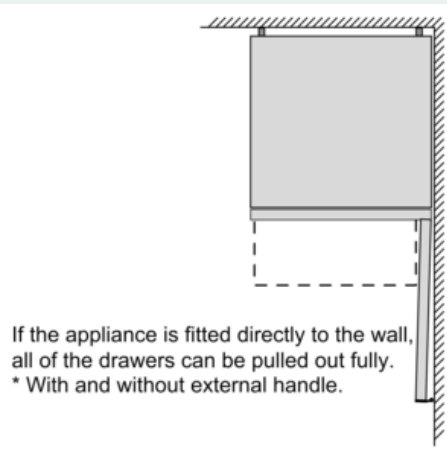

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm