

Series 4, 203 x 60 cm, Black matt KGN39IZEAG



Included accessories

3 x egg tray
1 x ice cube tray with lid

This bottom freezer with stylish matt blackboard finish doors incorporates the excellent vitaFresh food preservation drawers

- **NoFrost:** you'll never have to defrost your fridge-freezer again.
- Black matt chalkboard door
- **VitaFresh:** keeps food fresh for longer in climate controlled drawers at near 0°C.
- **PerfectFit:** place your fridge right next to walls and other appliances to save space.
- LED lighting - with soft start, lasts for the lifetime of the appliance.

Technical Data

Energy Efficiency Class: E

Average annual energy consumption in kilowatt hour per year (kWh/a): 238 kWh/annum

Sum of volume of frozen compartments: 89 l

Sum of volume of chill compartments: 279 l

Airborne acoustical noise emissions : 39 dB(A) re 1 pW

Airborne acoustical noise emission class: C

Built-in / Free-standing: Free-standing

Door panel options: Not possible

Height: 2030 mm

Width of the appliance: 600 mm

Depth: 660 mm

Net weight: 78.9 kg

Connection Rating: 100 W

Fuse protection: 10 A

Door hinge: Right reversible

Frequency: 50 Hz

Length electrical supply cord: 240 cm

Number of compressors: 1

Number of independent cooling systems: 2

Interior ventilator: No

Reversible Door Hinge: Yes

Number of Adjustable Shelves in fridge compartment: 3

Shelves for Bottles: Yes

Installation typology: N/A



4 242005 317066

Series 4, 203 x 60 cm, Black matt KGN39IZEAG

This bottom freezer with stylish matt blackboard finish doors incorporates the excellent vitaFresh food preservation drawers

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 368 l
- Net Fridge Volume : 279 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h : 10 kg
- Annual Energy Consumption: 238 kWh/a
- Climate Class: SN-T
- EU19_Fast freezer facility_D: yes
- Noise Level : 39 dB
- Temperature rise time : EU19_Temperature rise time_D: 12 H
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

Design features

- Integrated vertical handle Integrated vertical handle
- Bright interior LED fridge light
- No Frost, never have to defrost ever again

Food freshness system

- Separate, electronic temperature control with LED display
- Two separate cooling circuits allow independent temperature control and prevents the transference of humidity between the fridge and freezer cavity
- 1 VitaFresh drawer with humidity control - Fruits and vegetables retain vitamins and stay fresh for longer

Key features - Fridge section

- 5 safety glass shelves of which 3 are height adjustable
- Door shelves in fridge door: 1 large and 3 small
- ChillerBox - recommended storage area for meat and fish
MultiAirflow system - improves circulation of air around the fridge
- SuperCool function


Key features - Freezer section

- SuperFreeze functions with automatic deactivation
- Optical and acoustic door open alarm
- Freezer malfunction warning signal: optical and acoustical warning system
- 3 x egg tray, 1 x ice cube tray
- 3 freezer drawers

Dimension and installation

- Dimensions: 203 cm H x 60 cm W x 66 cm D
- Right hinged door, reversible door
- Height adjustable front feet
- Connection value 100 W
- 220 - 240 V

Series 4, 203 x 60 cm, Black matt KGN39IZEAG

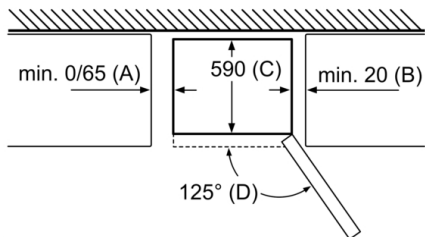


Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:

In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700



Specification
a Height
b Width
c Depth with door closed, without handle
d Cabinet depth
e Width with door opened to 90°
f Depth with door opened
g Depth with door closed, with handle

measurements in mm