


**iQ300, canopy cooker hood, 53 cm,
Silver metallic
LB55564GB**

D

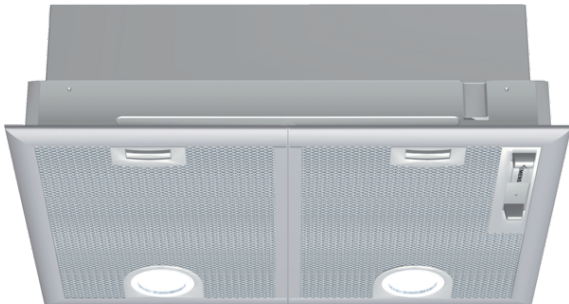

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ The 650 m³/h extraction rate supplies clean air when cooking.
- ✓ At 45 dB the hood is extremely quiet when being used.
- ✓ Great for banishing unwanted steam, grease and cooking smells the intensive setting temporarily increases the extraction rate.

Features

Technical Data

Typology : Traditional
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Required niche size for installation (HxWxD) : 255mm x 500mm x 350mm
 Minimum distance above an electric hob : 650
 Minimum distance above a gas hob : 650
 Net weight (kg) : 7.539
 Type of control : mechanical
 Maximum output air extraction (m³/h) : 420
 Boost position output recirculating (m³/h) : 430
 Maximum output recirculating air (m³/h) : 320
 Boost position air extraction (m³/h) : 650
 Number of lights : 2
 Noise level (dB(A) re 1 pW) : 59
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 EAN code : 4242003654620
 Connection Rating (W) : 240
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : GB plug
 Installation typology : Built-in

Optional accessories

LZ73050 Charcoal odour filter



4 242003 654620

iQ300, canopy cooker hood, 53 cm, Silver metallic LB55564GB

Features

Design

- 53 cm wide
- Silver metallic lacquer
- White electronic display

Key Information

- Slider switch control for extractor speeds and light
- 2 x 20W halogen lights
- 2 x metal grease filter cassettes
- Steel filter cover

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction charcoal filter (accessory) needed
- Extraction rate according to EN 61591 \varnothing 15 cm:
 - max. Normal use 420 m³/h
 - Intensive 650 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 59 dB(A) re 1 pW (45 dB(A) re 20 μ Pa sound pressure)
 - Intensive: 69 dB(A) re 1 pW (55 dB(A) re 20 μ Pa sound pressure)
- 3 x power levels plus intensive setting
-
-
- Noise max. Normal Level: 59 dB*
- Extractor hose 120 mm
- Dimensions (WxD): 530 x 380 mm
- built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Diameter pipe \varnothing 150 mm (\varnothing 120 mm enclosed)
- Light Intensity: 335 lux
- Colour Temperature: 2800 K
- Average Energy Consumption: 111.4 kWh/year*
- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: D*
- Lighting Efficiency Class: F*
- Grease Filtering Efficiency Class: B*

* In accordance with the EU-Regulation No 65/2014