


## iQ700, wall-mounted cooker hood, 90 cm, clear glass white printed LC91KWW20B



A+

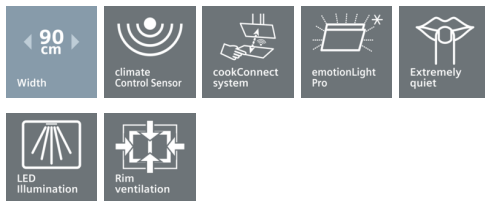

Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ Brushless motor: powerful and quiet extraction of steam.
- ✓ cookConnect System: Control your extractor hood directly from your Cooktop (with matching cooktop).
- ✓ The climateControl Sensor monitors steam and odours and adjusts the power level automatically.
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ Home Connect: Remote access to a selection of features of your extractor hood via smartphone or tablet. (only in countries where Home Connect service is available).

### Features

#### Technical Data

Typology : Chimney  
 Approval certificates : CE, VDE  
 Length electrical supply cord (cm) : 130  
 Height of product, without chimney (mm) : 323  
 Minimum distance above an electric hob : 450  
 Minimum distance above a gas hob : 600  
 Net weight (kg) : 24.412  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction (m<sup>3</sup>/h) : 525  
 Boost position output recirculating (m<sup>3</sup>/h) : 624.0  
 Boost position air extraction (m<sup>3</sup>/h) : 991  
 Number of lights : 2  
 Noise level (dB(A) re 1 pW) : 58  
 Diameter of air outlet (mm) : 120 / 150  
 Grease filter material : Washable aluminium  
 EAN code : 4242003803547  
 Connection Rating (W) : 270  
 Current (A) : 10  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60  
 Plug type : GB plug  
 Installation typology : Wall-mounted



### Optional accessories

LZ56200	CleanAir active carbon filter spare part
LZ10AXL50	Chimney extension 1500 mm
LZ10AXK50	Chimney extension 1000 mm
LZ10AKU00	Standard recirculation kit
LZ10AKT00	Standard recirculation kit (chimless)
LZ10AKS00	Long Life recirculation kit
LZ10AKR00	Long Life recirculation kit (chimless)
LZ10AKA00	Standard odor filter (replacement)
LZ00XXP00	Long Life odor filter (replacement)

## iQ700, wall-mounted cooker hood, 90 cm, clear glass white printed LC91KWW20B

### Features

#### Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 525 m<sup>3</sup>/h
- Intensive 991 m<sup>3</sup>/h
- Noise max. Normal Level: 58 dB\*

#### Features

- climateControl sensor
- emotionLight pro: Ambient light
- Boost function
- cooktop

#### Remote Monitoring and Control (only in countries where Home Connect service is available)

- 3-stage + 2 intensive
- Yes
- 2 x
- Colour Temperature: 3500 K
- BLDC for Ventilation
- Twin channel high performance fan motor
- 10 min.
- 6 min.
- 2 PC
- grease- and charcoal filter
- easy to clean yes
- wall
- Rim extraction

#### Design

- clear glass white printed
- Inclined glass brand design
- Wall mounted chimney hood
- touch control for extractor speeds and light
- Electronic

#### Performance/technical information

- Ducted/Recirculating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Wall fixing inclined/flat/cube
- Max. extraction rate: 991 m<sup>3</sup>/h
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 525 m<sup>3</sup>/h
- Intensive 991 m<sup>3</sup>/h
- Extraction rate in recirculation mode:
- Max. normal use: 447 m<sup>3</sup>/h
- Intensive: 624 m<sup>3</sup>/h
- Noise max. Normal Level: 58 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 58 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
- Intensive: 71 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:
- Max. normal use: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)

- Intensive: 78 dB(A) re 1 pW (65 dB(A) re 20 µPa sound pressure)
- 
- 
- Light Intensity: 519 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 930-1200 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 990-1260 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 454 mm x 890 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1120 x 890 x 499 mm - mounting with outer chimney
- 1190-1460 x 890 x 499 mm - mounting with telescopic chimney
- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 38.5 kWh/year\*

#### Optional accessories

- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014