

IQ700, Ceiling cooker hood, 105 cm, White LR18HLT25



Optional accessories

LZ20JXP00	Long Life odor filter (replacement)
LZ21JXB16	Clean Air Plus odor filter (replacement)

The studioLine varioLift ceiling hood: performance meets design. Lowered for maximum effect when cooking or raised to seamlessly integrate into your kitchen. All the time at your service via voice control.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ cookConnect system and climate control sensor: Perfect cooperation
- ✓ varioLift – Clean air while you're cooking and a clear view afterwards.
- ✓ voiceControl – Control hood functions and lighting using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

Features

Technical Data

Typology:	Island/Ceiling
Length electrical supply cord:	0.0 cm
Minimum distance above an electric hob:	700 mm
Minimum distance above a gas hob:	700 mm
Weight:	61.6 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Boost position output recirculating:	713 m ³ /h
Maximum output recirculating air:	411 m ³ /h
Number of lights:	6
Grease filter material:	Other
EAN code:	4242003831632
Connection Rating:	250 W
Nominal power:	220-240 V
Frequency:	50; 60 Hz
Plug type:	no plug (electrical connection by electrician)
Installation type:	Island
Delay Shut off modes:	10 min



IQ700, Ceiling cooker hood, 105 cm, White LR18HLT25

Features

Home Connect: Remote Monitoring and Control

- Home Connect: Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- Adjustable color temperature (2.700 K - 5.000 K) for adaption to the room lighting available via Home Connect
- Interval function: available via Home Connect
- Silence function: available via Home Connect
- Automated delay shut-off for the best performance and increased lifespan of the CleanAir odour filters (can be adjusted and deactivated via the Home Connect app)

Features

- Lift function: Individual height adjustment of your cooker hood and additionally the Home Connect app can store up to 5 different heights.
- cookConnect hob based hood control
- climateControl sensor, Automated delay shut-off for the best performance and increased lifespan of the CleanAir odour filters (can be adjusted and deactivated via the Home Connect app)
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- softLight with dimmer function
- 6 x 3W LED lights
- Fully automatic hood
- Interval operation
- Efficient BLDC motor
- Automatic after running (10 minutes)
- Infrared remote control
- 3 x metal grease filter cassettes - dishwasher safe
- Black grease filter with stainless steel frame
- Grease and charcoal filter saturation indicators
- CleanAir Plus charcoal filter included at first delivery.
- Easy to clean inner frame

Design

- White
- For ceiling mounted installation
- Installation system: Ceiling module, glass
- Glass ceiling plate and adjustable length of cables up to 1200 mm
- Glass filter cover, Steel filter cover
- Rim ventilation
- Electronic control

Performance/technical information

- Suitable for recirculated extraction
- Max. extraction rate: 729 m³/h

- Extraction rate in recirculation mode with Clean Air Plus odor filter:
- Max. normal use:422m³/h
- Intensive:729m³/h
- Noise level in recirculation mode with Clean Air Plus odor filter : Max. normal use:62dB(A) re 1 pW
- Intensive:76 dB(A) re 1 pW
- Power rating: 250 W
- Light Intensity: 1156 lux
- Dimensions in recirculation mode (HxWxD): 253 x 1050 x 600 mm

Optional accessories

- Recirculating kit LZ20JXP00


Standard accessory

- * In accordance with the EU-Regulation No 65/2014


**IQ700, Ceiling cooker hood, 105 cm, White
LR18HLT25**

Dimensioned drawings

measurements in mm

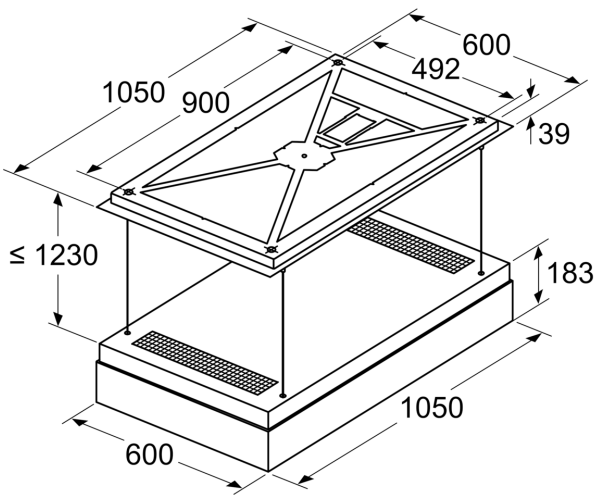


measurements in mm
Recommended for ceiling heights
up to 3500 mm

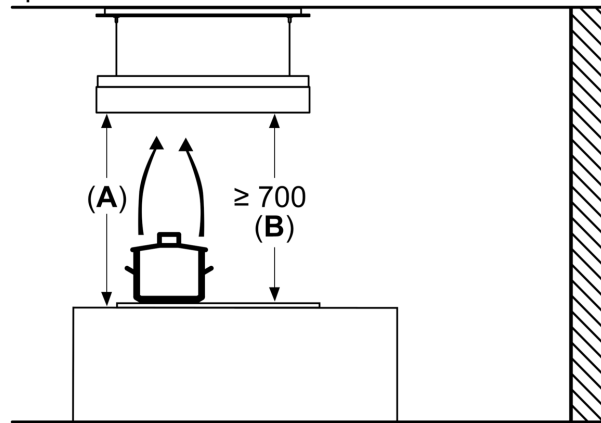

A: Optimum performance 700-1500
B: From upper edge of pan support

measurements in mm
Ceiling storage recess

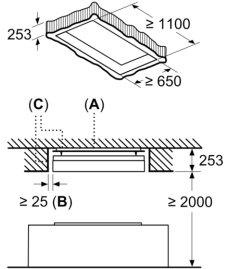

A: Concrete ceiling
B: ≥ 25 mm all around
C: Depending on the cooking method,
residual moisture may escape from
the appliance even after use.
We therefore recommend treating
the ceiling storage recess with a paint
that prevents mould formation.