


Series 6, Domino hob, induction, 30 cm, Black, PIB375FB1E

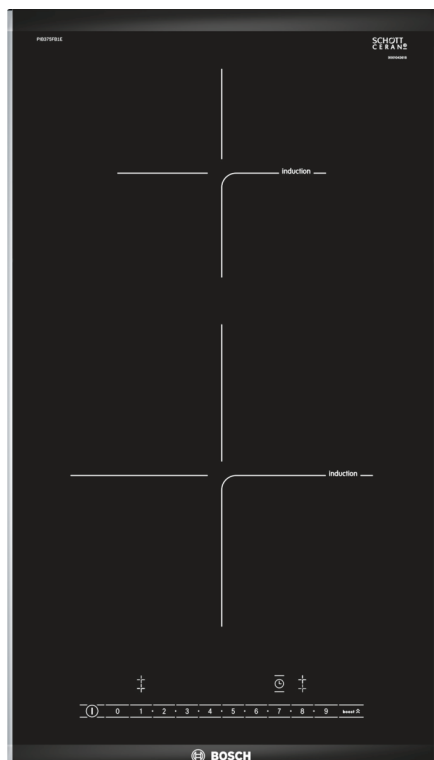

Optional accessories

HEZ32WA00	Wireless food thermometer
HEZ390090	Wok Set consisting of 3 Items
HEZ394301	Connecting strip
HEZ9ES100	Espresso maker 4 cups
HEZ9FE280	Iron pan Ø 18 / 28 cm
HEZ9SE030	Set of 2 pots and 1 pan
HEZ9SE040	4 pieces Set
HEZ9SE060	6 pieces Set

The induction hob of the Domino programme: cook quickly, safely and cleanly with low energy consumption.

- **ComfortProfil:** Elegant, appealing design with bevelled front and metal strips on the side.
- **PowerBoost:** up to 50% more power for faster heating on your induction hob.
- **If you turn off the cooktop it saves the last selected setting for a short time. If the cooktop is switched of within a short time again the former settings are still available.**
- **Timer with switch-off function:** Turns off the assigned cooking zone after the set time.
- **The handy ChildLock locks the control panel to prevent accidental changes in settings.**

Technical Data

Product name/family:	Vario/Domino cooking zone cera
Product name/family:	Vario/Domino cooking zone cera
Built-in / Free-standing:	Built-in
Built-in / Free-standing:	Built-in
Energy input:	Electric
Energy input:	Electric
Number of cooking zones:	2
Number of cooking zones:	2
Min. required niche size for installation (HxWxD): 51 x 270 x 490-500 mm	
Min. required niche size for installation (HxWxD): 51 x 270 x 490-500 mm	
Width of the appliance:	306 mm
Width of the appliance:	306 mm
Dimensions:	51 x 306 x 527 mm
Dimensions:	51 x 306 x 527 mm
Dimensions of the packed product (HxWxD):	110 x 370 x 573 mm
Dimensions of the packed product (HxWxD):	110 x 370 x 573 mm
Net weight:	6.3 kg
Net weight:	6.3 kg
Gross weight:	7.5 kg
Gross weight:	7.5 kg
Residual heat indicator:	Separate
Residual heat indicator:	Separate
Location of control panel:	Front
Location of control panel:	Front
Basic surface material:	Ceramic glass
Basic surface material:	Ceramic glass
Color of surface:	Black, Alu, brushed
Color of surface:	Black, Alu, brushed
Length electrical supply cord:	110.0 cm
Length electrical supply cord:	110.0 cm
EAN code:	4242002848631
EAN code:	4242002848631
Voltage:	220-240 V
Voltage:	220-240 V
Frequency:	50; 60 Hz
Frequency:	50; 60 Hz



Series 6, Domino hob, induction, 30 cm, Black, PIB375FB1E

the maximum power if needed (depends on fuse protection of electric installation).

- Power cord: 1.1 m, Cable included

The induction hob of the Domino programme: cook quickly, safely and cleanly with low energy consumption.

Design

- Profile trim (front facette with side trim)
- 30 cm: space for 2 pots or pans.

Flexibility of cooking zones

- Cooking zone middle: 210 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone middle: 145 mm, 1.4 KW (max. power 2.2 KW)

Usage convenience

- DirectSelect touch control: directly control the power with imprinted touch bar.
- Variable 17-stage power settings for each zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Timer for all zones
- : switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Timer - shows how long the cooktop is in use
- : an alarm sounds at the end of the time set (e.g. for pasta).
- Count up timer per cooktop
- : shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- PowerBoost function for all zones
- : boil water faster thanks to 50% more energy than at the highest standard level.
- QuickStart function: when switching on, the hob automatically selects the cooking zone with cookware (when placed on a zone whilst the hob is off).
- ReStart function: in case of unintentional switch-off, this feature restores all previous settings by switching on the hob again within 4 seconds

Safety


- 2 stage residual heat indicator for each zone: indicates which cooking zones are still hot or warm.
- Control panel lock: prevent unintended activation of the hob.
- Main on/off switch: switch off all cooking zones at the touch of a button.
- Safety cut-out switch-off: for safety reasons, heating stops after a preset time if not used (possible to customise).
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation

- Dimensions of the product (HxWxD mm): 51 x 306 x 527
- Required niche size for installation (HxWxD mm) : 51 x 270 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 3.7 KW
- Power management options for 16A, 13A or 10A connection: limit


Series 6, Domino hob, induction, 30 cm, Black, PIB375FB1E

Measurements in mm

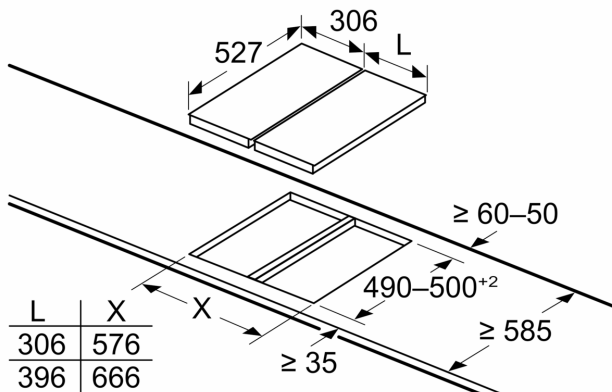

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)


measurements in mm




A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

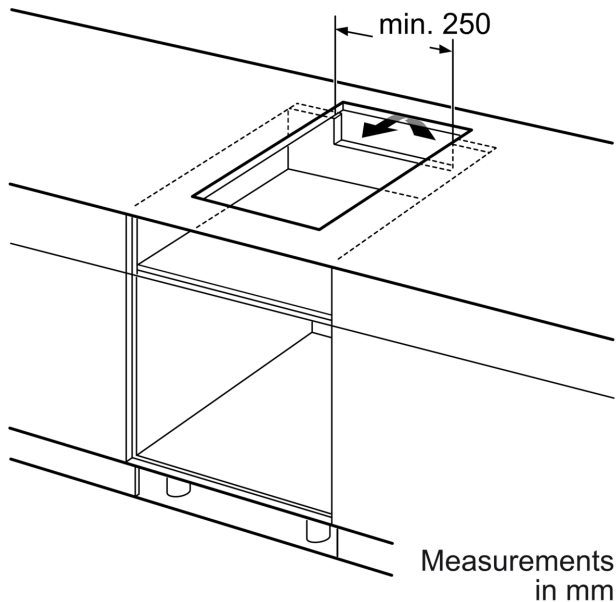


Measurements in mm

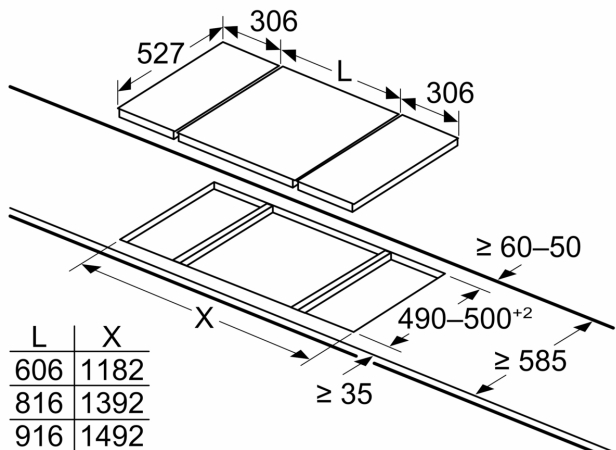


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

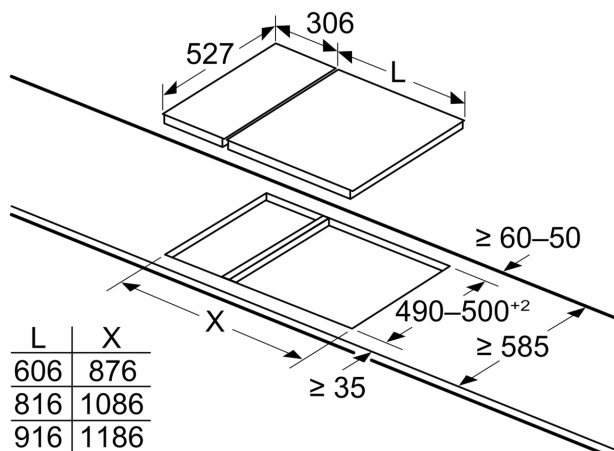


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

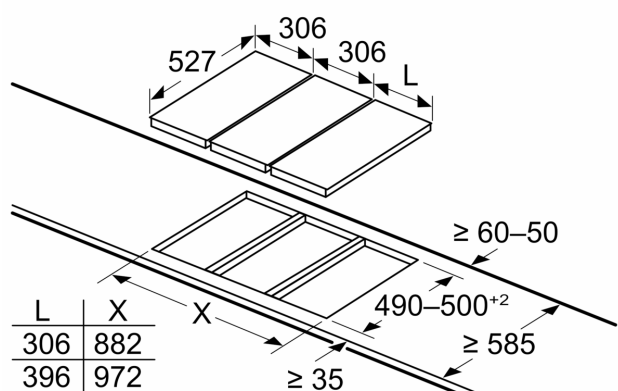


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions




If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)

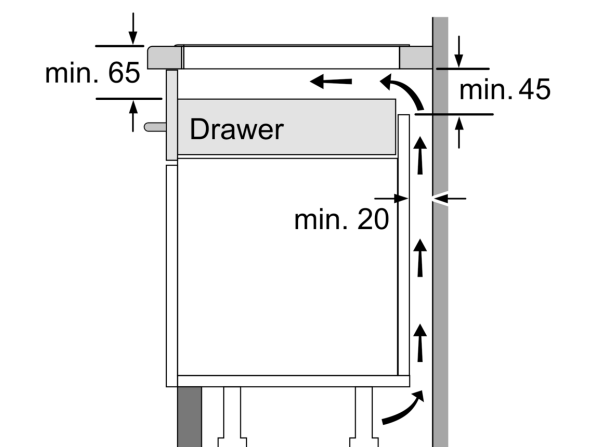

Measurements in mm

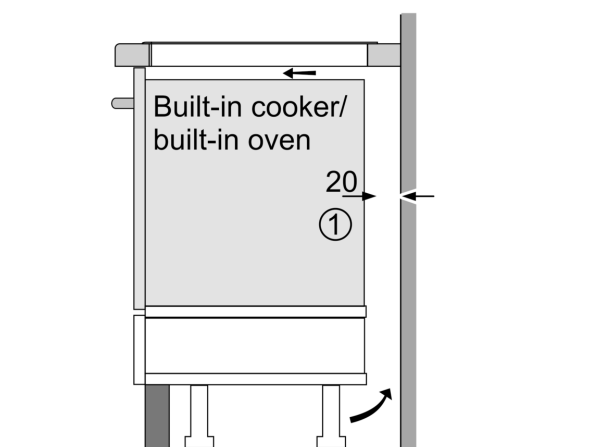

①
Ventilation gap must
be present.

Measurements in mm


measurements in mm
Domino combination options with
corresponding appliance and cut-out dimensions

Width category:
Appliance width:

	A	B	C	D	L	X		
2x30	306	306	-	-	-	-	612	576
1x30, 1x40	306	396	-	-	-	-	702	666
1x30, 1x60	306	606	-	-	-	-	912	876
1x30, 1x70*	306	710	-	-	-	-	1016	980
1x30, 1x80	306	816	-	-	-	-	1122	1086
1x30, 1x90	306	916	-	-	-	-	1222	1186
2x40	396	396	-	-	-	-	792	756
1x40, 1x60	396	606	-	-	-	-	1002	966
1x40, 1x70*	396	710	-	-	-	-	1106	1070
1x40, 1x80	396	816	-	-	-	-	1212	1176
1x40, 1x90	396	916	-	-	-	-	1312	1276
3x30	306	306	306	-	-	-	918	882
2x30, 1x40	306	306	396	-	-	-	1008	972
2x30, 1x60	306	306	606	-	-	-	1218	1182
2x30, 1x70*	306	306	710	-	-	-	1322	1286
2x30, 1x80	306	306	816	-	-	-	1428	1392
2x30, 1x90	306	306	916	-	-	-	1528	1492
1x30, 2x40	306	396	396	-	-	-	1098	1062
1x30, 1x40, 1x60	306	396	606	-	-	-	1308	1272
1x30, 1x40, 1x70*	306	396	710	-	-	-	1412	1376
1x30, 1x40, 1x80	306	396	816	-	-	-	1518	1482
1x30, 1x40, 1x90	306	396	916	-	-	-	1618	1582
2x40, 1x60	396	396	606	-	-	-	1398	1362
4x30	306	306	306	306	-	-	1224	1188
3x30, 1x40	306	306	306	396	-	-	1314	1278
1x30, 1x75	306	750	-	-	-	-	1056	1020
1x40, 1x75	396	750	-	-	-	-	1146	1110
2x30, 1x75	306	306	750	-	-	-	1362	1326
1x30, 1x40, 1x75	306	396	750	-	-	-	1452	1416

* Not possible with 70 cm induction hob

Measurements in mm
Assembly kit (HEZ394301) for Domino

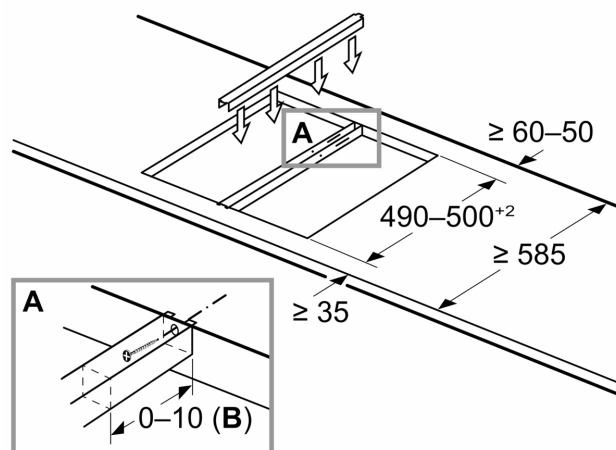

B: Dependent on the cut-out depth