


**Series 8, Domino hob, gas, 30 cm,  
Ceramic glass, Black  
PRB3A6B70**

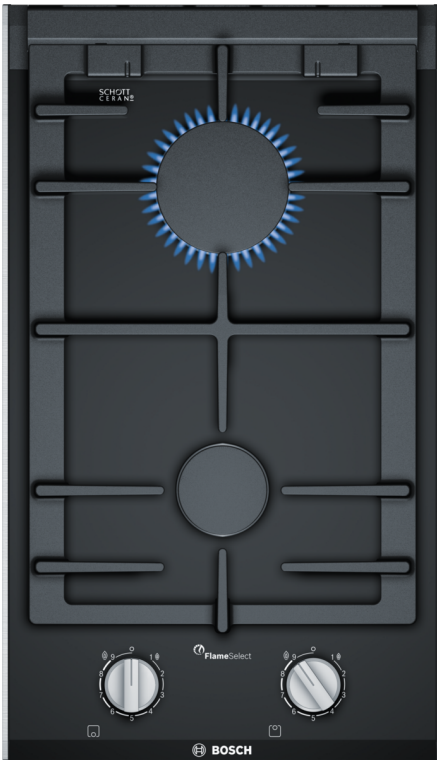

**The domino gas hob with FlameSelect:  
achieve perfect cooking results thanks to  
nine precisely defined power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Dishwasher-proof pan supports:** make cleaning your hob even easier.
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.
- **Biomethane-ready:** your gas hob can also be powered with renewable biomethane gas.
- **Sword knobs:** for an ergonomic control.

**Technical Data**

Product name/family: .....	Vario/Domino gas hob w control
Product name/family: .....	Vario/Domino gas hob w control
Built-in / Free-standing: .....	Built-in
Built-in / Free-standing: .....	Built-in
Energy input: .....	Gas
Energy input: .....	Gas
Number of cooking zones: .....	2
Number of cooking zones: .....	2
Min. required niche size for installation (HxWxD):	45 x 270 x 490-500 mm
Min. required niche size for installation (HxWxD):	45 x 270 x 490-500 mm
Width of the appliance: .....	306 mm
Width of the appliance: .....	306 mm
Dimensions: .....	47 x 306 x 527 mm
Dimensions: .....	47 x 306 x 527 mm
Dimensions of the packed product (HxWxD): .....	190 x 380 x 580 mm
Dimensions of the packed product (HxWxD): .....	190 x 380 x 580 mm
Net weight: .....	7.0 kg
Net weight: .....	7.0 kg
Gross weight: .....	7.9 kg
Gross weight: .....	7.9 kg
Residual heat indicator: .....	without
Residual heat indicator: .....	without
Location of control panel: .....	Front
Location of control panel: .....	Front
Basic surface material: .....	Ceramic glass
Basic surface material: .....	Ceramic glass
Color of surface: .....	Black, Alu, brushed
Color of surface: .....	Black, Alu, brushed
Color of frame: .....	Black
Color of frame: .....	Black
Length electrical supply cord: .....	150.0 cm
Length electrical supply cord: .....	150.0 cm
EAN code: .....	4242005357291
EAN code: .....	4242005357291
Gas connection rating: .....	4700 W
Gas connection rating: .....	4700 W
Fuse protection: .....	3 A
Fuse protection: .....	3 A
Voltage: .....	220-240 V
Voltage: .....	220-240 V
Frequency: .....	50; 60 Hz
Frequency: .....	50; 60 Hz

**Optional accessories**

HEZ298105	Simmer plate
HEZ298114	Small pot support
HEZ394301	Connecting strip



**Series 8, Domino hob, gas, 30 cm,  
Ceramic glass, Black  
PRB3A6B70**

**The domino gas hob with FlameSelect:  
achieve perfect cooking results thanks to  
nine precisely defined power levels.**

---

**Design**

- ceramic glass surface, Black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

**Usage convenience**

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

**Burners and power**

- Two gas burners:
- Center front: Standard burner 1.9 KW up to 1.9 KW (depending on gas type)
- Center rear: High-speed burner up to 2.8 KW (depending on gas type)

**Safety**


- Flame failure safety device: prevents unwanted gas flow when flame goes out.

**Installation (gas types & measurements)**

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 47 x 306 x 527
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 4.7 KW

**Series 8, Domino hob, gas, 30 cm,  
Ceramic glass, Black  
PRB3A6B70**


Measurer



L	X
306	57
396	66

If two or more  
to one are required  
are required


Measurer



L	X
606	118
816	139
916	149

When installed  
a hob, two  
required


Measurer



L	X
606	87
816	108
916	118

When installed  
a hob, two  
required


Measurer



L	X
306	88
396	97

If two or more  
to one are required  
elements

Measurements in  
Picture for the tab  
cutout dimension:





IT  
D  
C

W  
A

2  
1:  
1:  
1:  
1:  
2:  
1:  
1:  
1:  
1:  
1:  
3:  
2:  
2:  
2:  
2:  
1:  
1:  
1:  
1:  
2:  
4:  
3:  
1:  
2:  
1:  
\*

Measurer  
Assembl



B: Depen

45

\*min.  
100

\* Minimum  
the hot  
\*\* Positio  
\*\*\* With fit  
see sp