

Series 6, semi-integrated dishwasher, 60 cm, Stainless steel SMI68TS06E



Optional accessories

SGZ1010	inlet and outlet hose extension
SMZ1051EU	Mains cable with EU-Plug 5m
SMZ2014	Rack insert for stemware dishwasher
SMZ2044	Plinth casing and door, stainless steel
SMZ5000	Dishwashing aid set
SMZ5003	Retractable hinge f. high corpus dimens.
SMZ5005	Compensating + fixing kit, stainl. steel
SMZ5035	Decor conversion kit, stainless steel
SMZ5100	Vario-cutlery basket
SMZ5300	GlassSecure Tray

Rely on PerfectDry for excellent drying results on challenging dishes, glassware and even plastic.

- **PerfectDry based on Zeolith®:** perfect drying results with 3D Airflow even on plastic dishes.
- **Silence Program and SuperSilence:** remarkably quiet at 42 dB, more so with the Silence program.
- **VarioDrawer:** Adjust parts of the basket to make space for more glasses and cutlery.
- **Rackmatic:** even more adjustment options and thus maximum flexibility.
- **Rackmatic:** height-adjustable dishwasher basket for tall items.

Technical Data

Energy Efficiency Class:	D
Energy Consumption for 100 cycles Eco Programme:	85 kWh
Maximum number of place settings:	14
The water consumption of the eco programme in liters per cycle: 9.5 l	
Programme duration:	3:15 h
Airborne acoustical noise emissions :	42 dB(A) re 1 pW
Airborne acoustical noise emission class:	B
Built-in / Free-standing:	Built-in
Height of removable worktop:	0 mm
Dimensions of the product (HxWxD):	815 x 598 x 573 mm
Min. required niche size for installation (HxWxD):	815-875 x 600 x 550 mm
Depth with open door 90 degree:	1150 mm
Adjustable feet:	Yes - all from front
Maximum adjustability feet:	60 mm
Adjustable plinth:	Both horizontal and vertical
Net weight:	47.7 kg
Gross weight:	50.0 kg
Connection rating:	2400 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	60; 50 Hz
Length electrical supply cord:	175.0 cm
Plug type:	Gardy plug w/ earthing
Length inlet hose:	165 cm
Length outlet hose:	190 cm
EAN code:	4242002959900
Installation typology:	Semi-integrated



Series 6, semi-integrated dishwasher, 60 cm, Stainless steel SMI68TS06E

**Rely on PerfectDry for excellent drying
results on challenging dishes, glassware
and even plastic.**

- steam protection plate
- Self-cleaning filter system with 3 piece corrugated filter
- Front-adjustable rear foot
- Dimensions (HxWxD): 81.5 x 59.8 x 57.3cm

Performance

- Noise level (silence programme): 40 dB(A) re 1 pW

Programmes/functions

- 8 programmes: Intensiv 70 °C, Auto 45-65 °C, Eco 50 °C, Silence 50°C, Short, Glas 40 °C, Schnell 45 °C, Vorspülen
- 4 special options: Remote Start, VarioSpeedPlus, Hygiene+, Extra Dry
- Special program 1: Machine Care
- 6 temperatures
- Zeolith - Energy efficient and perfect drying results

Flexible design elements

- VarioFlex Pro basket system Basket system with red coloured touchpoints
- VarioDrawer
- 3 stage Rackmatic height-adjustable top basket
- Lower rack handle: BO s/s-middle grey-red
- 6 foldable plate racks in top basket
- 8 foldable plate racks in bottom basket
- Upper rack cup shelf
- Glass rack in bottom basket

Innovations and technology


- Home Connect ready on WLAN
- Heat exchanger.
- DosageAssist detergent dispenser
- Automatic detergent detection
- ActiveWater hydraulic water system
- EcoSilence BLDC drive
- AquaSensor III
- AquaMix - Glass protection system
- AquaStop: Bosch's warranty in case of water damage - for the lifetime of the appliance. Please find warranty terms under <https://www.bosch-home.co.uk/customer-service/care-protection-and-parts/additional-warranties>
- Curved spray arms

Design features

- Touch control
- Real-time clock - actual time is displayed
- Control buttons on front of fascia
- water inlet indicator
- Time delay (3, 6 or 24 hours)
- Black display with white text
- Tamperproof controls
- Stainless steel interior
- Display colour: Red LED indicators
- LED salt refill indicator, LED rinse aid refill indicator
- Alternating spray arms

**Series 6, semi-integrated
dishwasher, 60 cm, Stainless steel
SMI68TS06E**

measurements in mm

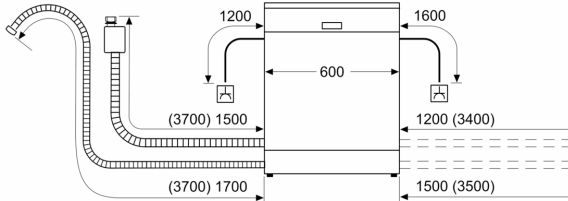

⌚ socket
() values with extension kit

