



iQ700, Induction hob with integrated ventilation system, 80 cm, surface mount with frame EX875LX34E

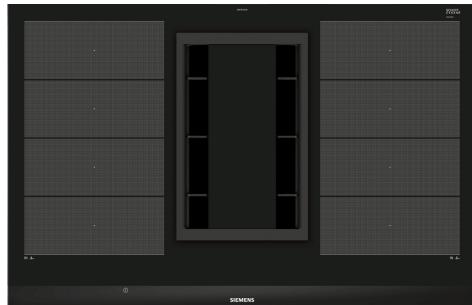

HZ381401 Exhaust kit, HZ381501 Recirculating kit, HZ381700 Recirculation filter, HZ390011 Stainless Steel roaster with glass lid, HZ390012 Steaming Rack for Stainless Steel roaster, HZ390090 Wok Set consisting of 3 Items, HZ390210 System pan diameter 15 cm, HZ390220 System pan diameter 19 cm, HZ390230 System pan diameter 21 cm, HZ39050 Wireless temperature sensor for cooktop, HZ390511 Teppan Yaki (small), HZ390512 Teppan Yaki (large), HZ390522 Griddle Plate, HZ394301 Connecting strip, HZ9SE030 Set of 2 pots and 1 pan

Induction cooktop with integrated downdraft ventilation unit

- ✓ flexInduction adapts the cooking zones to different cookware and pots up to 24 cm diameter – for more flexibility.
- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures – activated by touch.
- ✓ Dual lightSlider lets you easily and intuitively operate the hob.
- ✓ The climateControl Sensor monitors steam and odors and adjusts the power level automatically.
- ✓ For more energy efficient cooking - energy consumption display.

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD): 198 x 780-780 x 490-500 mm
Width of the appliance: 812 mm
Dimensions: 198x812x520 mm
Dimensions of the packed product (HxWxD): 330 x 760 x 940 mm
Net weight: 27.1 kg
Gross weight: 33.4 kg
Residual heat indicator: Separate
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black, Alu, brushed
Length electrical supply cord: 110.0 cm
Sealed Burners: No
Heating with booster: All
Power of 2nd heating element (kW): 3.3 kW
Number of speed settings: 9-stage + intensive
Maximum output air extraction: 551 m³/h
Boost position output recirculating: 630.0 m³/h
Maximum output recirculating air: 557 m³/h
Boost position air extraction: 698 m³/h
Noise level: 70 dB(A) re 1pW
Odour filter: No
Air circulation: Convertible
Grease filter type: Multilayer cassette
Clean filter reminders: Yes
Voltage: 220-240 V
Frequency: 60; 50 Hz



4 242003 763988

iQ700, Induction hob with integrated ventilation system, 80 cm, surface mount with frame EX875LX34E

<p>Power and size</p> <ul style="list-style-type: none">• 4 induction cooking zones• 2 Flex zones• 5 frying levels: Frying with integrated sensor for All Flex zones• 17 power levels <p>Design</p> <ul style="list-style-type: none">• Stainless steel faceted design with front facette and side profiles• Dual LightSlider <p>Comfort</p> <ul style="list-style-type: none">• Timer with switch-off function for all zones, count-up timer, per cooktop, Count down function• 3-steps• QuickStart Function• Boost function for all zones• Automatic pan recognition• power management function Automatic safety switch off Safety lock Wipe protection function• Main switch <p>Integrated ventilation system</p> <ul style="list-style-type: none">• Induction/Ventilation Cooktop, Autarkic• Extraction rate according to EN 61591:<ul style="list-style-type: none">• - min. Normal use169 m³/h• - max. Normal use551 m³/h• - Intensive setting698 m³/h• Performance in re-circulated extraction:<ul style="list-style-type: none">• - min. normal setting139 m³/h• - max. normal setting557 m³/h• - Boost-/Intensive setting630 m³/h• Noise min./max. normal setting (ducted extraction): 42/70 db(A)• 9 fan speed levels plus 1 intensive setting• Suitable for ducted or re-circulated extraction (Accessory is required)• For ducted extraction extraction kit (accessory HZ381400) needed• For recirculated extraction cleanAir recirculating kit (accessory HZ381501) needed• Automatic switch-on of ventilation system when a cooking zone is used• Sensor-based, fully automatic adjustment of power levels (manual control possible)• Automatic 30 minutes run-on function• High-performance blower, Efficient BLDC-technology• Cast-iron air inlet grid, heat resistant, dishwasher safe• Removable and detachable grease filter and liquid collector unit, dishwasher safe• - integrated stainless steel grease filters, dishwasher safe - condensate and liquid collector unit; ca. 200ml capacity; dishwasher safe	<ul style="list-style-type: none">• Liquid spillover safety tank, ca. 2.000ml capacity, Twist-off lock, dishwasher safe• Saturation indicator for grease filter• Saturation indicator for cleanAir odor filter <p>Technical Information</p> <ul style="list-style-type: none">• Floor cupboard width: min. 80 cm.• Worktop depth: min. 60 cm (with shortened drawers), max. drawer's depth can be used starting with a worktop depth of 70 cm.• Immersion depth: 19.8 cm• Modules for ducted extraction or re-circulated extraction must be ordered separately as special accessory.• The appliance must be freely accessible from below.• Appliance dimensions (H x W x D): 20 cm x 81 cm x 52 cm• Length wire connection: 110 cm• Total Connected load: 7.4 KW

iQ700, Induction hob with integrated ventilation system, 80 cm, surface mount with frame EX875LX34E

