

**iQ700, Built-in oven, 60 x 60 cm,
Stainless steel
HB634GBS1I**



The oven offers modern baking and roasting convenience for best results.

- ✓ Reach the required baking temperature sooner - fastPreheat. No need to preheat the oven for deep frozen food - coolStart.
- ✓ Cut down on oven cleaning – ecoClean.
- ✓ TFT Display: good readability from any perspective.
- ✓ 4D hotAir: flexible choice of shelf.
- ✓ softMove: gentle opening and closing of the oven door.

Gross weight: 38.2 kg
 Built-in / Free-standing: Built-in
 Integrated Cleaning system: activeKlean setting, Hydrolytic
 Min. required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
 Dimensions: 595 x 594 x 548 mm
 Dimensions of the packed product (HxWxD): ... 675 x 660 x 690 mm
 Control Panel Material: Stainless steel
 Door Material: Glass
 Net weight: 35.8 kg
 Usable volume of cavity: 71 l
 Heating Types:4D hot air, Full width grill, Hot Air-Eco, Half width grill, Conventional heat, Conventional heat ECO, Pizza setting, low temperature cooking, Deep-frozen food special, Bottom heat, Hot air grilling, pre-heating, warming
 Number of interior lights: 1
 Length electrical supply cord: 120.0 cm
 Interior Lights - cavity 1: 1
 Pull-out system: Accessory
 Included accessories: 1 x enamel baking tray, 1 x combination grid, 1 x universal pan
 Broil Element Wattages cavity 1: 2800 W
 Convection Element Wattages cavity 1: 2200 W
 Energy efficiency rating: A+: efficient
 Energy consumption per cycle conventional (2010/30/EC): 0.87 kWh/cycle
 Energy consumption per cycle forced air convection (2010/30/EC): 0.69 kWh/cycle
 Energy efficiency index (2010/30/EC): 81.2 %
 Connection Rating: 3600 W
 Fuse protection: 16 A
 Voltage: 220-240 V
 Frequency: 60; 50 Hz
 Plug type: India plug (16 Ampere)
 Energy input: Electric
 Required cutout/niche size for installation (in): x
 Dimensions of the packed product: 26.57 x 25.98 x 27.16
 Net weight: 79.000 lbs
 Gross weight: 84.000 lbs
 Length electrical supply cord: 120.0 cm
 Net weight: 35.8 kg

1 x enamel baking tray, 1 x combination grid, 1 x universal pan

HZ327000 Baking stone, HZ531010 Baking tray, non-stick ceramic coated, HZ532010 Universal pan, non-stick ceramic coated, HZ617000 Pizza pan, enamelled, HZ625071 Grill tray, enamelled, HZ631070 Baking tray, enamelled, HZ632070 Multipurpose pan, enamelled, HZ633001 Lid for professional pan, enamelled, HZ633070 Professional pan, enamelled, HZ634000 Baking and roasting grid (standard), HZ636000 Glass pan, HZ638100 1 level telescopic shelf rails, full ext, HZ638200 2 level telescopic shelf rails, full ext, HZ638300 3 level telescopic rails, full ext, HZ664000 Baking and roasting grid (steam), HZ66X650 Cover Strip, HZ915003 Glass roasting dish, 5,4 L



**iQ700, Built-in oven, 60 x 60 cm,
Stainless steel
HB634GBS1I**

Design

- Full-glass inner door
- Rotary control knob
- LED display control (red)
- Bar handle

Heating Functions

- Cavity volume: 71 l
- Oven with 13 heating methods:
- 4D hot air
- Hot Air-Eco Conventional heat Conventional heat ECO hot air grilling
Full width grill Half width grill pizza setting Deep-frozen food special
bottom heat Soft steaming Plate warming setting Hold warm setting



Comfort

- Cavity inner surface: enamel anthracite
- Temperature range 30 °C - 300 °C
- EcoLyse features: back panel
- electronic clock with LED display
- Rapid heating-up
- Rapid heating-up: automatic
- Integral cooling fan
- Electronic functions :
- Temperature proposal
- Heating-up control Actual temperature display Sabbath setting
- Child lock
- Automatic safety switch off residual heat indicator Start-/Stop button
door contact switch
- softMove: gentle opening and closing of the oven door

Technical Information

- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Required niche size for installation (HxWxD): 585 mm - 595 mm x
560 mm - 568 mm x 550 mm
- Total connected load electric: 3.6 KW

iQ700, Built-in oven, 60 x 60 cm,
 Stainless steel
 HB634GBS1I

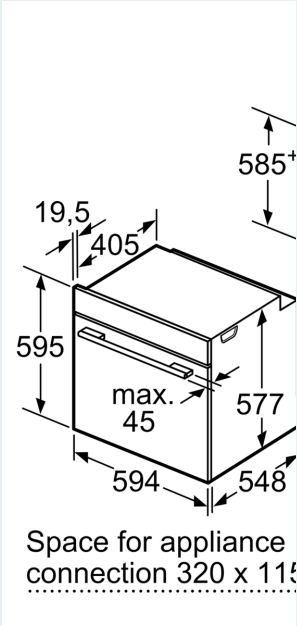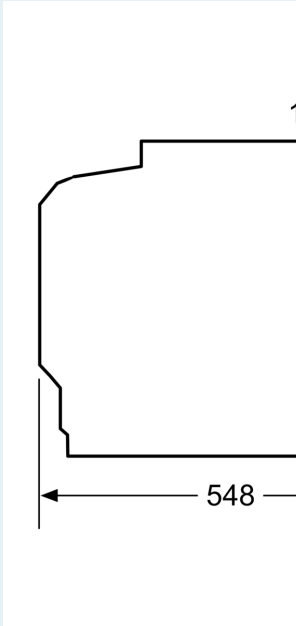

If the appliance will be used as a hob, the following width (including substructure) must be taken into account.

Hob type	minimum width
Induction hob	300 mm
Full surface Induction hob	400 mm
Gas hob	300 mm
Electric hob	200 mm

