

**iQ500, wall-mounted cooker hood, 90 cm, Stainless steel LC97BCP50I**



LZ00XXP00 Long Life odor filter (replacement), LZ10FXJ05 Long Life recirculation kit, LZ11CXI16 Clean Air Plus recirculation kit, LZ12265 Chimney extension 1000 mm, LZ12365 Chimney extension 1500 mm, LZ12CBI14 Clean Air Standard recirculation kit, LZ12CXC56 Clean Air Plus recirc. kit external, LZ12FXD51 Long Life recirculation kit external, LZ31XXB16 Clean Air Plus odor filter (replacement), LZ32CBB14 Clean Air Standard odor filter (repl.), LZ50960 Backboard 90x65cm, LZ50961 Backboard 90 x 72 cm, LZ53450 Standard recirculation kit, LZ53451 Standard odor filter (replacement)

The powerful wall hood convinces with a high extraction rate and an outstanding design.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ LED light: Optimal visibility and atmosphere when cooking.
- ✓ The power level and the LED light can be selected directly – touchControl
- ✓ Pleasantly quiet - motor.
- ✓ Intensive setting with automatic after revert setting

Typology: ..... Wall-mounted  
 Length electrical supply cord: ..... 130.0 cm  
 Height of the chimney: ..... 582-908/568-1018 mm  
 Height of product, without chimney: ..... 46 mm  
 Net weight: ..... 20.3 kg  
 Type of control: ..... Electronic  
 Number of speed settings: ..... 3-stage + 2 intensive  
 Maximum output air extraction: ..... 438 m³/h  
 Boost position output recirculating: ..... 442 m³/h  
 Maximum output recirculating air: ..... 343 m³/h  
 Boost position air extraction: ..... 719 m³/h  
 Number of lights: ..... 3  
 Noise level: ..... 55 dB(A) re 1 pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: ..... Washable aluminium  
 Odour filter: ..... No  
 Air circulation: ..... Convertible  
 Optional accessories: ..... LZ00XXP00, LZ10FXJ05, LZ11CXI16, LZ12265, LZ12365, LZ12CBI14, LZ12CXC56, LZ12FXD51, LZ31XXB16, LZ32CBB14, LZ50960, LZ50961, LZ53450, LZ53451  
 Type of lamps used: ..... LED  
 Grease filter type: ..... Multilayer cassette  
 Connection Rating: ..... 145 W  
 Fuse protection: ..... 10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... India plug (6 Ampere)  
 Type: ..... Wall-mounted  
 Material body: ..... Stainless steel  
 Plug type: ..... India plug (6 Ampere)  
 Dimensions of the product, with chimney (if exists) (in): ..... x x  
 Dimensions of the packed product: ..... 23.03 x 25.59 x 38.18  
 Net weight: ..... 45.000 lbs  
 Gross weight: ..... 59.000 lbs  
 Motor location: ..... Integrated motor in hood chimney  
 No-return airflow flap: ..... Yes  
 Length electrical supply cord: ..... 130.0 cm  
 Dimensions of the product, with chimney (if exists): ..... 614-1064 x 898.0 x 500.0 mm  
 Dimensions of the packed product (HxWxD): ... 585 x 650 x 970 mm  
 Net weight: ..... 20.3 kg  
 Gross weight: ..... 26.6 kg  
 Delay Shut off modes: ..... 10 min



**iQ500, wall-mounted cooker hood, 90 cm, Stainless steel LC97BCP50I**

**Design**

- Box design
- 90 cm stainless steel Box design hood
- Appliance colour: stainless steel
- For wall mounted installation
- Touch control with 7-segment display

**Performance**

- 3 speeds plus 2 intensive
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use: 438 m³/h
- Intensive: 719 m³/h
- Extraction rate in recirculation mode:
- Max. normal use: 373 m³/h
- Intensive: 522 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Intensive: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:
- Max. normal use: 66 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Intensive: 73 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)

**Comfort**

- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- Boost function
- easy to clean innerframe
- Light dimmer function
- Softlight with dimmer function
- Efficient BLDC-technology
- 3 x 1.5W LED
- Saturation display filter: grease- and charcoal filter
- Steel filter cover, dishwasher safe
- Additional noise reduction insulation
- Back-pressure flap: Yes
- Energy Efficiency Class: A
- Average Energy Consumption: 34.4 kWh/year\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*

**Technical Information**


- Suitable for ducted and re-circulating operation only
- Recirculation kit or clean air kit
- Chimney hood wall fixing system
- Dimensions recirculating with CleanAir module (HxWxD):
- 689 x 898 x 500mm - mounting with outer chimney
- 795-1139 x 898 x 500 mm - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 614-954 x 898 x 500 mm
- Dimensions recirculating (HxWxD): 614-1064 x 898 x 500 mm
- Total Connected load: 145 W
- Connecting cable 130 cm

- Voltage: 220 - 240 V


\* In accordance with the EU-Regulation No 65/2014

iQ500, wall-mounted cooker hood, 90 cm, Stainless steel LC97BCP50I


measurements in mm

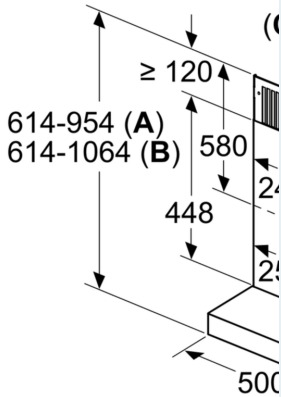

- A: Air extraction
- B: Air recirculation
- C: Air outlet – slots for to be mounted facia

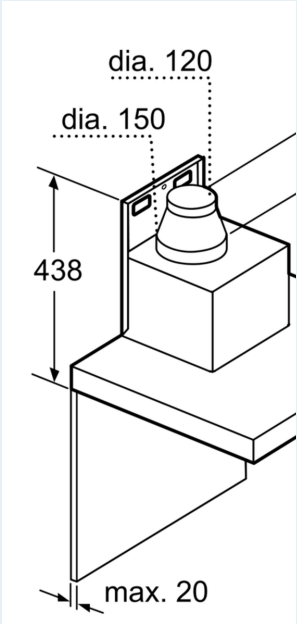


Measurements in mm

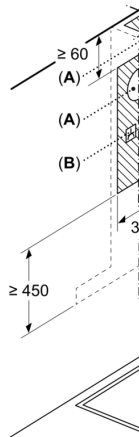

- A: Exhaust air outlet
- B: Socket
- C: Electric
- D: Gas - from upper
- E: Electric - for Austr

Measurements in mm

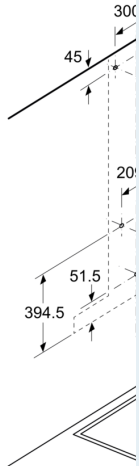

- A: Electric
- B: Gas - from upper
- C: Electric - for Austr