

iQ300, telescopic cooker hood, 90 cm, Silver metallic
LI97SA530B



LZ49850 Handle strip, LZ10ITP00 Long Life odor filter (replacement), LZ11ITD11 Long Life recirculation kit external, LZ11IXB16 Clean Air Plus odor filter (replacement), LZ11IXC16 Clean Air Plus recirc. kit external, LZ45610 Standard odor filter (replacement), LZ45650 Standard recirculation kit, LZ46800 CleanAir Recirculation Kit, LZ46810 CleanAir active carbon filter, LZ46830 CleanAir Recirculation Kit, LZ49200 Installation kit for 90cm wide wall unit, LZ49520 Handle strip white, LZ49560 Handle strip black, LZ49600 Lowering frame

The powerful telescopic cooker hood practically disappears into the upper cabinet.

- ✓ LED light: Optimal visibility and atmosphere when cooking.
- ✓ Pleasantly quiet - motor.
- ✓ Intensive setting with automatic after revert setting
- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.

Typology:Pull-out
Length electrical supply cord: 175.0 cm
Min. required niche size for installation (HxWxD): 385mm x 524.0mm x 290mm mm
Net weight: 12.6 kg
Type of control: Electronic
Maximum output air extraction: 408 m³/h
Boost position output recirculating: 496 m³/h
Maximum output recirculating air: 358 m³/h
Boost position air extraction: 758 m³/h
Number of lights: 2
Noise level: 54 dB(A) re 1 pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable aluminium
Odour filter: No
Air circulation: Convertible
Optional accessories: LZ49850, LZ10ITP00, LZ11ITD11, LZ11IXB16, LZ11IXC16, LZ45610, LZ45650, LZ46800, LZ46810, LZ46830, LZ49200, LZ49520, LZ49560, LZ49600
Type of lamps used: LED
Total power of the lamps: 6 W
Grease filter type: Multilayer cassette
Connection Rating: 146 W
Fuse protection: 10 A
Voltage: 220-240 V
Plug type: GB plug
Type: Built-in into the cabinet
Material body: zinc plated
Plug type: GB plug
Dimensions of the product, with chimney (if exists) (in): x x
Dimensions of the packed product: 15.55 x 37.00 x 18.70
Net weight: 28.000 lbs
Gross weight: 34.000 lbs
Motor location: Integrated motor in hood body
No-return airflow flap: Yes
Length electrical supply cord: 175.0 cm
Dimensions of the product, with chimney (if exists): .. 426 x 898.0 x 290.0 mm
Dimensions of the packed product (HxWxD): ... 395 x 940 x 475 mm
Net weight: 12.6 kg
Gross weight: 15.5 kg
Delay Shut off modes: 10M min



iQ300, telescopic cooker hood, 90 cm, Silver metallic LI97SA530B

Design

- Telescopic design
- silver metallic colour
- Push button controls

Key Functions

- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 407 m³/h
- Intensive 758 m³/h
- Maximum blower performance: 758 m³/h (freeblowing)
- 3 x power levels plus intensive setting


Comfort

- 2 x LED 3W
- Metal grease filter, dishwasher safe
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- Efficient BLDC-technology
- Noise min./max. Normal Level: 42/54 dB

Technical information


- Dimensions of the product, with chimney (if exists) (HxWxD mm): 426 x 898 x 290
- Cutout Dimensions (HxWxD): 38.5 cm x 52.4 cm x 29 cm
- Suitable for ducted and re-circulating operation only
- For installation in a special wall cupboard
- Length electrical supply cord: 175 cm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)

iQ300, telescopic cooker hood, 90 cm, Silver metallic LI97SA530B

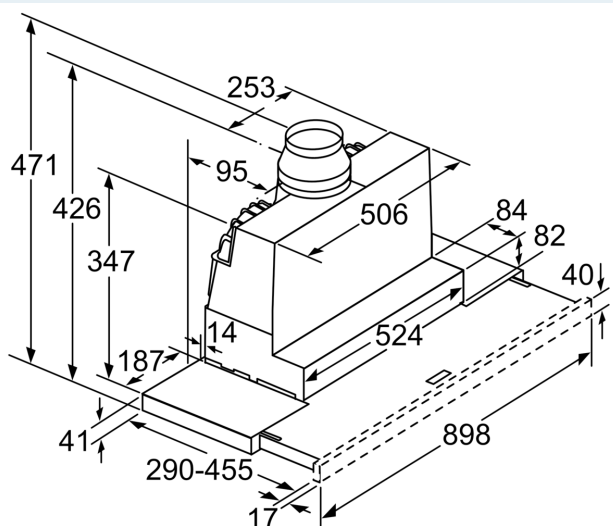


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

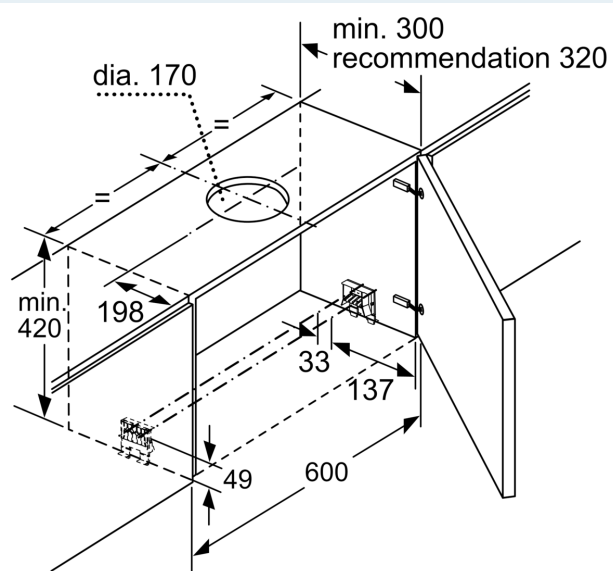


measurements in mm

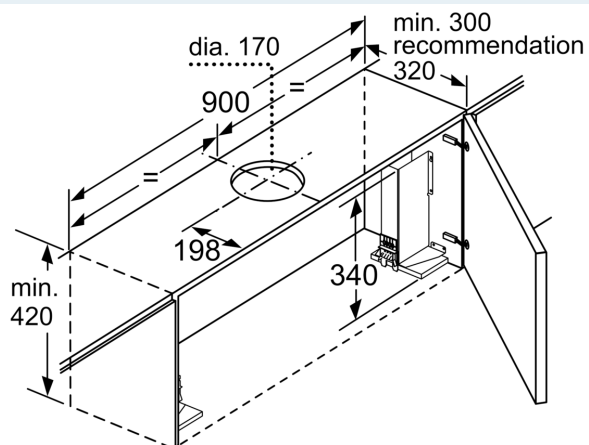

When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.

measurements in mm

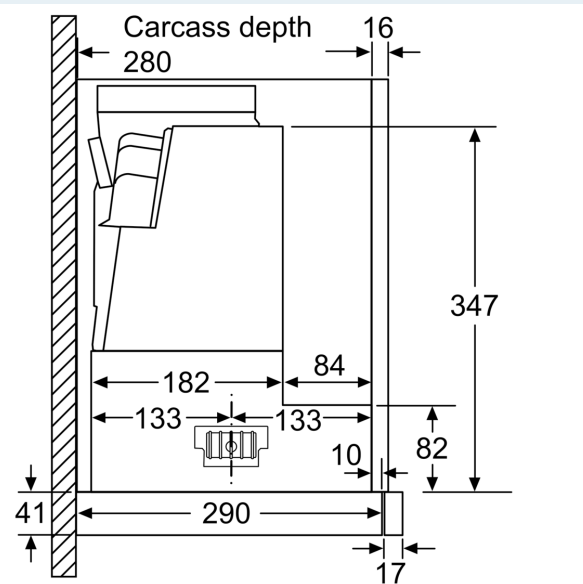

measurements in mm

