

iQ300, telescopic cooker hood, 90 cm, Silver metallic LI97SA530I



The powerful telescopic cooker hood practically disappears into the upper cabinet.

Features

Technical Data

Typology : Pull-out
 Length electrical supply cord : 175 cm
 Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
 Net weight : 13.658 kg
 Type of control : Electronic
 Maximum output air extraction : 408 m³/h
 Boost position output recirculating : 496 m³/h
 Maximum output recirculating air : 358 m³/h
 Boost position air extraction : 758 m³/h
 Number of lights : 2
 Noise level : 54 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10 min
 Optional accessories : LZ10ITP00, LZ11ITD11, LZ11IXB16, LZ11IXC16, LZ46810, LZ45610, LZ45650, LZ46800, LZ46830, LZ49600, LZ49200, LZ49520, LZ49560, LZ49850
 Type of lamps used : LED
 Total power of the lamps : 6 W
 Grease filter type : Multilayer cassette
 Connection Rating : 146 W
 Fuse protection : 16 A
 Voltage : 220-240 V
 Frequency : 50 Hz
 Installation typology : Built-in into the cabinet
 Material body : zinc plated
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 15.74 x 37.00 x 18.89
 Net weight : 30.000 lbs
 Gross weight : 33.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 175 cm
 Dimensions of the product, with chimney (if exists) : 426 x 898.0 x 290.0 mm
 Dimensions of the packed product (HxWxD) : 400 x 940 x 480 mm
 Net weight : 13.658 kg
 Gross weight : 15.1 kg



4 242003 829998

**iQ300, telescopic cooker hood, 90 cm,
Silver metallic
LI97SA530I**

Features

Design

- 90 cm Extractor hood with telescopic canopy
- Appliance colour: silver metallic lacquer
- stainless steel without logo
-
- Push button (3 x power levels plus intensive setting) with LED

Technical information

- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 407 m³/h
- Intensive 758 m³/h
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
- Max. normal use: 54 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
- Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- 3 x power levels plus intensive setting
- Noise min./max. Normal Level: 42/54 dB

Comfort







- Steel filter cover, dishwasher safe
- Automatic 10 minutes after running
- Automatic revert setting, 6 minutes
- Efficient BLDC-technology
- 2 x LED 3W
- Colour Temperature: 3500 K
- Light Intensity: 615 lux
- Energy Efficiency Class: A
- Average Energy Consumption: 38.5 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Dimensions:

- For installation into a 60cm or 90cm wide cupboard
- Telescopic comfort installat.
- Suitable for ducted and re-circulating operation only
- Recirculation kit or clean air kit
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Cutout Dimensions (HxWxD): 38.5 cm x 52.4 cm x 29 cm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Total Connected load: 146 W

iQ300, telescopic cooker hood, 90 cm, Silver metallic LI97SA530I

Dimensioned drawings

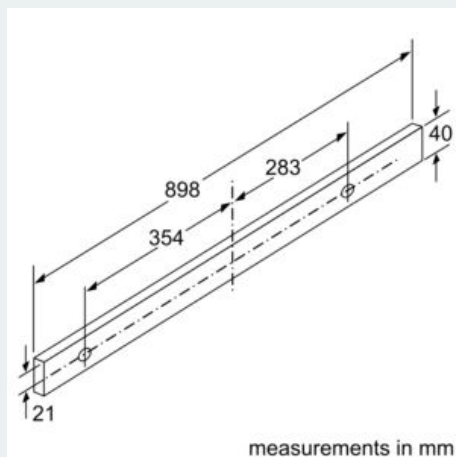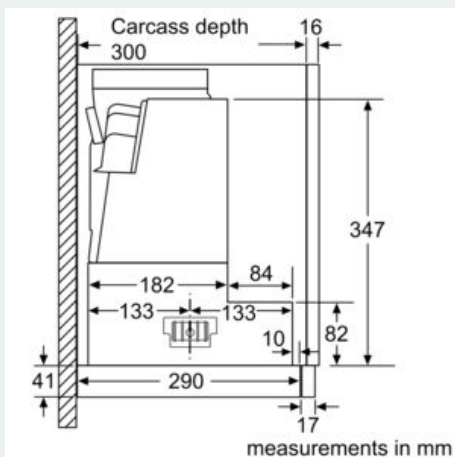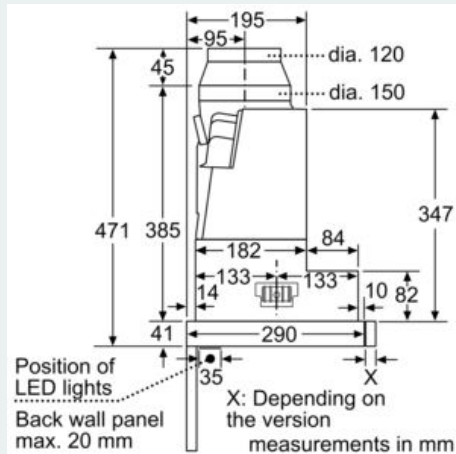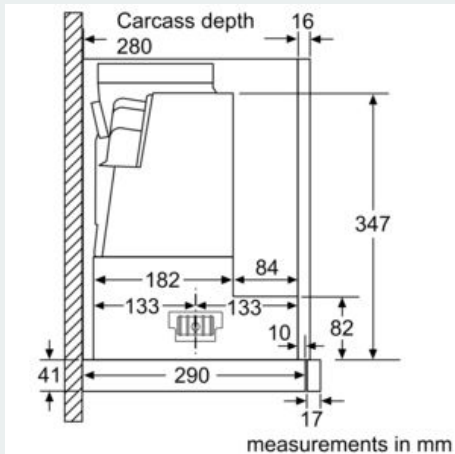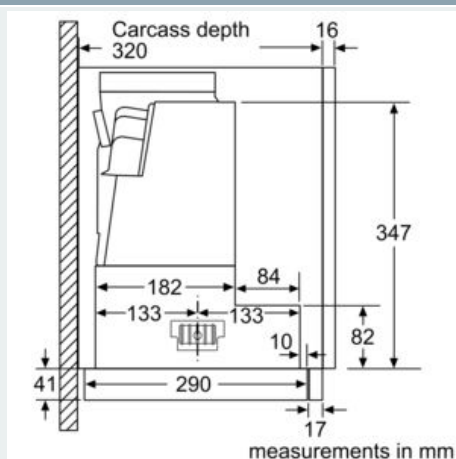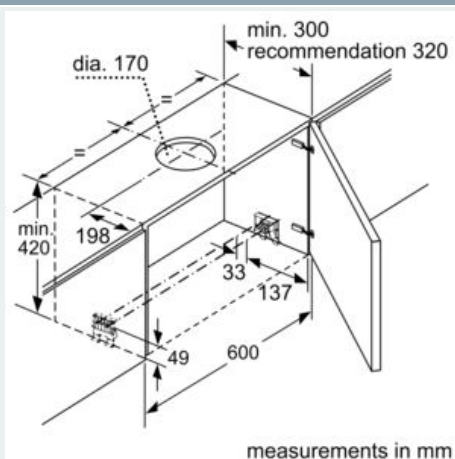

**iQ300, telescopic cooker hood, 90 cm,
Silver metallic
LI97SA530I**

Dimensioned drawings

