

Series 4, telescopic cooker hood, 90 cm, Silver metallic DFS097A51



- DWZ2IT114 Clean Air Standard recirculation kit
- DWZ1IT1D1 Long Life recirculation kit external
- DWZ1IX1B6 Clean Air Plus odor filter (replacement)
- DWZ1IX1C6 Clean Air Plus recirc. kit external
- DWZ2IT1B4 Clean Air Standard odor filter (repl.)
- DSZ4920 Installation kit for 90cm wide wall unit
- DSZ4961 Lowering frame
- DSZ4982 Handle strip white
- DSZ4986 Handle strip black
- DWZ0IT0P0 Long Life odor filter (replacement)
- DSZ4561 Standard odor filter (replacement)
- DSZ4565 Standard recirculation kit

Telescopic cooker hood: barely visible integrated in the wall unit, this ensures a clear kitchen design.

- **Extra silent:** the high-performance hood, with minimal noise.
- **Eco Silence Drive:** the powerful, energy-saving drive for hoods.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.

Typology: Pull-out
 Length electrical supply cord: 175.0 cm
 Min. required niche size for installation (HxWxD): 385mm x 524.0mm x 290mm mm
 Net weight: 13.1 kg
 Type of control:Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 397 m³/h
 Boost position output recirculating: 628 m³/h
 Max. air recirculation: 358 m³/h
 Boost position air extraction: 729 m³/h
 Number of lights: 3
 Noise level:53 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable stainless steel
 Odour filter: No
 Operating Mode:Exhaust / Recirculation (Accessory available separately)
 Optional accessories: DWZ2IT114, DWZ1IT1D1, DWZ1IX1B6, DWZ1IX1C6, DWZ2IT1B4, DSZ4920, DSZ4961, DSZ4982, DSZ4986, DWZ0IT0P0, DSZ4561, DSZ4565
 Type of lamps used: LED
 Total power of the lamps: 6 W
 Grease filter type:Kassette
 Connection rating: 146 W
 Fuse protection:10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Built-in
 Material body: zinc plated
 Plug type: Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in):x x
 Dimensions of the packed product: 15.74 x 37.00 x 19.29
 Net weight: 29.000 lbs
 Gross weight: 35.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: Yes
 Length electrical supply cord: 175.0 cm
 Dimensions of the product, with chimney (if exists):426 x 898.0 x 290.0 mm
 Dimensions of the packed product (HxWxD): 400 x 940 x 490 mm
 Net weight:13.1 kg
 Gross weight: 16.0 kg
 Delay Shut off modes: 10 min



4 242005 232093

Series 4, telescopic cooker hood, 90 cm, Silver metallic DFS097A51

Telescopic cooker hood: barely visible integrated in the wall unit, this ensures a clear kitchen design.

Variant

- 90 cm wide
- 90 cm Slimline hood, silver metallic
- For installation in a special wall cupboard (60 or 90 cm)
- Suitable for ducted or re-circulated extraction
- For recirculated extraction standard recirculation kit or Clean Air Plus recirculation kit (accessory) needed

Design

Comfort

- Push button controls with Electronic display
- Electronic controls via Push button controls with Electronic display
- Electronic controls
- Push button controls (3 speeds plus intensive setting) with Electronic display
- Electronic controls
- Push button controls
- 3 speeds plus intensive setting
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running

Features

- 3 x 1,5 W LED
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Stainless steel filter covers, dishwasher safe
- Metal grease filter, dishwasher safe

Performance

- Extraction rate exhaust air according to EN 61591 max. 729 m³/h
- Noise level according to EN 60704-2-13 at max. normal use exhaust air: Noise, max. speed in normal us: 53 dB dB(A) re 1 pW
- Noise min./max. Normal Level: 41/53 dB
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode: Max. normal use:358m³/h
- Intensive:628m³/h
- Noise level in recirculation mode: Max. normal use:60dB(A) re 1 pW
- Intensive:71 dB(A) re 1 pW
- 2 high-performance blower, Efficient BLDC-technology
- Efficient BLDC-technology

Planning and installation information


- Telescopic comfort installat.
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- with one-way flap
- Electrical cable length 1.75 m
- Stainless steel handle included

Consumption Data


- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 38.1 kWh/year
- Blower Efficiency Class: B*

- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B



Series 4, telescopic cooker hood, 90 cm, Silver metallic
DFS097A51



Depth of
 drawer cabinet
 up to:

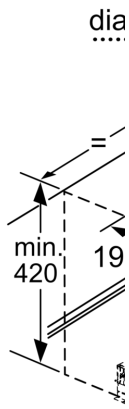

When installed
 a 90 cm wide
 mounting brackets
 kitchen unit



Position of
 LED light
 Back wall
 max. 20 mm

