

Series 4, Telescopic cooker hood, 60 cm, Silver metallic DFS067A51B



DSZ4660	Lowering frame
DSZ4682	Handle strip white
DSZ4686	Handle strip black
DWZ0IT0P0	Long Life odor filter (replacement)
DWZ1IT1D1	Long Life recirculation kit external
DWZ1IX1B6	Clean Air Plus odor filter (replacement)
DWZ1IX1C6	Clean Air Plus recirc. kit external
DWZ2IT1B4	Clean Air Standard odor filter (repl.)
DWZ2IT1I4	Clean Air Standard recirculation kit

Telescopic cooker hood: barely visible integrated in the wall unit, this ensures a clear kitchen design.

- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.
- **LED Illumination:** The energy-saving lighting provides white and good lighting for the hob area.
- **Intensive speed setting:** Removes strong kitchen odours quickly and effectively

Typology: Pull-out
 Length electrical supply cord: 175.0 cm
 Required niche size for installation (HxWxD): ... 385mm x 524.0mm x 290mm mm
 Net weight: 10.2 kg
 Type of control:Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 399 m³/h
 Boost position output recirculating: 628 m³/h
 Max. air recirculation: 358 m³/h
 Boost position air extraction: 728 m³/h
 Number of lights: 2
 Noise level: 53 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable stainless steel
 Odour filter: No
 Operating Mode:Convertible
 Optional accessories: DSZ4660, DSZ4682, DSZ4686, DWZ0IT0P0, DWZ1IT1D1, DWZ1IX1B6, DWZ1IX1C6, DWZ2IT1B4, DWZ2IT1I4
 Type of lamps used: LED
 Total power of the lamps: 4 W
 Grease filter type:Kassette
 Clean filter reminders:No
 Connection rating: 144 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type:GB plug
 Installation typology: Built-in
 Material body: zinc plated
 Plug type:GB plug
 Dimensions of the product, with chimney (if exists) (in):x x
 Dimensions of the packed product: 15.74 x 25.19 x 19.29
 Net weight: 23.000 lbs
 Gross weight: 27.000 lbs
 Motor location: Integrated motor in hood body
 No-return airflow flap: Yes
 Length electrical supply cord: 175.0 cm
 Dimensions of the product, with chimney (if exists): 426 x 598.0 x 290.0 mm
 Dimensions of the packed product (HxWxD): 400 x 640 x 490 mm
 Net weight: 10.2 kg
 Gross weight: 12.3 kg



4 242005 232062

Series 4, Telescopic cooker hood, 60 cm, Silver metallic DFS067A51B

Telescopic cooker hood: barely visible integrated in the wall unit, this ensures a clear kitchen design.

Performance

- Max. extraction rate according to EN 61591: 728 m³/h
- 3 speeds plus intensive setting

Design

- Telescopic Hood silver metallic
- Push button controls

Comfort


- Automatic intensive revert after 6 min
- Automatic run on for 10 min.
- 2 x 1.5W LED
- Stainless steel fliter covers, dishwasher safe
- Removable metal grease filter, dishwasher safe
- Efficient BLDC-technology
- with one-way flap
- Energy Efficiency Class: A

Technical information:

- Dimensions of the product, with chimney (if exists) (HxWxD mm): 426 x 598 x 290
- Required niche size for installation (HxWxD mm): 385 x 524 x 290
- Suitable for ducted or recirculating operation
- For recirculated extraction standard recirculation kit or Clean AirPlus recirculation kit (accessory) needed
- Install into a 60cm wide wall cupboard
- Telescopic comfort installat.
- Voltage: 220 - 240 V
- "Please reference the built-in dimensions provided in the installation drawing"
- Power rating: 144 W
- Electrical cable lenght 1.75 m


* In accordance with the EU-Regulation No 65/2014

Series 4, Telescopic cooker hood, 60 cm, Silver metallic
DFS067A51B

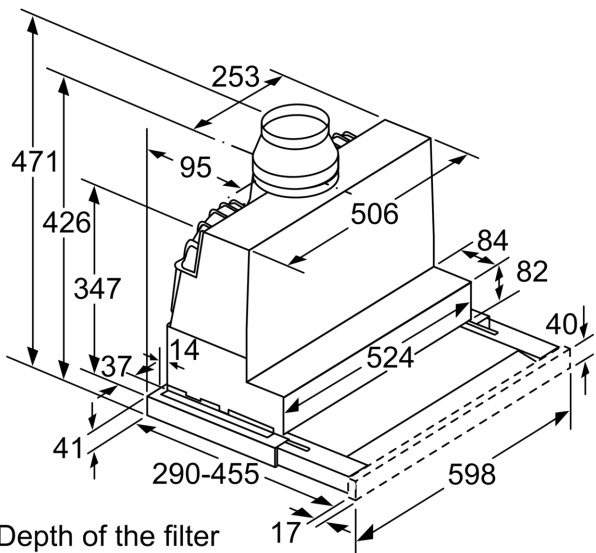


Depth of the filter drawer can be adjusted by up to 29 mm


measurements in mm

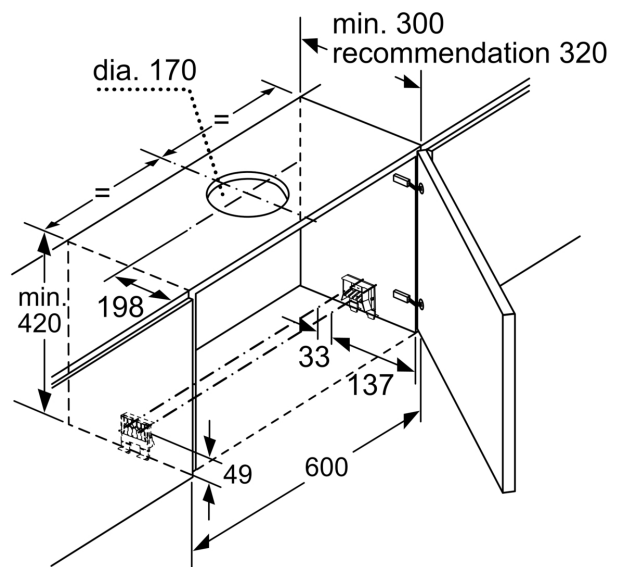

measurements in mm

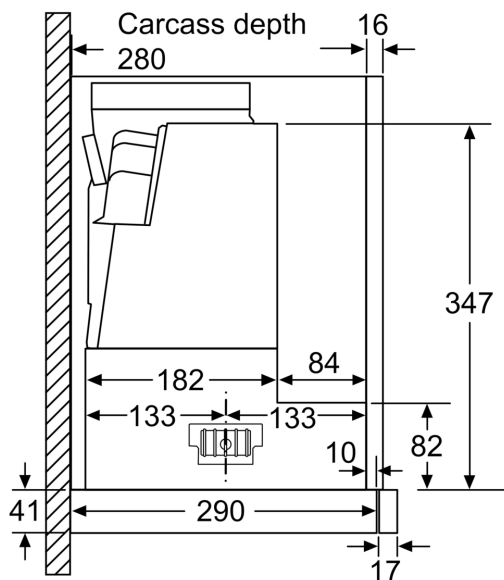

measurements in mm

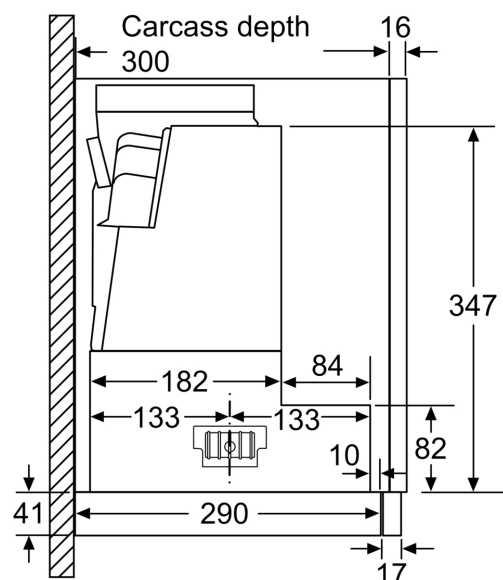

measurements in mm

