

Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB97CM50B



DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- **Extra silent:** the high-performance hood, with minimal noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.
- **TouchSelect control:** Quickly select hood settings via touch.

Color chimney: Stainless steel
 Typology: Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 582-908/568-1018 mm
 Height of product, without chimney: 46 mm
 Net weight: 17.4 kg
 Type of control: Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 440 m³/h
 Boost position output recirculating: 442 m³/h
 Max. air recirculation: 343 m³/h
 Boost position air extraction: 722 m³/h
 Number of lights: 3
 Noise level: 55 dB(A) re 1pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 Odour filter: No
 Operating Mode: Convertible
 Optional accessories: DHZ1223, DHZ1233, DWZ0XX0J5, DWZ1CX1I6, DWZ2CB1I4, DWZ2CX5C6, DWZ2FX5D1, DZZ0XX0P0, DZZ1XX1B6, DZZ2CB1B4
 Type of lamps used: LED
 Grease filter type: Kassette
 Clean filter reminders: No
 Connection rating: 145 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology: Wall-mounted
 Material body: Stainless steel
 Plug type: GB plug
 Dimensions of the product, with chimney (if exists) (in): x x
 Dimensions of the packed product: 23.03 x 25.59 x 38.18
 Net weight: 38.000 lbs
 Gross weight: 53.000 lbs
 Motor location: Integrated motor in hood chimney
 No-return airflow flap: Yes
 Length electrical supply cord: 130.0 cm
 Dimensions of the product, with chimney (if exists): 614-1064 x 898.0 x 500.0 mm
 Dimensions of the packed product (HxWxD): 585 x 650 x 970 mm
 Net weight: 17.4 kg
 Gross weight: 24.1 kg



4 242005 108367

Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB97CM50B

- Voltage: 220 - 240 V

* In accordance with the EU-Regulation No 65/2014

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

Design

- Wall mounted hood
- Box brand design
- 90 cm wide
- 90 cm Chimney hood, Stainless Steel
- TouchControl with Electronic display

Key Functions

- 3 speeds plus intensive setting
- Max. extraction rate according to EN 61591: 722 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
 - Intensive: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Extraction rate in recirculation mode:
 - Max. normal use: 373 m³/h
 - Intensive: 522 m³/h
- Noise levels in recirculation mode:
 - Max. normal use: 66 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
 - Intensive: 73 dB(A) re 1 pW (60 dB(A) re 20 µPa sound pressure)

Comfort:


- Automatic intensive revert after 6 min
- Easy to clean yes
- Efficient BLDC-technology
- 3 x 1.5W LED
- Light Intensity: 359 lux
- Colour Temperature: 3500 K
- Removable metal grease filter, dishwasher safe
- with one-way flap
- Energy Efficiency Class: A+
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Technical information:


- Suitable for ducted or recirculating operation
- Recirc. kit or clean air kit
- Wall fixing system
- Dimensions recirculating with CleanAir module (HxWxD mm):
 - 689 x 898 x 500 - mounting with outer chimney
 - 795-1139 x 898 x 500 - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD mm): 614-954 x 898 x 500
- Dimensions recirculating (HxWxD mm): 614-1064 x 898 x 500
- Electrical connection rating: 145 W
- Electrical cable length 1.3 m

**Series 6, Wall-mounted cooker hood,
90 cm, Stainless steel
DWB97CM50B**


measurements in mm

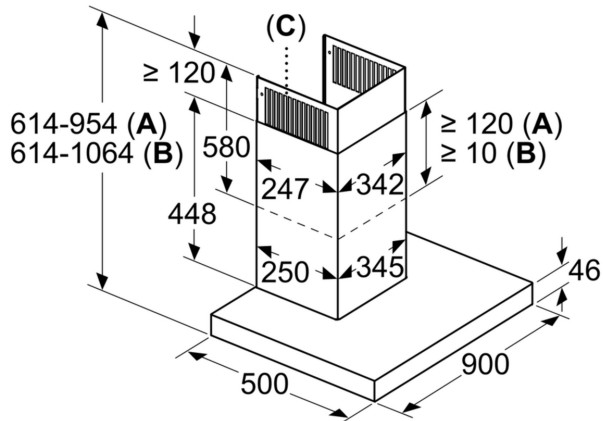

- A:** Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

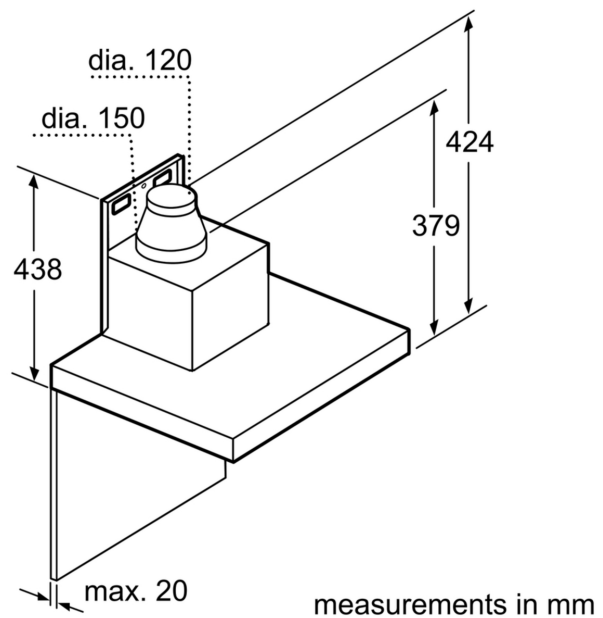


Measurements in mm

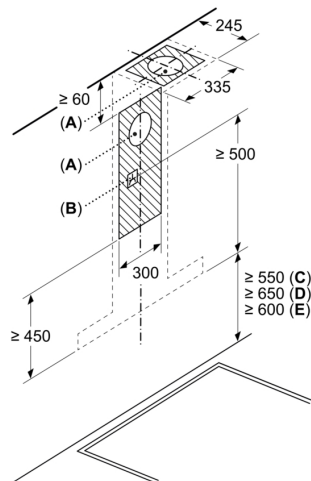

A: Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm

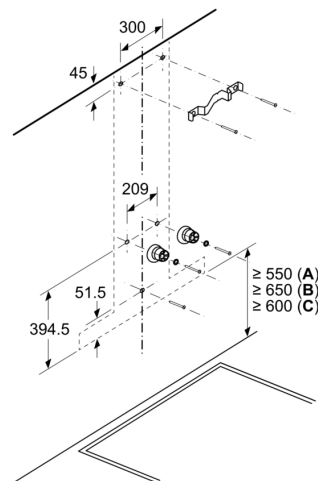

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand