

Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB98JQ50B



DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **DirectSelect Control:** direct selection of desired settings and light.
- **Extra silent:** the high-performance hood, with minimal noise.
- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	582-908/568-1018 mm
Height of product, without chimney:	46 mm
Net weight:	19.1 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Max. air extraction:	430 m³/h
Boost position output recirculating:	457 m³/h
Max. air recirculation:	353 m³/h
Boost position air extraction:	844 m³/h
Number of lights:	3
Noise level:	55 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable stainless steel
Odour filter:	No
Operating Mode:	Convertible
Optional accessories: DHZ1223, DHZ1233, DWZ0XX0J5, DWZ1CX1I6, DWZ2CB1I4, DWZ2CX5C6, DWZ2FX5D1, DZZ0XX0P0, DZZ1XX1B6, DZZ2CB1B4	
Type of lamps used:	LED
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection rating:	165 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted
Material body:	Stainless steel
Plug type:	GB plug
Dimensions of the product, with chimney (if exists) (in):	x x
Dimensions of the packed product:	23.03 x 25.59 x 38.18
Net weight:	42.000 lbs
Gross weight:	56.000 lbs
Motor location:	Integrated motor in hood chimney
No-return airflow flap:	No
Length electrical supply cord:	130.0 cm
Dimensions of the product, with chimney (if exists):	614-1064 x 898.0 x 500.0 mm
Dimensions of the packed product (HxWxD):	585 x 650 x 970 mm
Net weight:	19.1 kg
Gross weight:	25.6 kg



Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB98JQ50B

The wall-mounted chimney hood: Mount it on the wall for complete freedom in your kitchen planning

- Energy Efficiency Class: A+
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 55 dB*

Variant:

Design

Technical information:

Performance

Key Functions

Environment and safety:

Comfort:

Measures:

Technical information:

- 90 cm Wall Hood Hood, Silver metallic
- 90 cm wide
- 90 cm Chimney hood, Stainless Steel
- Suitable for ducted or recirculating operation
- Wall mounted hood
- TouchControl
- electronic controls
- Automatic intensive revert after 6 min
- Automatic run on for 10 min.
- Easy to clean yes
- air quality sensor 1.1
- Dimmer function
- softLight
- 3 x 1.5W LED
- Light Intensity: 389 lux
- Colour Temperature: 3500 K
- Saturation indicator for metal and charcoal filter
- Removable metal grease filter, dishwasher safe
- Max. extraction rate according to EN 61591: 844 m³/h
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 430 m³/h
 - Intensive 844 m³/h
- 3 removable metal grease filters
- Dimensions recirculating with CleanAir module (HxWxD mm):
 - 689 x 898 x 500 - mounting with outer chimney
 - 795-1139 x 898 x 500 - mounting with telescopic chimney
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD mm): 614-954 x 898 x 500
- Dimensions recirculating (HxWxD mm): 614-1064 x 898 x 500

- Electrical cable length 1.3 m
- Voltage: 220 - 240 V
- Recirc. kit or clean air kit
- Wall fixing system
- TouchControl for extractor speeds and light
- electronic controls via TouchControl with lightline
- TouchControl
- 3 fan speeds setting plus 2 intensive
- Efficient BLDC-technology
- removable metal grease filters
- Extraction rate according to EN 61591 max. 844 m³/h
- Additional noise insulation
- Max. noise level according to EN 60704-3 and EN 60704-2-13: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 55 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
 - Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 844 m³/h
- Electrical connection rating: 165 W
- 90 cm Wall-mounted hood, Stainless steel
- 90 cm Wall-mounted Hood, Flat design with black glass canopy
- Stainless Steel with glass canopy
- 3 x LM3-01_LED_1,5W
- Automatic run on for 1-9 min

Design


Performance

Optional accessories


* In accordance with the EU-Regulation No 65/2014

**Series 6, Wall-mounted cooker hood,
90 cm, Stainless steel
DWB98JQ50B**


measurements in mm

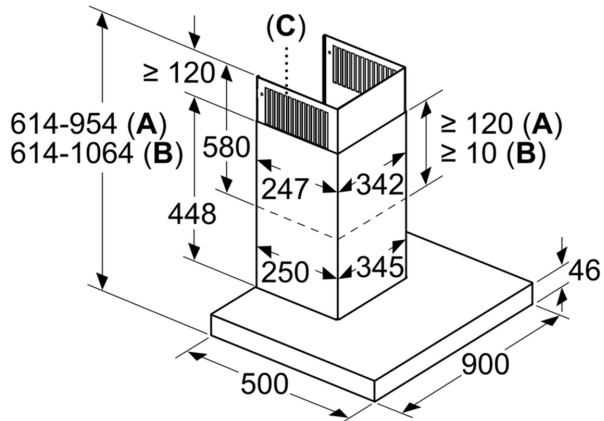

- A:** Air extraction
B: Air recirculation
C: Air outlet – slots for exhaust air to be mounted facing down

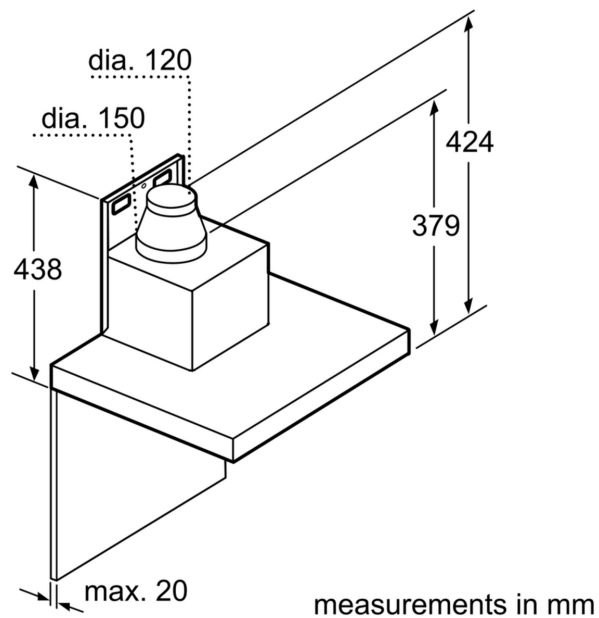


Measurements in mm

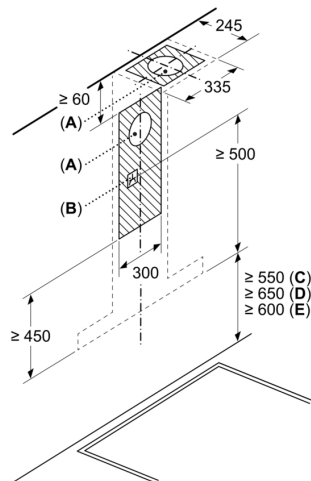

- A:** Exhaust air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm

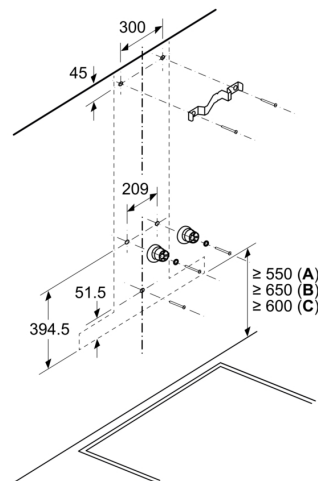

- A:** Electric
- B:** Gas - from upper edge of pan support
- C:** Electric - for Australia and New Zealand