

Series 8, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK91LT60



- **EcoSilence Drive:** the powerful, energy-saving drive for hoods.
- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **Cooktop-based Hood Control:** convenient operation of the hood via your hob.
- **DirectSelect Control:** direct selection of desired settings and light.
- **Favourite Button:** customize your hood settings for a unique, personalized cooking experience.

DWZ0BX6K1	Chimney extension 1000 mm
DWZ0BX6L1	Chimney extension 1500 mm
DWZ1BK1B6	Clean Air Plus odor filter (replacement)
DWZ1BK1I6	Clean Air Plus recirculation kit
DWZ1BK1P1	Long Life odor filter (replacement)
DWZ1BK1R1	Long Life recirculation kit (chimless)
DWZ1BK1S1	Long Life recirculation kit
DWZ1BK1V6	Clean Air Plus recirc. kit (chimless)
HEZG9AS00S	Adapter

Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	420-663/457-750 mm
Height of product, without chimney:	450 mm
Net weight:	25.6 kg
Type of control:	Electronic
Number of speed settings:	3-stage + 2 intensive
Max. air extraction:	441 m³/h
Boost position output recirculating:	944 m³/h
Max. air recirculation:	437 m³/h
Boost position air extraction:	1007 m³/h
Number of lights:	2
Noise level:	51 dB(A) re 1pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable stainless steel
Odour filter:	No
Operating Mode:	Convertible
Optional accessories:	DWZ0BX6K1, DWZ0BX6L1, DWZ1BK1B6, DWZ1BK1I6, DWZ1BK1P1, DWZ1BK1R1, DWZ1BK1S1, DWZ1BK1V6, HEZG9AS00S
Grease filter type:	Kassette
Clean filter reminders:	Yes
Connection rating:	250 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	Gardy plug w/ earthing
Installation typology:	Wall-mounted
Material body:	Glass, Lacquered
Plug type:	Gardy plug w/ earthing
Dimensions of the product, with chimney (if exists) (in):	...x x
Dimensions of the packed product:	30.31 x 28.74 x 48.42
Net weight:	56.000 lbs
Gross weight:	82.000 lbs
Motor location:	Integrated motor in hood body
No-return airflow flap:	Yes
Length electrical supply cord:	130.0 cm
Dimensions of the product, with chimney (if exists):	892-1185 x 890.0 x 447.0 mm
Dimensions of the packed product (HxWxD):	... 770 x 730 x 1230 mm
Net weight:	25.6 kg
Gross weight:	37.0 kg




4 242005 307401

Series 8, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK91LT60


- Inclined glass brand design
- clear glass black printed
- Suitable for ducted or recirculating operation
- In recirculation operation chimless use possible
- Efficient BLDC-technology
- Colour Temperature: 3500 K
- Light Intensity: 422 lux
- 3 fan speeds setting plus 2 intensive
- Saturation indicator for metal and charcoal filter
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Easy to clean yes
- Energy Efficiency Class: A+
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Electrical connection rating: 250 W
- Voltage: 220 - 240 V
- Dimensions exhaust air (HxWxD mm): 855-1098 x 890 x 447
- Dimensions recirculating (HxWxD mm): 892-1185 x 890 x 447
- Electrical cable length 1.3 m
- with one-way flap

**Series 8, Wall-mounted cooker hood,
90 cm, clear glass black printed
DWK91LT60**


Measurements in mm
Appliance in exhaust air mode

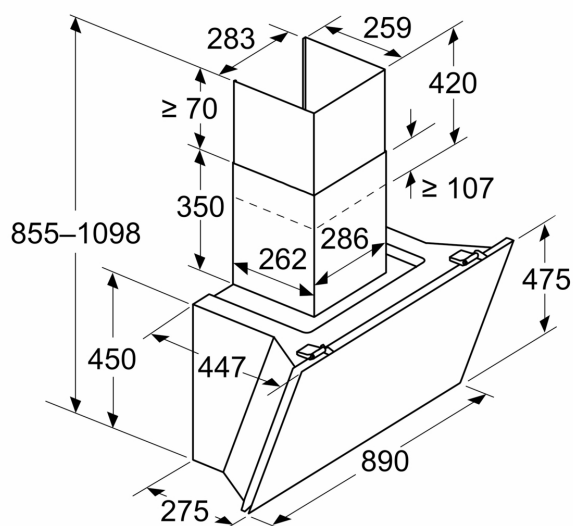

Measurements in mm
Appliance in circulated air mode

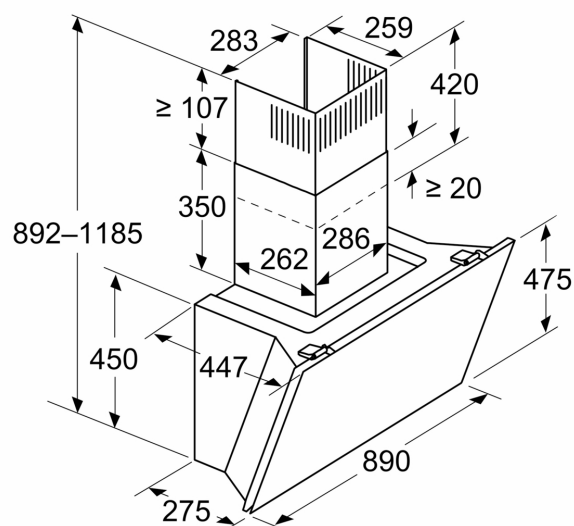


Measurements in mm
Appliance in circulated air mode without duct

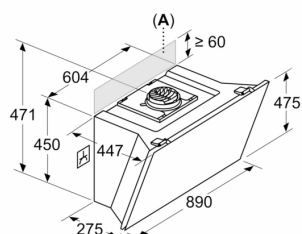

Socket can be fitted to the side of or above the appliance


A: Socket only outside the marked area

Measurements in mm

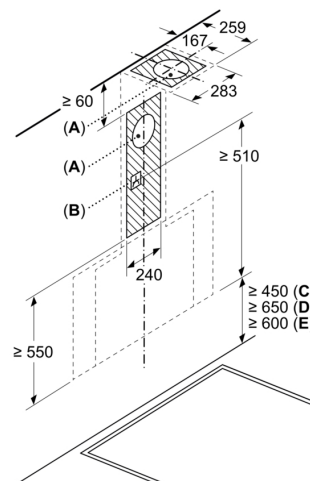

A: Exhaust-air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm
Wall installation with chimney

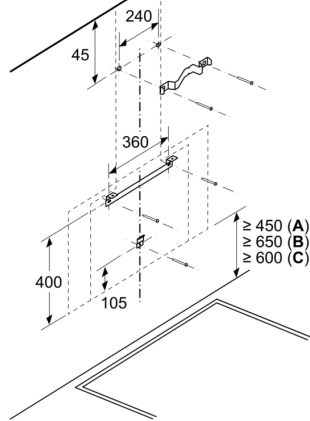


A: Electric

B: Gas - from upper edge of pan support


C: Electric - for Australia and New Zealand

Measurements in mm

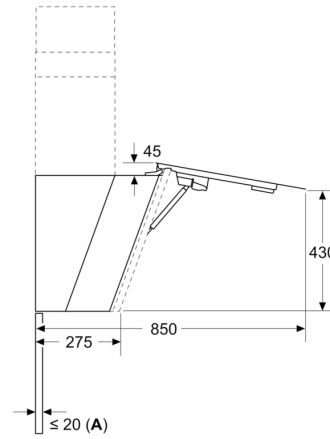

A: Max. back wall thickness

Measurements in mm

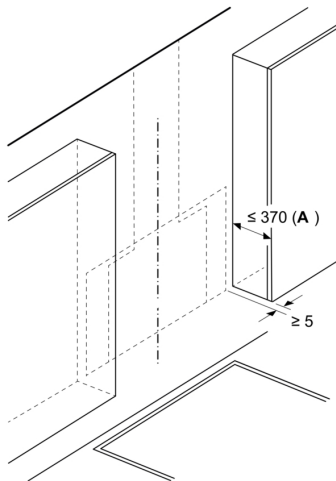

A: Max. depth of side upper cabinets (incl. door) due to installation of glass plate

Appliance must be installed before upper cabinets, if these are deeper than 370 mm