

**Series 6, Built-in fridge-freezer with freezer at bottom, 177.2 x 55.8 cm, flat hinge  
KIS87AF30T**



KSZ10020 Bottle Rack

**A premium bottom freezer refrigerator with Vitafresh plus to ensure your vegetables and fruits last longer**

- **LED lighting:** keep your groceries in perfect view.
- **VarioZone:** more flexibility due to variable-use glass shelves and drawers in the freezer compartment
- **Big Box drawer:** for stacking storage containers or for large frozen food items.
- **Easy Access Shelf:** pull-out glass shelf gives you better access to the contents of your fridge.
- **Low Frost:** defrost less often thanks to lower ice formation - saves work and is energy-efficient.

Built-in / Free-standing:	Built-in
Number of compressors:	1
Number of independent cooling systems:	2
Width of the appliance:	558 mm
Height:	1772 mm
Depth of the product:	545 mm
Net weight:	71.6 kg
Min. required niche size for installation (HxWxD):	1775.0 x 560 x 550 mm
Door panel options:	Not possible
Door hinge:	Right reversible
Number of Adjustable Shelves in fridge compartment:	4
Shelves for Bottles:	No
Frost free system:	No
Interior ventilator:	Yes
Reversible Door Hinge:	Yes
Length electrical supply cord:	230.0 cm
Noise level:	38 dB(A) re 1 pW
Multi-Flow Air Tower:	No
Fast cooling switch:	Yes
Fast freezing switch:	No
Temperature Controlled Drawer:	No
Humidity Control Drawer:	Yes
Number of Door Bins - Refrigerator:	4
Door bin adjustability - Refrigerator:	Yes
Tilt-out door bins in fridge:	Yes
Gallon Storage:	Yes
Number of Gallon storage:	1
Motorized Shelf:	No
Material of the shelves:	Safety glass
Door opened indicator freezer:	No
Automatic motor-driven ice-maker:	No
Connection rating:	90 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Freezing capacity:	5 kg
Storage Period in Event of Power Failure (h):	26 h
Door panel options:	Not possible
Noise level:	38 dB(A) re 1 pW
Energy Star Qualified:	No
Plug type:	GB plug
Required cutout/niche size for installation (in):	x
Dimensions of the packed product:	72.44 x 24.40 x 25.19
Net weight:	158.000 lbs
Gross weight:	170.000 lbs



4 242002 809373

## **Series 6, Built-in fridge-freezer with freezer at bottom, 177.2 x 55.8 cm, flat hinge KIS87AF30T**

### **A premium bottom freezer refrigerator with Vitafresh plus to ensure your vegetables and fruits last longer**

---

#### **GENERAL INFORMATION**

- Energy Efficiency Rating: 2 Ticks
- Annual Energy Consumption: 325 kWh/year
- Total net capacity: 261 Litres
- Net Fridge Capacity: 208 Litres
- Net Freezer Capacity: 53 Litres

#### **Design and Styling**

- Interior LED Light: Brighter lighting to help you to see the fridge interior more clearly

#### **FRESHNESS SYSTEM**

- HydroFresh Crisper with humidity control - keeps fruit and vegetables up to 2 x longer fresh!
- SuperCool Function: New food can be quickly cooled down to 2 degree celsius to prevent increase in internal temperature
- SuperFreezing Function: New food can be frozen quickly and not affect the temperature of "old" food

#### **Convenience & Safety**

- Holiday Mode: Switch to energy saving mode when you are away for holiday
- Active Warning System by Temperature Increase, Failure Memory Function
- Acoustic warning system

#### **Fridge Compartment**

- 1 Vitafresh plus drawer keeps fruits and vegetables fresh for up to 2 times longer.
- 5 safety glass shelves (4 height adjustable), of which Bottom shelf, Extendable glass shelf
- 5 door bins, there of 1x dairy compartment

#### **Freezer Compartment**

- Freezing capacity: 5 kg/24 h
- 2 transparent freezer drawers, include 1 big box
- Calendar Frozen Food




#### **APPLIANCE DIMENSION**

- Dimensions ( H x W x D): 177.2 cm x 55.8 cm x 54.5 cm
- Niche Dimension H X W x D: 177.5 cm x 56 cm x 55 cm

#### **COMFORT & SAFETY**


- Door right hinged, Reversible
- Voltage 220 - 240 V

**Series 6, Built-in fridge-freezer with  
freezer at bottom, 177.2 x 55.8 cm,  
flat hinge  
KIS87AF30T**

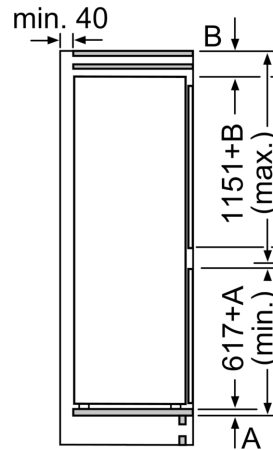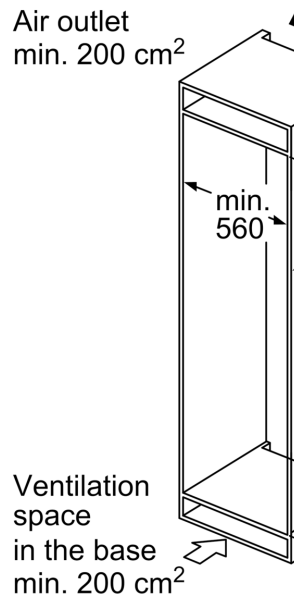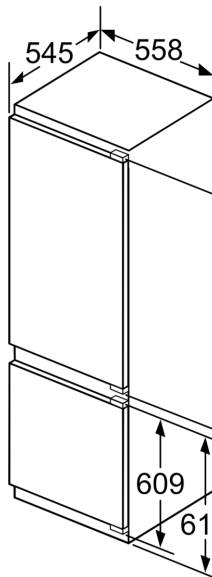

The specified unit doc  
are valid for a door ga

measurements in mm  
Recommended gap di



The gap dimensions r  
in the table must be a  
to ensure that applian  
collide with anything v  
and to avoid causing c