


Series 6, Gas hob, 60 cm, Stainless steel PCC6A5B90



HEZ211310	Simmer cap
HEZ298105	Simmer plate
HEZ298107	Wok ring
HEZ298115	Small pot support
HEZ9SE040	4 pieces Set
HEZ9SE060	6 pieces Set

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input:Gas
 Total number of positions that can be used at the same time: 3
 Type of control setting devices: sword knobs
 Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm
 Width of the appliance: 582 mm
 Dimensions: 53x582x520 mm
 Dimensions of the packed product (HxWxD): 141 x 651 x 578 mm
 Net weight: 10.8 kg
 Gross weight: 11.7 kg
 Residual heat indicator: without
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100.0 cm
 Knob Material: Plastic
 Sealed Burners: No
 Type of pan support: Elongated cast iron pan support
 Power of 2nd heating element (kW): 4 kW
 Power of 5th heating element (kW): 3 kW
 Connection rating: 1 W
 Gas connection rating: 8000 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Energy input: Gas
 Gas type: Nat gas H/E/(L) 20 (25) mbar
 Alternative gas type: Liquid gas G30,31 28-30/37mbar
 Plug type: no plug
 Appliance Dimensions (h x w x d) (in): x x
 Dimensions of the packed product: 5.55 x 22.75 x 25.62
 Net weight: 24.000 lbs
 Gross weight: 26.000 lbs
 Total number of positions that can be used at the same time: 3
 Length electrical supply cord: 100.0 cm
 Required niche size for installation (HxWxD): 45 x 560-562 x 480-492 mm
 Dimensions: 53x582x520 mm
 Dimensions of the packed product (HxWxD): 141 x 651 x 578 mm
 Net weight: 10.8 kg
 Gross weight: 11.7 kg

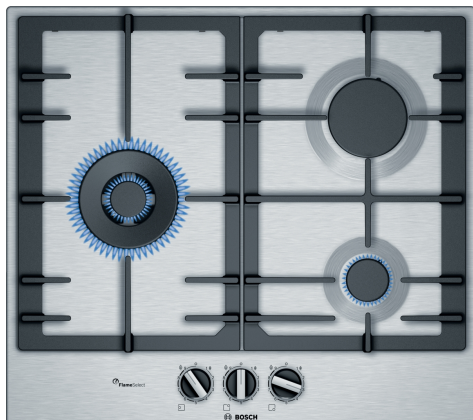

4 242002 802688

Series 6, Gas hob, 60 cm, Stainless steel

PCC6A5B90

Design

- Cast iron pan supports

Usage convenience

- step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- sword knobs: easily access knobs in front with strong grip for effortless turning.
- Control knob with electric ignition: just push and turn the knob to ignite the flame.

Burners and power

- 3 gas burners

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 8 KW

Series 6, Gas hob, 60 cm, Stainless steel
PCC6A5B90

