

36-Inch Pro Grand® Commercial Depth Dual Fuel Range



Product Features

Innovation

Multi-zone Liberty Induction module provides the ultimate in cooking performance and flexibility with Boost and Heat Shift

MoveMode® feature allows easy transfer of settings without having to reset power levels when moving a pot across the cooktop

Powerful 22,000 BTU (NG) burner (front right) plus 4 ExtraLow® simmer burners for precise simmering

Multi-point Temperature Meat Probe measures the temperature of your dish from three different points for more accurate cooking results

Performance

Superfast 2-hour self-clean mode - fastest in the industry

Patented Pedestal Star® Burner with QuickClean Base® designed for easy surface cleaning and superior heat spread for any size pan

SoftClose® hinges for ultra smooth closing of the oven door

Three Full Access® telescopic racks holds up to 45 pounds, integrated easy grip handle

Third Element Convection offers precise airflow for cooking on multiple levels without flavor transfer

Design

Bold Professional design

Pinhole and panel lighting concepts provide functional and stylish aesthetics

Restaurant style metal knobs

Signature blue indicator lighting


Large oven door window for maximum viewing

Notes: Please refer to installation instructions. Installation instructions are available at www.thermador.com. Specifications are correct at the time of printing. Thermador reserves the right to change product specifications and design at any time, without notice.

1 800 735 4328 | WWW.THERMADOR.COM | 1901 Main Street, Suite 600 Irvine, CA 92614

©2022 BSH HOME APPLIANCES CORPORATION, ALL RIGHTS RESERVED LITHO DATE: 08/2022

36-Inch Pro Grand® Commercial Depth Dual Fuel Range

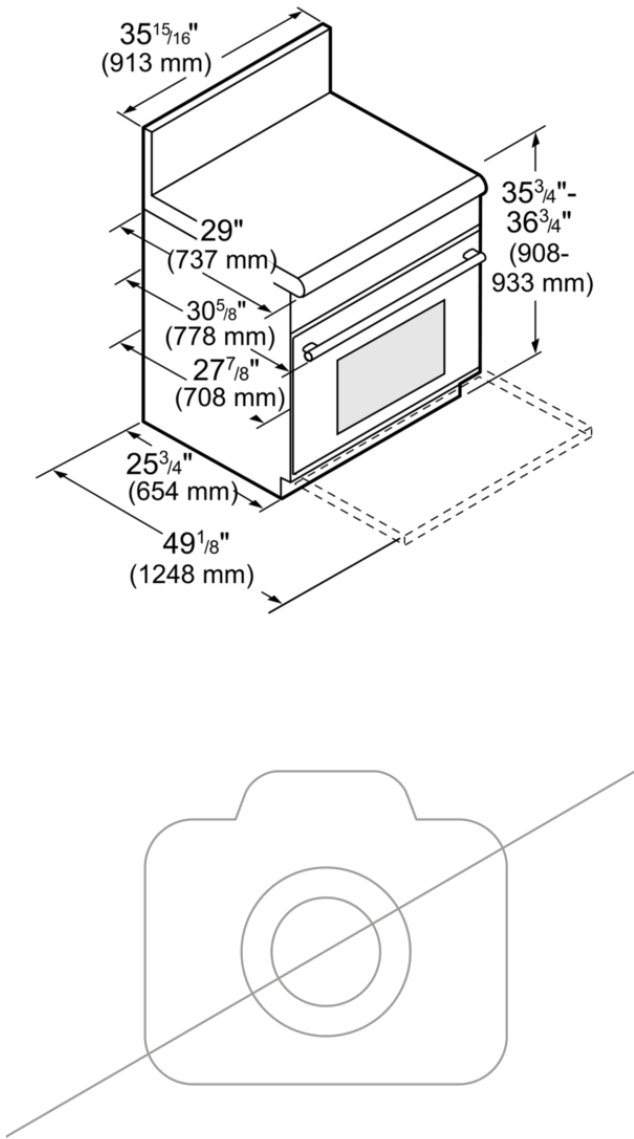

Product Features

Total number of cooktop burners	6
Cooking mode	3rd element convection, Centre-area grill/ broiler, Convection Bake, Convection Broil, Conventional heat, Roasting function, Selfcleaning pyrolytic
Integrated Cleaning system	Self Clean
Oven Control	Electronic
Knob Material	Full metal
Included accessories	1 x nozzle set for liquid gas, 1 x temperature sensor, 1 x telescopic rack, 1 x grill plate, 1 x Broiler pan, 1 x island trim
Sealed Burners	Yes
Number of Double grates	2
Bake Element Wattages primary cavity	2000
Convection Element Wattages primary cavity	2750
Number of gas burners	4
Location of 1st heating element	front left
Power of 1st burner	22000
Location of 2nd heating element	center left
Location of 3rd heating element	back left
Power of 3rd burner (BTU)	15000
Location of 4th heating element	middle back
Location of 5th heating element	back right
Power of 5th burner	12284
Location of 6th heating element	center right
Power of griddle element	3600
Safety device	automatic reignition, Electronic flame control, Overheating protection, Thermostat

Technical Specification

UPC code	825225926412
Alternative gas type	Liquid gas 27,5 mbar (USA)
Total BTU load	70000
Watts	10200
Fuse protection	50
Volts	240/208
Frequency	60
Approval certificates	CSA
Overall appliance dimensions (HxWxD) (in)	36" width slide-in 35 7/8" x 35 15/16" x 27 7/8"
Variable cooker height (in)	1"
AHAM usable cavity size	3
Product packaging dimensions (HxWxD)	49 1/4 x 43 1/2 x 40 3/8
Gross weight	404
	410.000

Notes: Please refer to installation instructions. Installation instructions are available at www.thermador.com. Specifications are correct at the time of printing. Thermador reserves the right to change product specifications and design at any time, without notice.