

# T24UR900RP

## UNDER-COUNTER GLASS DOOR REFRIGERATOR

CUSTOM PANEL-READY – RIGHT HINGED



Also Available:

- T24UR900LP – Left Hinged Custom Panel-Ready
- T24UR920LS – Left Hinged with Professional Series Handle
- T24UR920RS – Right Hinged with Professional Series Handle
- T24UR910LS – Left Hinged with Masterpiece® Series Handle
- T24UR910RS – Right Hinged with Masterpiece® Series Handle

### FEATURES & BENEFITS

- Customizable cooling modes – Fridge, Pantry and Bar
- SoftClose® door hinges for ultra-smooth closing
- Fully adjustable tempered glass shelves
- Door Open Alarm
- LED theater Lighting
- Sabbath Mode
- Touch electronic controls for temperature management

### GENERAL PROPERTIES

|                               |              |
|-------------------------------|--------------|
| Custom Panel-Ready            | Yes          |
| SoftClose® Door               | Yes          |
| Lighting                      | LED Lighting |
| Tempered Glass Shelves        | 4            |
| Door Open Alarm               | Yes          |
| Quick Chill                   | Yes          |
| Touch Electronic Controls     | Yes          |
| STAR-K Certified Sabbath Mode | Yes          |

### CAPACITY

|                          |             |
|--------------------------|-------------|
| Total Capacity (cu. ft.) | 5.1 cu. ft. |
|--------------------------|-------------|

### TEMPERATURE RANGES

|                       |                                                                 |
|-----------------------|-----------------------------------------------------------------|
| Refrigerator          | 33°F (0.5°C) to 58°F (14.5°C)                                   |
| Pre-Set Cooling Modes | Refrigerator 37°F (3°C)<br>Pantry 53°F (12°C)<br>Bar 34°F (1°C) |
| Quick Chill           | Refrigerator 33°F (0.5°C) for approximately 24 hours            |

### TECHNICAL DETAILS

|                         |             |
|-------------------------|-------------|
| Watts (W)               | 150 W       |
| Current (A)             | 15 Amp      |
| Volts (V)               | 115 V       |
| Frequency (Hz)          | 60 Hz       |
| Power Cord Length (in.) | 60"         |
| Plug Type               | 120V 3-Wire |

### DIMENSIONS & WEIGHT

|                                        |                           |
|----------------------------------------|---------------------------|
| Appliance Dimensions (H x W x D) (in.) | 34 1/4" x 23 7/8" x 24"   |
| Required Cutout Size (H x W x D) (in.) | 35" x 24 3/16" x 24 9/16" |
| Net / Gross Weight (lbs.)              | 190 / 205 lbs.            |

### EFFICIENCY

|                           |         |
|---------------------------|---------|
| ENERGY STAR® Qualified    | Yes     |
| Annual Energy Consumption | 274 kWh |

### WARRANTY

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System\*; Parts and Labor

3rd to 6th Year

Limited Warranty for Sealed Refrigeration System\*; Parts Only

7th to 12th Year

\*Height adjustable + 1/2" (13 mm) with legs fully extended

\*\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing


# T24UR900RP

## UNDER-COUNTER GLASS DOOR REFRIGERATOR


CUSTOM PANEL-READY – RIGHT HINGED




### GLASS DOOR REFRIGERATOR PRODUCT DIMENSIONS

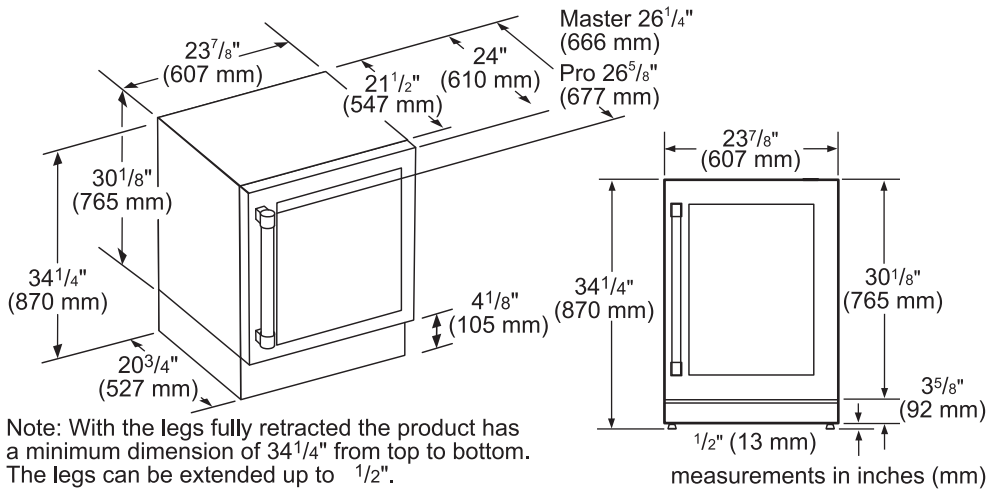


### GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS

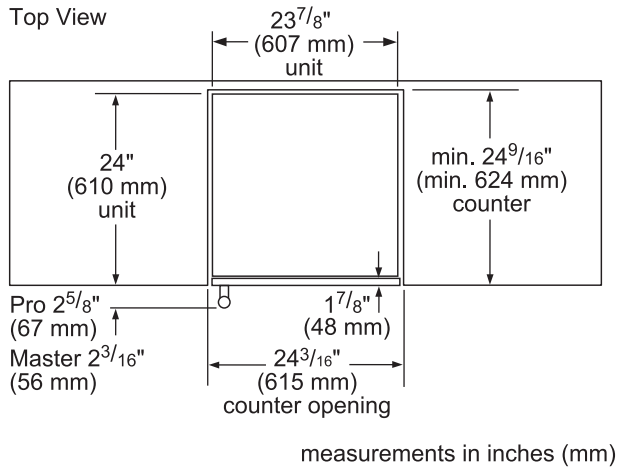

### Frontal view

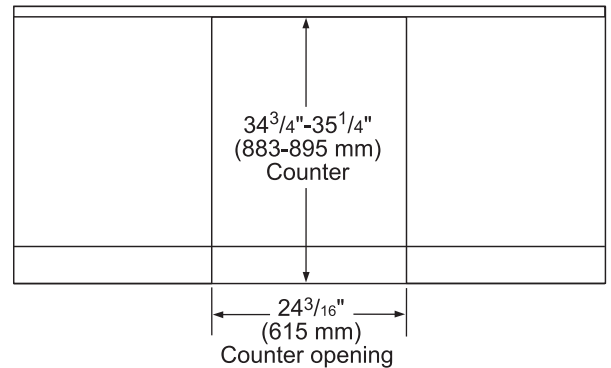

### GLASS DOOR REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION

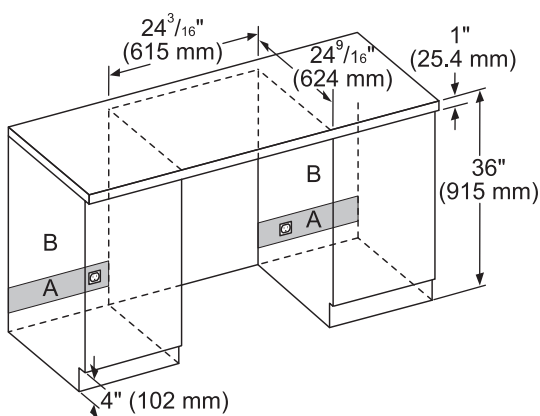

A:  
Recommended area for installation connection - a  $2\frac{1}{2}"$  (63 mm) diameter hole is recommended. Location of power cord at base of the appliance.

B:  
It is recommended that the water connection is placed adjacent to the installation cavity, so that it can be accessed without uninstalling the appliance.

For flush installation, recommend outlet and water connection to be placed to the side of the unit and not directly behind.

measurements in inches (mm)


# T24UR900RP

## UNDER-COUNTER GLASS DOOR REFRIGERATOR


CUSTOM PANEL-READY – RIGHT HINGED



### GLASS DOOR REFRIGERATOR CUTOUT & DOOR SWING DIMENSIONS

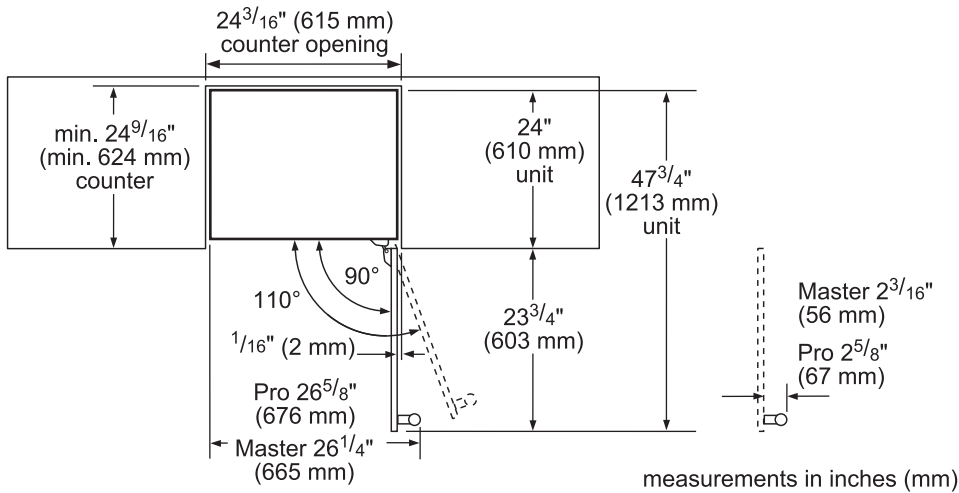

### GLASS DOOR REFRIGERATOR SIDE-BY-SIDE INSTALLATION

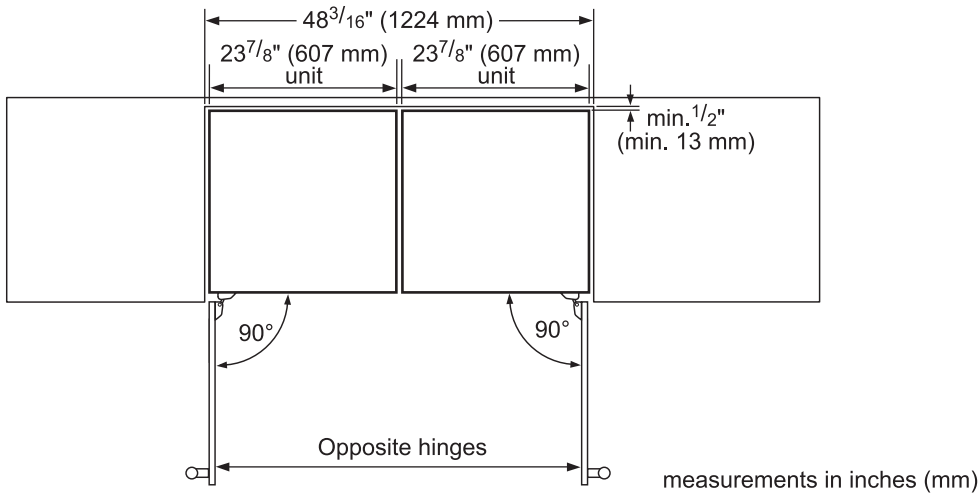

### ACCESSORIES (OPTIONAL)

#### HANDLES

NOTE: Choose one handle for each glass door model, choose 2 handles for each double drawer model.



PR20HNDL20  
20-Inch Professional Series Handle



MS20HNDL20  
20-Inch Masterpiece® Series Handle

**Thermador** 