

**Series 6, Wall-mounted cooker hood,  
90 cm, Stainless steel  
DWB98JQ50B**



**The wall-mounted chimney hood: mount it  
on the wall, giving you complete freedom  
in your kitchen planning.**

- **PerfectAir sensor:** enjoy quieter, odour-free cooking.
- **DirectSelect Control:** direct selection of desired settings and light.
- **Extra silent:** the high-performance hood, with minimal noise.
- **Eco Silence Drive:** the powerful, energy-saving drive for hoods.

DHZ1223	Chimney extension 1000 mm
DHZ1233	Chimney extension 1500 mm
DHZ5345	Standard recirculation kit
DHZ5346	Standard odor filter (replacement)
DWZ0XX0J5	Long Life recirculation kit
DWZ1CX1I6	Clean Air Plus recirculation kit
DWZ2CB1I4	Clean Air Standard recirculation kit
DWZ2CX5C6	Clean Air Plus recirc. kit external
DWZ2FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)
DZZ2CB1B4	Clean Air Standard odor filter (repl.)

Typology: .....Wall-mounted  
 Length electrical supply cord: ..... 130.0 cm  
 Height of the chimney: ..... 582-908/568-1018 mm  
 Height of product, without chimney: ..... 46 mm  
 Net weight: ..... 19.3 kg  
 Type of control: .....Electronic  
 Number of speed settings: .....3-stage + 2 intensive  
 Max. air extraction: .....430 m<sup>3</sup>/h  
 Boost position output recirculating: .....457 m<sup>3</sup>/h  
 Max. air recirculation: ..... 353 m<sup>3</sup>/h  
 Boost position air extraction: ..... 844 m<sup>3</sup>/h  
 Number of lights: ..... 3  
 Noise level: .....55 dB(A) re 1 pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: ..... Washable stainless steel  
 Odour filter: ..... No  
 Operating Mode: .....Exhaust / Recirculation (Accessory available separately)  
 Optional accessories: ..... DHZ1223, DHZ1233, DHZ5345, DHZ5346, DWZ0XX0J5, DWZ1CX1I6, DWZ2CB1I4, DWZ2CX5C6, DWZ2FX5D1, DZZ0XX0P0, DZZ1XX1B6, DZZ2CB1B4  
 Type of lamps used: ..... LED  
 Grease filter type: .....Kassette  
 Connection rating: ..... 165 W  
 Fuse protection: .....10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... GB plug  
 Installation typology: .....Wall-mounted  
 Material body: ..... Stainless steel  
 Plug type: ..... GB plug  
 Dimensions of the product, with chimney (if exists) (in): .....x x x  
 Dimensions of the packed product: ..... 23.03 x 25.59 x 38.18  
 Net weight: .....43.000 lbs  
 Gross weight: ..... 56.000 lbs  
 Motor location: ..... Integrated motor in hood chimney  
 No-return airflow flap: ..... No  
 Length electrical supply cord: ..... 130.0 cm  
 Dimensions of the product, with chimney (if exists): ..... 614-1064 x 898.0 x 500.0 mm  
 Dimensions of the packed product (HxWxD): ..... 585 x 650 x 970 mm  
 Net weight: ..... 19.3 kg  
 Gross weight: ..... 25.6 kg  
 Delay Shut off modes: .....10 min



## **Series 6, Wall-mounted cooker hood, 90 cm, Stainless steel DWB98JQ50B**

**The wall-mounted chimney hood: mount it  
on the wall, giving you complete freedom  
in your kitchen planning.**

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 30.1 kWh/year
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A
- Grease Filtering Efficiency Class: B
- Noise min./max. Normal Level: 46/55 dB

### **Variant**

### **Design**

### **Technical information**

### **Performance**

### **Power:**

### **Environment and safety:**

### **Comfort**

### **Measures:**


### **Technical information**

- Wall Hood Brushed steel
- 90 cm wide
- 90 cm Chimney hood, Brushed steel
- Suitable for ducted or re-circulated extraction
- For recirculated extraction standard recirculation kit or Clean Air Plus recirculation kit (accessory) needed
- Wall mounted hood
- Wall fixing system
- TouchControl
- Electronic controls
- TouchControl with lightline
- 3 speeds plus 2 intensive via TouchControl
- Electronic controls via TouchControl with lightline
- TouchControl (3 speeds plus 2 intensive) with lightline
- 3 speeds plus 2 intensive
- Automatic revert setting, 6 minutes
- Automatic 10 minutes after running
- easy to clean innerframe
- Air quality sensor
- Light dimmer function
- SoftLight
- Efficient BLDC-technology
- 3 x 1,5 W LED
- Light Intensity: 389 lux
- Colour Temperature: 3500 K
- Saturation indicator for grease fliter and odor fliter
- Stainless steel filter covers, dishwasher safe
- Metal grease fliter, dishwasher safe
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 430 m<sup>3</sup>/h Intensive 844 m<sup>3</sup>/h
- Extraction rate exhaust air according to EN 61591 max. 843 m<sup>3</sup>/h
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 430 m<sup>3</sup>/h Intensive 844 m<sup>3</sup>/h
- Extraction rate exhaust air according to EN 61591:

- max. normal use 430 m<sup>3</sup>/h, intensive 844 m<sup>3</sup>/h
- Dimensions recirculating with CleanAir Plus recirculation kit


**Series 6, Wall-mounted cooker hood,  
90 cm, Stainless steel  
DWB98JQ50B**

measurements in mm

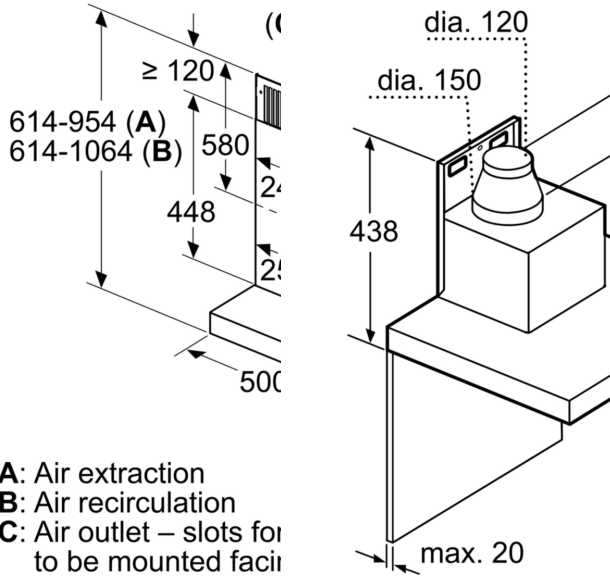


- A:** Air extraction
- B:** Air recirculation
- C:** Air outlet – slots for to be mounted facia

Measurements in mm

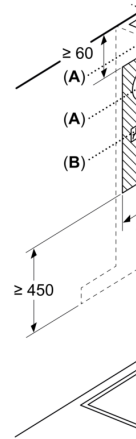

- A:** Exhaust air outlet
- B:** Socket
- C:** Electric
- D:** Gas - from upper part
- E:** Electric - for Austr

Measurements in mm

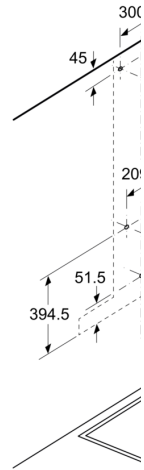

- A:** Electric
- B:** Gas - from upper part
- C:** Electric - for Austr