

## Series 8, Flex induction hob, 90 cm, Black, PXX975DC1E



HEZ32WA00 Wireless food thermometer, HEZ390011 Stainless Steel roaster with glas lid, HEZ390012 Steaming Rack for Stainless Steel roaste, HEZ390090 Wok Set consisting of 3 Items, HEZ390210 System pan diameter 15 cm, HEZ390220 System pan diameter 19 cm, HEZ390230 System pan diameter 21cm, HEZ390512 Teppan Yaki (large), HEZ390522 Griddle Plate, HEZ394301 Connecting strip, HEZ9ES100 Espresso maker 4 cups, HEZ9FE280 Iron pan Ø 18 / 28 cm, HEZ9FF010 Flex Pan, large, HEZ9FF030 Flex Pan set, 3 pcs., HEZ9FF040 Flex Pan set, 4 pcs., HEZ9SE040 4 pieces Set, HEZ9SE060 6 pieces Set, HEZ9TY010 Teppan Yaki, HZ390011 Stainless Steel roaster with glas lid

## The induction hob with PerfectFry: achieve perfect frying results thanks to automatic temperature control.

- **DirectSelect Premium:** spacious and intuitive touch interface.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **PerfectFry:** no more worries about scorching.
- **Comfort Profile:** elegant, appealing design with bevelled front and metal strips on the side.
- **MoveMode:** the automatic setting of cooking levels allows fast boiling on the front, cooking on the middle and simmering on the rear cooking zone.

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Total number of positions that can be used at the same time: ..... 5  
Min. required niche size for installation (HxWxD): ..... 51 x 880-880 x 490-500 mm  
Width of the appliance: ..... 916 mm  
Dimensions: ..... 51 x 916 x 527 mm  
Dimensions of the packed product (HxWxD): ... 126 x 1073 x 603 mm  
Net weight: ..... 18.9 kg  
Gross weight: ..... 22.7 kg  
Residual heat indicator: ..... yes  
Location of control panel: ..... Front  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black, Alu, brushed  
Length electrical supply cord: ..... 110.0 cm  
Sealed Burners: ..... No  
Power Boost: ..... All cooking zones  
Power of 2nd heating element (kW): ..... 3.3 kW  
Power of heating element (kW in boost): ..... [3.7] kW  
Power of 6th heating element (kW in boost): ..... 3.7 kW  
Connection rating: ..... 11100 W  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz  
Energy input: ..... Electric  
Plug type: ..... No plug (electrical connection by electrician)  
Appliance Dimensions (h x w x d) (in): ..... x x  
Dimensions of the packed product: ..... 4.96 x 23.74 x 42.26  
Net weight: ..... 42.000 lbs  
Gross weight: ..... 50.000 lbs  
Total number of positions that can be used at the same time: ..... 5  
Length electrical supply cord: ..... 110.0 cm  
Min. required niche size for installation (HxWxD): ..... 51 x 880-880 x 490-500 mm  
Dimensions: ..... 51 x 916 x 527 mm  
Dimensions of the packed product (HxWxD): ... 126 x 1073 x 603 mm  
Net weight: ..... 18.9 kg  
Gross weight: ..... 22.7 kg



4 242002 861753

## Series 8, Flex induction hob, 90 cm, Black, **PXX975DC1E**

**The induction hob with PerfectFry: achieve perfect frying results thanks to automatic temperature control.**

### **Power and size**

- 5 Induction cooking zones
- 3 Flex Zones
- Cooking zones: 1 x400 mmx240 mm,3.3 KW(max. power3.7 KW)  
Induction or 2 x200 mm, 240 mm,2.2 KW(max. power3.7 KW)
- Induction; 1 x300 mmx240 mm,2.6 KW(max. power3.7 KW)
- Induction; 1 x400 mmx240 mm,3.3 KW(max. power3.7 KW)
- Induction or 2 x200 mm, 240 mm,2.2 KW(max. power3.7 KW)
- Induction

### **Design**

- Comfort profile
- DirectSelect Premium touch control




### **Comfort**

- MoveMode (3 levels)
- Digital display
- 17 power levels
- Switch off timer for every cooking zone Timer
- Timer
- Count-up timer
- QuickStart Function
- ReStart Function
- Energy consumption display
- 2 stage residual heat indicator
- Main switch
- Automatic pan recognition sensor.
- Power management function.
- Safety switch-off.
- Childproof lock.
- Wipe protection function
- PerfectFry sensor with 5 temperature settings: prevents scorching with the automatic temperature regulation of the integrated sensor.
- PowerBoost function for all zones

### **Technical Information**

- Measurement: (H/B/T) 51 x 916 x 527 mm
- Required niche size for installation (HxWxD mm) : 51 x 880 x (490 - 500)
- Min. worktop thickness: 16 mm mm
- Cable included
- Connection cable 110 cm
- Connected load: 11.1 KW

## Series 8, Flex induction hob, 90 cm, Black, PXX975DC1E

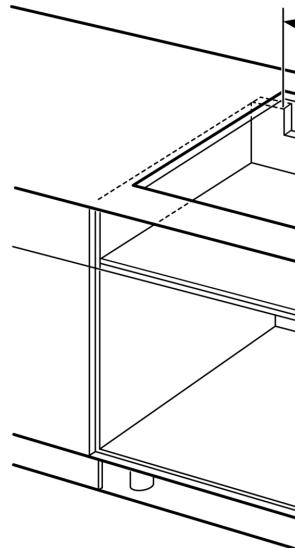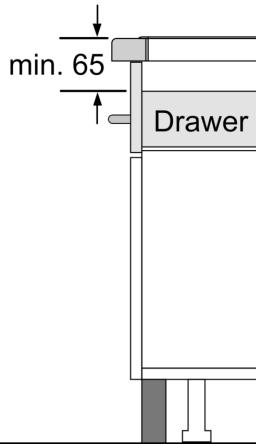

① Ventilation gap must be present.