

**Series 2, free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
Stainless steel look
KGN36NL30U**



**The bottomfreezerr with electronic
temperature control and vegetable
drawer: set the temperature easily and
precisely.**

- **Perfect Fit:** place your fridge right next to walls or in a niche.
- **LED lighting:** keep your groceries in perfect view.
- **Door Open Alarm:** Reminds you if the door is not closed properly.
- **MultiAirflow System provides even air distribution in the fridge for prolonged freshness.**
- **The new organized shelving system, paired with LED lighting, clearly displays all freezer items!**

Built-in / Free-standing:	Free-standing
Number of compressors:	1
Number of independent cooling systems:	1
Width of the appliance:	600 mm
Height:	1860 mm
Depth of the product:	660 mm
Net weight:	59.3 kg
Door panel options:	Not possible
Door hinge:	Right reversible
Number of Adjustable Shelves in fridge compartment:	3
Shelves for Bottles:	No
Frost free system:	Fridge
Interior ventilator:	No
Reversible Door Hinge:	Yes
Length electrical supply cord:	240.0 cm
Noise level:	42 dB(A) re 1 pW
Multi-Flow Air Tower:	Yes
Fast cooling switch:	No
Fast freezing function:	No
Temperature Controlled Drawer:	No
Humidity Control Drawer:	No
Number of Door Bins - Refrigerator:	4
Door bin adjustability - Refrigerator:	No
Tilt-out door bins in fridge:	No
Gallon wide door bins:	Yes
Number of Gallon storage:	1
Motorized Shelf:	No
Material of the shelves:	Safety glass
Door opened indicator freezer:	No
Automatic motor-driven ice-maker:	No
Connection rating:	100 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Storage Period in Event of Power Failure (h):	19 h
Door panel options:	Not possible
Noise level:	42 dB(A) re 1 pW
ENERGY STAR® certified:	No
Plug type:	Gardly plug w/ earthing
Required cutout/niche size for installation (in):	x
Dimensions of the packed product:	75.78 x 25.98 x 30.11
Net weight:	131.000 lbs
Gross weight:	148.000 lbs



4 242002 878737

Series 2, free-standing fridge-freezer with freezer at bottom, 186 x 60 cm, Stainless steel look KGN36NL30U

**The bottomfreezerr with electronic
temperature control and vegetable
drawer: set the temperature easily and
precisely.**

Performance and consumption

Design

- Doors Stainless steel look, side panels Pearl grey (VZF 07127)
- Integrated door handle, white
- LED with Soft Start in fridge section

Comfort and Safety

- NoFrost
- LED electronic control
- Super freezing with automatic switch off

Fridge Section

- Multi Airflow-System
- 4 safety glass shelves of which 3 are height adjustable
- 4 door bins

Freshness System

- 1 MultiBox - Transparent drawer with a corrugated bottom, ideal for storing fruits and vegetables.

Freezer Section

- 3 transparent freezer drawers
- Calendar frozen food

Dimensions

- Dimensions (H x W x D): 186.0 cm x 60.0 cm x 66.0 cm

Technical Information

- Door right hinged, reversible
- Height adjustable front feet, roles in the back
- Connected load: 100 W
- Nominal voltage: 220 - 240 V

Accessories

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.


Environment and Safety

Installation



General Information

**Series 2, free-standing fridge-freezer
with freezer at bottom, 186 x 60 cm,
Stainless steel look
KGN36NL30U**

Appliance name	a	b	c	d	e	f	g	h
KGN36 (Inner handle)	1860	600	660	590	600	1210	660	12
KGN36 (Outer handle)	1860	600	660	590	640	1210	700	12

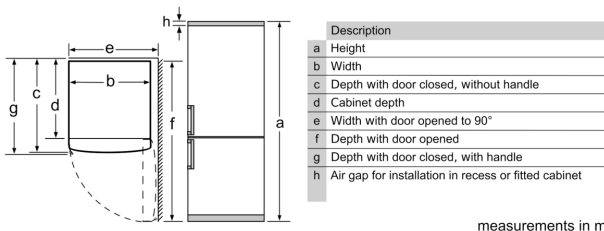

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700

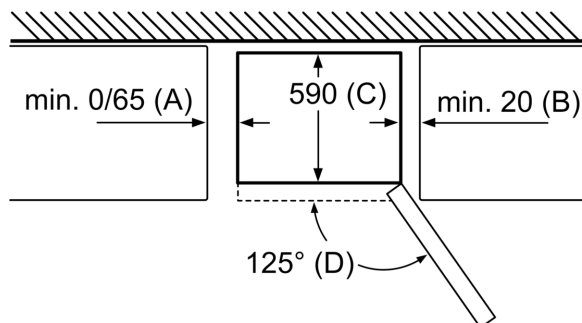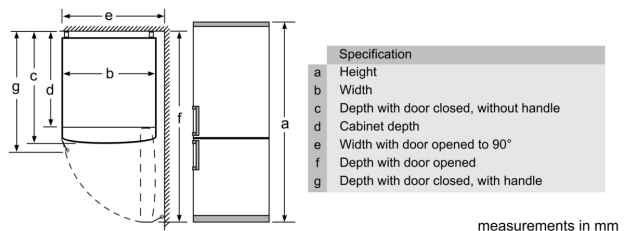

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles,
in order to open easily, a minimum distance
of 65 mm is needed.

measurements in mm