


**Series 6, Gas hob, 75 cm, Tempered glass, Black  
PPQ7A6B20**

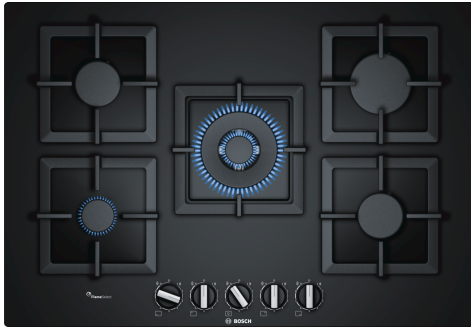

- HEZ211310 Simmer cap
- HEZ298105 Simmer plate
- HEZ298114 Small pot support
- HEZ298127 Wok ring

**The tempered-glass gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.**

- **FlameSelect:** for a precise adjustment of the flame in nine defined levels.
- **Biomethane ready:** Your gas hob can also be powered with renewable biomethane gas.

Product name/family: .....gas hob w integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Energy input: .....Gas  
 Total number of positions that can be used at the same time: ..... 5  
 Type of control setting devices: ..... sword knobs  
 Min. required niche size for installation (HxWxD): .....45 x 560-562 x 480-492 mm  
 Width of the appliance: ..... 752 mm  
 Dimensions: ..... 58 x 752 x 520 mm  
 Dimensions of the packed product (HxWxD): ..... 145 x 793 x 597 mm  
 Net weight: ..... 18.0 kg  
 Gross weight: ..... 19.5 kg  
 Residual heat indicator: .....No  
 Location of control panel: ..... Front  
 Basic surface material: ..... Tempered glass  
 Color of surface: .....Black  
 Color of frame: ..... Black  
 Length electrical supply cord: ..... 100.0 cm  
 Knob Material: .....Plastic  
 Sealed Burners: ..... No  
 Type of pan support: ..... Elongated cast iron pan support  
 Power of heating element (kW): ..... 1 kW  
 Power of 3rd heating element (kW): ..... 1.75 kW  
 Power of 5th heating element (kW): ..... 3 kW  
 Connection rating: ..... 1 W  
 Gas connection rating: ..... 11500 W  
 Fuse protection: .....3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Energy input: .....Gas  
 Gas type: ..... Nat gas H/E/(L) 20 (25) mbar  
 Alternative gas type: .....Liquid gas G30,31 28-30/37mbar  
 Plug type: .....No plug (electrical connection by electrician)  
 Appliance Dimensions (h x w x d) (in): ..... x x  
 Dimensions of the packed product: ..... 5.70 x 23.50 x 31.22  
 Net weight: .....40.000 lbs  
 Gross weight: ..... 43.000 lbs  
 Total number of positions that can be used at the same time: ..... 5  
 Length electrical supply cord: ..... 100.0 cm  
 Min. required niche size for installation (HxWxD): .....45 x 560-562 x 480-492 mm  
 Dimensions: ..... 58 x 752 x 520 mm  
 Dimensions of the packed product (HxWxD): ..... 145 x 793 x 597 mm  
 Net weight: ..... 18.0 kg  
 Gross weight: ..... 19.5 kg



