



BM450110

1 x combination grid
1 x glass tub

Built-in Compact Microwave Oven 400 series
60 x 45 cm, Door hinge: Right, Stainless steel
behind glass

BM450110

Handleless door / automatic door opening
Single operation and combination of microwave,
grill and oven
Sequential operation of up to 5 modes incl.
programming of combined operation and rest
time
TFT touch display
Panel-free appliance with surface control
module
Electronic temperature control
Interior volume 36 litres

Programmes

Microwave operation with 5 output levels: 1000,
600, 360, 180, 90 W.
Oven operation with 4 heating methods:
Hot air 40 °C and from 100 °C to 250 °C, Full
surface grill + hot air from 100 °C to 250 °C,
Full surface grill + circulated air from 100 °C to
250 °C, Full surface grill with 3 levels of
intensity, maximum output 2000 W.
Heating methods with microwave output levels
600, 360, 180 and 90 W freely combinable.
15 automatic programmes with weight
indication, customisable:
4 defrosting programmes 4 cooking
programmes 7 combination programmes
Option to save individual recipes.

Handling

Automatic door opening.
Rotary knob and TFT touch display operation.
Information key with use indicators.
Side-opening door opens up to 180° angle.

Features

Innowave.
Rapid heating.
4 tray levels.
Actual temperature display.
60 W halogen light on the side.

Safety

Thermally insulated door with triple glazing.
Triple door lock.
Child lock.
Safety shut-off.
Cooled housing with temperature protection.

Cleaning

Hygienic stainless steel interior with glass
ceramic base.
Interior back wall with catalytic coating.


Planning notes

Door hinge not reversible.
Plan the niche without back wall.
The door panel surface of the appliance extends
47 mm from the furniture cavity.
If the handle (optional accessory) is retrofitted,
the outer edge of the door handle extends 94
mm from the furniture cavity.
Consider the overhang, incl. the door handle
where applicable, when planning to open
drawers next to the appliance.
When planning a corner solution, pay attention
to the 110° door opening angle.

The mains socket needs to be planned outside
of the built-in niche.

Connection

Total connected load 3.1 KW.
Connection cable 1.5 m without plug.

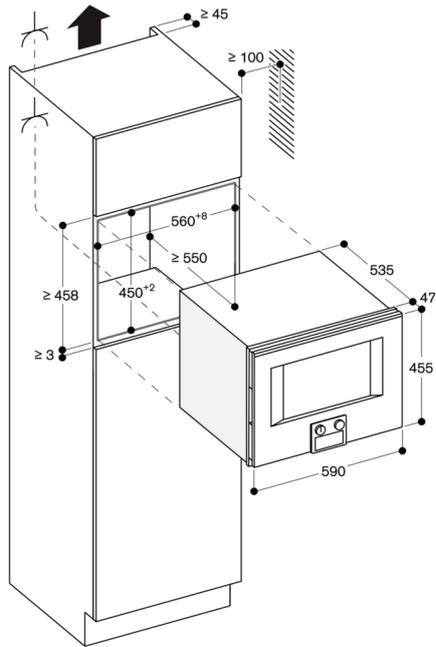

⚡ Socket

measurements in mm

Side view of BM 454/455 above BO

