



BM484110

1 x combination grid  
1 x glass tub

**Built-in Compact Microwave Oven 400 series**  
**76 x 45 cm, Door hinge: Right, Stainless steel**  
**behind glass**

**BM484110**

Handleless door / automatic door opening  
Single operation and combination of microwave,  
grill and oven  
Sequential operation of up to 5 modes incl.  
programming of combined operation and rest  
time  
TFT touch display  
Panel-free appliance with surface control  
module  
Electronic temperature control  
Interior volume 36 litres

#### Programmes

Microwave operation with 5 output levels: 1000,  
600, 360, 180, 90 W.  
Oven operation with 4 heating methods:  
Hot air 40 °C and from 100 °C to 250 °C, Full  
surface grill + hot air from 100 °C to 250 °C,  
Full surface grill + circulated air from 100 °C to  
250 °C, Full surface grill with 3 levels of  
intensity, maximum output 2000 W.  
Heating methods with microwave output levels  
600, 360, 180 and 90 W freely combinable.  
15 automatic programmes with weight  
indication, customisable:  
4 defrosting programmes 4 cooking  
programmes 7 combination programmes  
Option to save individual recipes.

#### Handling

Automatic door opening.  
Rotary knob and TFT touch display operation.  
Clear text display.  
Information key with use indicators.  
Side-opening door opens up to 180° angle.

#### Features

Innowave.  
Rapid heating.  
4 tray levels.  
Actual temperature display.  
60 W halogen light on the side.

#### Safety

Thermally insulated door with triple glazing.  
Triple door lock.  
Child lock.  
Safety shut-off.  
Cooled housing with temperature protection.

#### Cleaning

Hygienic stainless steel interior with glass  
ceramic base.  
Interior back wall with catalytic coating.


#### Planning notes

Door hinge not reversible.  
The door panel surface of the appliance extends  
47 mm from the furniture cavity.  
If the handle (optional accessory) is retrofitted,  
the outer edge of the door handle extends 94  
mm from the furniture cavity.  
Consider the overhang, incl. the door handle  
where applicable, when planning to open  
drawers next to the appliance.  
When planning a corner solution, pay attention  
to the 110° door opening angle.

The mains socket needs to be planned outside  
of the built-in niche.

#### Connection

Total connected load 3.1 KW.  
Connection cable 1.5 m without plug.

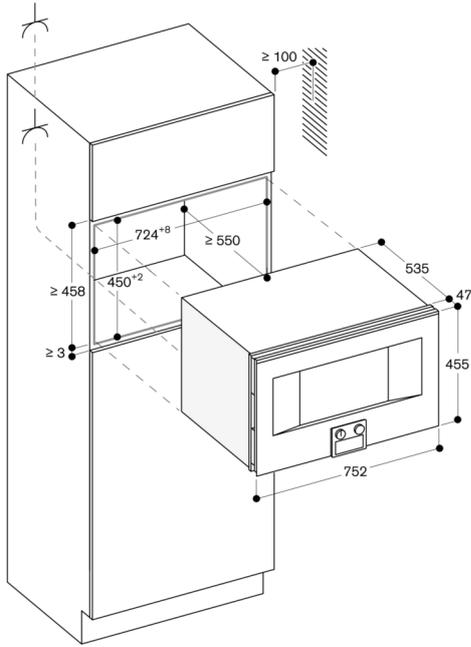

Socket

measurements in inches (mm)

Side view of BM 484/485 above BO

