


iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

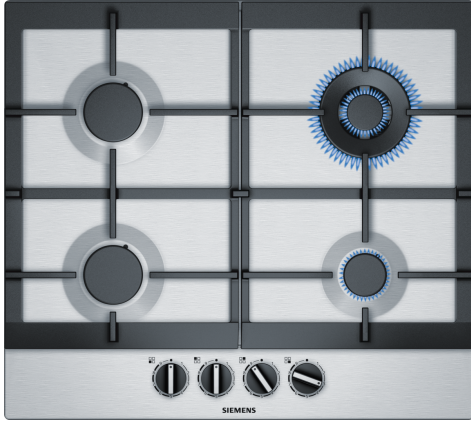

HZ233440	Wok ring
HZ241110	Small pot support
HZ298105	Simmer plate

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology: precise heat control with nine different flame steps.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.

Product name/family: gas hob w
integrated controls
Design: Built-in
Type of heating: Gas
Total number of positions that can be used at the same time: 4
Type of control setting devices:sword knobs
Min. required niche size for installation (HxWxD):45 x 560-562 x
480-492 mm
Width of the appliance: 582 mm
Dimensions: 53 x 582 x 520 mm
Dimensions of the packed product (HxWxD): ... 141 x 651 x 578 mm
Net weight: 12.2 kg
Gross weight: 13.0 kg
Residual heat indicator: No
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 100.0 cm
EAN code:4242003742006
Gas connection rating: 8000 W
Fuse protection:3 A
Voltage:220-240 V
Frequency:60; 50 Hz



iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HC90

Design

- Stainless steel surface
- cast iron pan support

Comfort & Convenience

- Step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Connected load: 8 KW

iQ500, Gas Hob, 60 cm, Stainless steel
EC6A5HC90

