


iQ500, Gas Hob, 90 cm, Stainless steel
EC9A5RB90

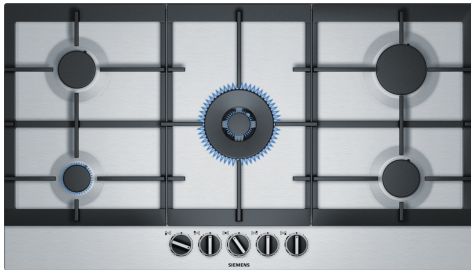

HZ211310	Simmer cap
HZ233540	Wok ring
HZ241110	Small pot support
HZ298105	Simmer plate

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology: precise heat control with nine different flame steps.
- ✓ The dual wok burner with dual flame system and up to 5 kW of power (depending on gas type) is ideal for a wide variety of foods, even in large quantities.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.

Product name/family: gas hob w integrated controls
 Design: Built-in
 Type of heating: Gas
 Total number of positions that can be used at the same time: 5
 Type of control setting devices:sword knobs
 Min. required niche size for installation (HxWxD):45 x 850-852 x 490-502 mm
 Width of the appliance: 915 mm
 Dimensions:53 x 915 x 520 mm
 Dimensions of the packed product (HxWxD): . 165 x 1116 x 659 mm
 Net weight: 15.5 kg
 Gross weight: 17.7 kg
 Residual heat indicator: No
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 150.0 cm
 EAN code:4242003742204
 Gas connection rating: 12500 W
 Fuse protection:3 A
 Voltage:220-240 V
 Frequency:60; 50 Hz



iQ500, Gas Hob, 90 cm, Stainless steel

EC9A5RB90

Design

- Stainless steel surface
- cast iron pan support

Comfort & Convenience

- Step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

Burners and power

- 5 PC
- Including 1 Dual Wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 5 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Dimensions of the product (HxWxD mm): 53 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m

**iQ500, Gas Hob, 90 cm, Stainless steel
EC9A5RB90**

