

**Series 4, Freestanding Fridge-freezer
(Bottom freezer), 186 x 60 cm,
Stainless steel (with anti-fingerprint)
KGN36XI33Z**



A++



**The NoFrost bottomfreezer with VitaFresh:
Keeps your fresh foods fresh longer.**

- **A++ energy class refrigerator consumes 40% less energy than A energy class.**
- **VitaFresh: keeps food fresh for longer in climate controlled drawers at near 0°C.**
- **Perfect Fit: place your fridge right next to walls or in a niche.**
- **Super Cooling function: cools new food placed inside faster, thus protecting already cooled food.**
- **Super Freezing function: Protects frozen food from defrosting.**

Built-in / Free-standing:	Free-standing
Number of compressors:	1
Number of independent cooling systems:	2
Width of the appliance:	600 mm
Height:	1860 mm
Depth:	660 mm
Net weight:	72.7 kg
Door panel options:	Not possible
Door hinge:	Right reversible
Number of Adjustable Shelves in fridge compartment:	2
Shelves for Bottles:	Yes
Frost free system:	Freezer
Interior ventilator:	No
Reversible Door Hinge:	Yes
Length electrical supply cord:	240.0 cm
Connection rating:	100 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50 Hz
Storage Period in Event of Power Failure (h):	16 h



Series 4, Freestanding Fridge-freezer (Bottom freezer), 186 x 60 cm, Stainless steel (with anti-fingerprint) KGN36XI33Z

The NoFrost bottomfreezer with VitaFresh: Keeps your fresh foods fresh longer.

Consumption

- Energy efficiency class: A++
- Energy efficiency class: A++ (260 kWh per year). Actual energy consumption will depend on how the appliance is used and where it is located.
- Total net capacity: 324 litres
- Noise level dB(A) re 1 pW: 39

Design

- Doors inox EasyClean, side panels Pearl grey (VZF 07127)
- vertical door handle
- LED with Soft Start in fridge section

Comfort and Safety

- Frost free - never again defrosting
- Twin in-door LED electronic control
- Single Compressor
- Supercool function
- Superfreeze Function
- Optical and acoustic warning system
- Optical and Acoustic Malfunction Warning

Fridge Section

- Net capacity refrigeration zone: 237 l
- Multi Airflow-System
- Air Fresh Filter
- 4 safety glass shelves (2 height adjustable)
- Wine Rack
- 1 door shelf large, 2 door shelf small

Freshness System

- 24 litre Near 0°C chiller section
- 1 vege.cont.w.int.humi.control
- , 2 Chiller temp adjustable

Freezer Section

- Net freezer capacity 87 litres
- Freezing capacity: 14 kg in 24 hours
- Storage time in power failure: 16 Hours
- 3 transparent freezer drawers
- Calendar frozen food

APPLIANCE DIMENSION

- Dimensions: H 186 cm x L 60 cm x D 66 cm

TECHNICAL INFORMATION

- Door right hinged, reversible
- Height adjustable front feet, roles in the back
- Climate Class SN-T
- Connected load 100 W
- Rated Voltage 220 - 240 V

Standard Accessories

- 3 x egg tray, 1 x ice cube tray with lid

Country Specific Options


- Gross capacity, total: 357 l
- Gross capacity cooling 247 l
- **** freezer 110 l (-18°C and below)
- Based on the results of the standard 25-hour test. Actual consumption depends on usage/position of the appliance.
- To achieve the declared energy consumption, the attached distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.

ENVIREMENT AND SAFETY

General Information


**Series 4, Freestanding Fridge-freezer
(Bottom freezer), 186 x 60 cm,
Stainless steel (with anti-fingerprint)
KGN36XI33Z**

Appliance name	a	b	c	d	e	f	g
KGN36 (Inner handle)	1860	600	660	590	600	1210	660
KGN36 (Outer handle)	1860	600	660	590	640	1210	700

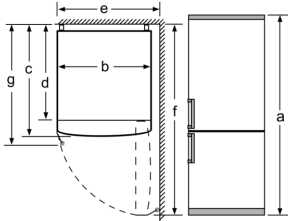

Specification	
a	Height
b	Width
c	Depth with door closed, without handle
d	Cabinet depth
e	Width with door opened to 90°
f	Depth with door opened
g	Depth with door closed, with handle

measurements in mm

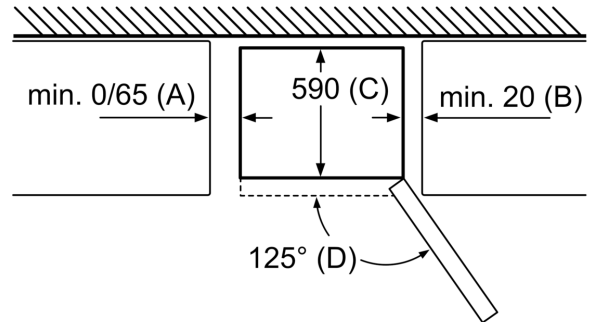

Appliance name	A	B	C	D
KGN33, 36, 39, 46, 49	0/65	20	590	125
KGF39, 49	0/65	20	590	125

Dimension A:
In models with vertical integrated handles,
in order to open easily, a minimum distance
of 65 mm is needed.

measurements in mm