


**iQ300, Canopy Extractor, 75 cm,
Silver metallic
LB75565**

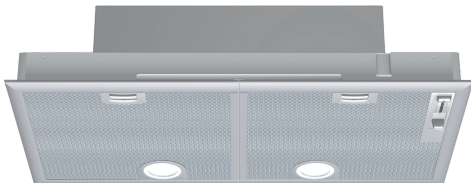

HZG9AS00S	Adapter
LZ73050	Standard odor filter
LZ74020	Installation kit for canopy

The powerful canopy cooker hood is concealed above the cooktop.

✓ LED light: For optimal visibility and atmosphere when cooking.

Typology: Built-in/Built-under
 Length electrical supply cord: 130.0 cm
 Min. required niche size for installation (HxWxD): 255mm x 700.0mm x 350mm mm
 Minimum distance above an electric hob:650 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 8.2 kg
 Type of control: mechanical
 Number of speed settings:3-stages + intensive setting
 Max. air extraction: 379 m³/h
 Boost position output recirculating:408.0 m³/h
 Max. recirculation: 278 m³/h
 Boost position air extraction:638 m³/h
 Maximum Air flow: 379 m³/h
 Number of lights:2
 Noise level:56 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material: Washable aluminium
 EAN code:4242003838402
 Connection rating: 206 W
 Fuse protection:10 A
 Voltage:220-240 V
 Frequency:50 Hz
 Plug type: Gardy plug w/ earthing
 Installation typology: Built-in



iQ300, Canopy Extractor, 75 cm, Silver metallic LB75565

- Energy Efficiency Class: C*
- Average Energy Consumption: 81.2 kWh/year*
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 56 dB*

Variant:

Design:

Comfort:

Comfort and Safety:

Measures:

Operating and power:

- For installation in a modified cupboard, above a hob
- Suitable for ducted extraction and recirculation
- Charcoal filter
- Removable metal grease filters, dishwasher safe
- Light Intensity: 410 lux
- Colour Temperature: 3500 K
- Sliding switch control for extractor speeds and light
- 3 speed control plus intensive setting
- Twin motor
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 379 m³/h Intensive 638 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56 dB(A) re 1 pW (43dB(A) re 20 µPa sound pressure)
- Intensive: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Max. extraction rate: 638 m³/h
- Dimensions (HxWxD): 255 x 730 x 380 mm
- built-in dimensions (HxWxD): 255 x 700 x 350 mm
- Power rating: 206 W
- 120 or 150 mm diameter pipe
- Yes

* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy Extractor, 75 cm,
Silver metallic
LB75565

