


iQ700, Wall-mounted Extractor Hood, 90 cm, clear glass black printed LC91KWW60S



A+

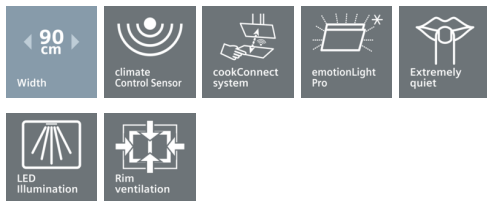

Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ Brushless blower: powerful and quiet extraction of steam.
- ✓ cookConnect System: Control your extractor hood directly from your Cooktop (with matching cooktop).
- ✓ The climateControl Sensor monitors steam and odors and adjusts the power level automatically.
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ Adjust the power level of your hood and other functions via the Home Connect App.

Features

Technical data

Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 323
 Net weight (kg) : 25.462
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 527
 Boost position output recirculating (m³/h) : 587.0
 Boost position air extraction (m³/h) : 988
 Number of lights : 2
 Noise level (dB(A) re 1 pW) : 56
 Diameter of air outlet (mm) : 120 / 150
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : HZG9AS00S, LZ00XXP00, LZ10AKA00, LZ10AKR00, LZ10AKS00, LZ10AKT00, LZ10AKU00, LZ10AXC50, LZ10AXK50, LZ10AXL50, LZ11AXC56, LZ31XXB16, LZ56200
 Type of lamps used : LED
 Connection Rating (W) : 270
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Glass, Lacquered
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 27.16 x 29.13 x 40.94
 Net weight (lbs) : 56
 Gross weight (lbs) : 74
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 454 x 890.0 x 499.0
 Dimensions of the packed product (HxWxD) (mm) : 690 x 740 x 1040
 Net weight (kg) : 25.462
 Gross weight (kg) : 33.4

Optional accessories

LZ56200 CleanAir active carbon filter spare part



iQ700, Wall-mounted Extractor Hood, 90 cm, clear glass black printed LC91KWW60S

Features

- Energy Efficiency Class: A+*
- Average Energy Consumption: 32.2 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 55 dB*

Technical information:

- Chimney hood
- 90 cm
- black
- Glas plate: clear glass black printed
- Boost function
- Ducted/Recirculating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Designed for wall mounted installation

Remote Monitoring and Control (only in countries where Home Connect service is available)

- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- cooktop
- (with matching cooktop)
- None, cooktop
-
-
- Gas spring 3
- Electronic controls
- 3-stage + 2 intensive
- Inner frame: yes
- T55-SE7E with Electronic display, 2x7-segment
- T55-SE7E (3-stage + 2 intensive) with Electronic display, 2x7-segment
- 10 min.
- 2 capture areas: front side and bottom side
- Intensive op. revert dur.: 6 min.
- Easy to clean
-
-
- Ambient light RGB
- Light dimmer function
- softLight
- Twin channel high performance fan motor
- BLDC for Ventilation
- 2 x 3W LED
- Light Intensity: 460 lux
- Colour Temperature: 3500 K
- Metal grease filter with side extraction
- grease- and charcoal filter

- Filter cover glass
-
-
- Removable metal grease filters, dishwasher safe
- Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 540 m³/h Intensive 980 m³/h
- Ducted extraction rate according to DIN/EN 61591max. 540 m³/h
- Maximum extraction 540 m³/h
- Extraction rate exhaust air according to EN 61591:
- max. normal use 540 m³/h, intensive 980 m³/h
- Additional noise insulation
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 55 dB(A) re 1 pW (41 dB(A) re 20 µPa sound pressure)
- Intensive: 68 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Yes
- Max. extraction rate: 980 m³/h
- Extraction rate in recirculation mode:
- Max. normal use: 470 m³/h
- Intensive: 670 m³/h
- Noise levels in recirculation mode:
- Max. normal use: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Intensive: 78 dB(A) re 1 pW (64 dB(A) re 20 µPa sound pressure)
- Power rating: 270 W
- Dimensions exhaust air (HxWxD): 930-1200 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 990-1260 x 890 x 499 mm
- Dimensions recirculating, chimless (HxWxD): 454 mm x 890 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1120 x 890 x 499 mm - mounting with outer chimney
- 1190-1460 x 890 x 499 mm - mounting with telescopic chimney