


iQ700, Wall-mounted Extractor Hood, 90 cm, clear glass black printed LC97FVW60S



B

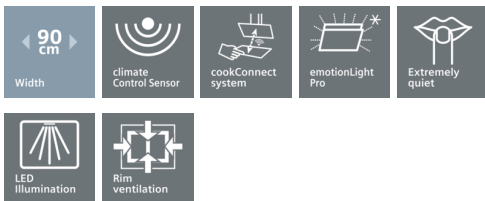

Extractor hood in Flat design with high extraction rate for a powerful performance. Extractor hood in Flat design with high extraction rate for a powerful performance.

- ✓ Brushless blower: powerful and quiet extraction of steam.
- ✓ cookConnect System: Control your extractor hood directly from your Cooktop (with matching cooktop).
- ✓ The climateControl Sensor monitors steam and odors and adjusts the power level automatically.
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ Adjust the power level of your hood and other functions via the Home Connect App.

Features

Technical data

Typology : Chimney
 Approval certificates : CE, VDE
 Length electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 430
 Net weight (kg) : 25.966
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m3/h) : 394
 Boost position output recirculating (m3/h) : 527.0
 Boost position air extraction (m³/h) : 717
 Number of lights : 2
 Noise level (dB(A) re 1 pW) : 57
 Diameter of air outlet (mm) : 120 / 150
 Odour filter : No
 Operating Mode : Convertible
 Delay Shut off modes : 10M
 Optional accessories : HZG9AS00S, LZ00XXP00, LZ10AFA00, LZ10AFR00, LZ10AF500, LZ10AFT00, LZ10AFU00, LZ10AXC50, LZ10AXK50, LZ56200, LZ10AXL50, LZ11AXC56, LZ31XXB16
 Type of lamps used : LED
 Connection Rating (W) : 150
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50; 60
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Glass, Lacquered
 Approval certificates : CE, VDE
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product (in) : 21.25 x 29.52 x 40.15
 Net weight (lbs) : 57
 Gross weight (lbs) : 73
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord (cm) : 130
 Dimensions of the product, with chimney (if exists) (mm) : 500 x 890.0 x 263.0
 Dimensions of the packed product (HxWxD) (mm) : 540 x 750 x 1020
 Net weight (kg) : 25.966
 Gross weight (kg) : 33.1

Optional accessories

LZ56200 CleanAir active carbon filter spare part



iQ700, Wall-mounted Extractor Hood, 90 cm, clear glass black printed LC97FVW60S

Features

- Energy Efficiency Class: A*
- Average Energy Consumption: 37.2 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Noise max. Normal Level: 57 dB*

Variant:

Design:

Operating and power:

Comfort and Safety:

Comfort:

Measures:

Technical information:

- Chimney hood
- 90 cm
- black
- Glas plate: clear glass black printed
- Boost function
- Ducted/Recirculating operation
- In recirculation operation chimneyless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Designed for wall mounted installation

Remote Monitoring and Control (only in countries where Home Connect service is available)

- Remote Monitoring and Control for connected home appliances and operation via smartphone or tablet (only in countries where Home Connect service is available)
- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)
- cooktop
- (with matching cooktop)
- None, cooktop
-
- Gas spring 3
- Electronic controls
- 3-stage + 2 intensive
- Inner frame: yes
- T55-SE7E with Electronic display, 2x7-segment
- T55-SE7E (3-stage + 2 intensive) with Electronic display, 2x7-segment
- 10 min.
- 2 capture areas: front side and bottom side
- Intensive op. revert dur.: 6 min.
- Easy to clean
-
-
- Ambient light RGB

- Light dimmer function
 - softLight
 - BLDC for Ventilation
 - 2 single inlet vertical, BLDC for Ventilation
 - 2 x 3W LED
 - Light Intensity: 460 lux
 - Colour Temperature: 3500 K
 - Metal grease filter with side extraction
 - grease- and charcoal filter
 - Filter cover glass
 -
 -
 - Removable metal grease filters, dishwasher safe
 - Extraction rate according to DIN/EN 61591 ø 15 cm: max. Normal 420 m³/h Intensive 730 m³/h
 - Ducted extraction rate according to DIN/EN 61591max. 420 m³/h
 - Maximum extraction 420 m³/h
 - Extraction rate exhaust air according to EN 61591:
 - max. normal use 420 m³/h, intensive 730 m³/h
 - Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW (43 dB(A) re 20 µPa sound pressure)
 - Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 57 dB(A) re 1 pW (43 dB(A) re 20 µPa sound pressure)
 - Intensive: 69 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
 - Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
 - Yes
 - Max. extraction rate: 730 m³/h
 - Extraction rate in recirculation mode:
 - Max. normal use: 290 m³/h
 - Intensive: 520 m³/h
 - Noise levels in recirculation mode:
 - Max. normal use: 59 dB(A) re 1 pW (45 dB(A) re 20 µPa sound pressure)
 - Intensive: 72 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)
 - Power rating: 150 W
 - Dimensions exhaust air (HxWxD): 969-1239 x 890 x 263 mm
 - Dimensions recirculating, chimney (HxWxD): 1029-1299 x 890 x 263 mm
 - Dimensions recirculating with CleanAir module (HxWxD):
 - 1159 x 890 x 263 mm - mounting with outer chimney
 - 1229-1499 x 890 x 263 mm - mounting with telescopic chimney
 - Dimensions recirculating, chimneyless (HxWxD): 500 mm x 890 x 263 mm
 - touch control for extractor speeds and light
- * In accordance with the EU-Regulation No 65/2014