


**Serie | 2, domino hob, electric, 30 cm
PKF375V14E**

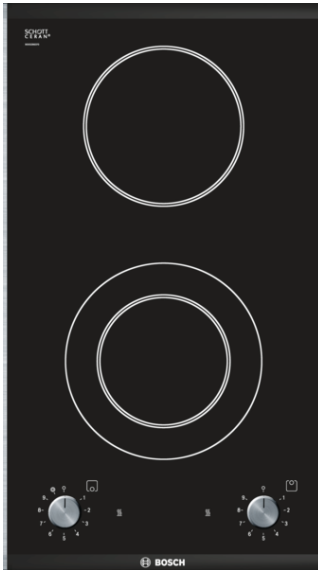

Optional accessories

HEZ394301 : Connecting strip

Ceramic domino hob: tough and easy-to-clean glass surfaces and good looks for a smart addition to your home.

- **30 cm width:** suitable for combining with other Domino and profile trim hobs.

Technical Data

| | |
|---|--------------------------------|
| Product name/family : | Vario/Domino cooking zone cera |
| Built-in / Free-standing : | CONSTR_TYPE.Built-in |
| Energy input : | Electric |
| Total number of positions that can be used at the same time : | 2 |
| Required niche size for installation (HxWxD) : | 48 x 270 x 490-500 |
| Appliance Width (mm) : | 306 |
| Dimensions of the product (mm) : | 48 x 306 x 527 |
| Dimensions of the packed product (HxWxD) (mm) : | 115 x 375 x 575 |
| Net weight (kg) : | 3.993 |
| Gross weight (kg) : | 5.0 |
| Residual heat indicator : | Separate |
| Location of control panel : | Hob front |
| Basic surface material : | Ceramic |
| Color of surface : | Black, Stainless steel |
| Color of frame : | Stainless steel |
| Approval certificates : | CE, VDE |
| Length electrical supply cord (cm) : | 100 |
| EAN code : | 4242002473215 |
| Electrical connection rating (W) : | 3200 |
| Voltage (V) : | 220-240 |
| Frequency (Hz) : | 60; 50 |



4 242002 473215

**Serie | 2, domino hob, electric, 30 cm
PKF375V14E**

Ceramic domino hob: tough and easy-to-clean glass surfaces and good looks for a smart addition to your home.

Design

- Front controls
- Metal control dials
- Can be installed with a Bosch domino hob


Features

- 2 stage residual heat indicator
- 1 dual/extendable zone

Optional accessory

- Connecting strip - HEZ394301


Serie | 2, domino hob, electric, 30 cm PKF375V14E

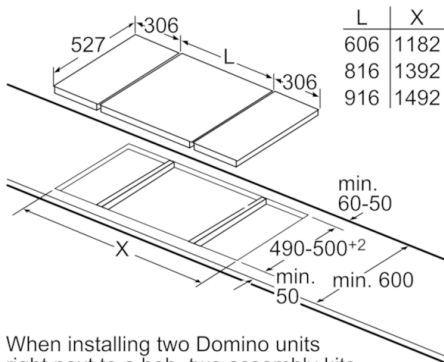

| L | X |
|-----|------|
| 606 | 1182 |
| 816 | 1392 |
| 916 | 1492 |

When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required.

Measurements in mm

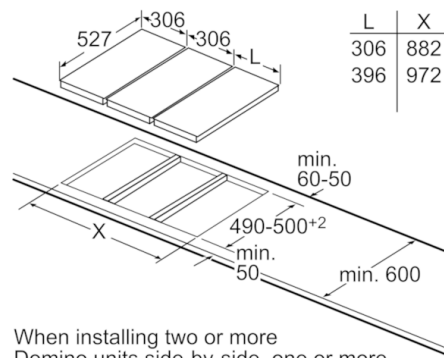


| L | X |
|-----|-----|
| 306 | 882 |
| 396 | 972 |

When installing two or more Domino units side-by-side, one or more assembly kits are required (2 units = 1 assembly kit, 3 units = 2 assembly kits, etc).

Measurements in mm

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

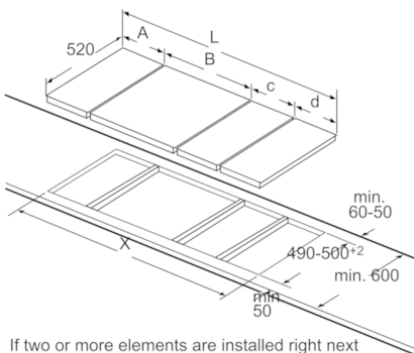

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.).

Cutout dimension (X) depending on the combination see table:

Dimensions in mm

measurements in mm
Domino combination options with corresponding appliance and cut-out dimensions

Width category:
Appliance width:

| | A | B | C | D | L | X |
|-------------------|-----|-----|-----|-----|------|------|
| 2x30 | 306 | 306 | - | - | 612 | 576 |
| 1x30, 1x40 | 306 | 396 | - | - | 702 | 666 |
| 1x30, 1x60 | 306 | 606 | - | - | 912 | 876 |
| 1x30, 1x70* | 306 | 710 | - | - | 1016 | 980 |
| 1x30, 1x80 | 306 | 816 | - | - | 1122 | 1086 |
| 1x30, 1x90 | 306 | 916 | - | - | 1222 | 1186 |
| 2x40 | 396 | 396 | - | - | 792 | 756 |
| 1x40, 1x60 | 396 | 606 | - | - | 1002 | 966 |
| 1x40, 1x70* | 396 | 710 | - | - | 1106 | 1070 |
| 1x40, 1x80 | 396 | 816 | - | - | 1212 | 1176 |
| 1x40, 1x90 | 396 | 916 | - | - | 1312 | 1276 |
| 3x30 | 306 | 306 | 306 | - | 918 | 882 |
| 2x30, 1x40 | 306 | 306 | 396 | - | 1008 | 972 |
| 2x30, 1x60 | 306 | 306 | 606 | - | 1218 | 1182 |
| 2x30, 1x70* | 306 | 306 | 710 | - | 1322 | 1286 |
| 2x30, 1x80 | 306 | 306 | 816 | - | 1428 | 1392 |
| 2x30, 1x90 | 306 | 306 | 916 | - | 1528 | 1492 |
| 1x30, 2x40 | 306 | 396 | 396 | - | 1098 | 1062 |
| 1x30, 1x40, 1x60 | 306 | 396 | 606 | - | 1308 | 1272 |
| 1x30, 1x40, 1x70* | 306 | 396 | 710 | - | 1412 | 1376 |
| 1x30, 1x40, 1x80 | 306 | 396 | 816 | - | 1518 | 1482 |
| 1x30, 1x40, 1x90 | 306 | 396 | 916 | - | 1618 | 1582 |
| 2x40, 1x60 | 396 | 396 | 606 | - | 1398 | 1362 |
| 4x30 | 306 | 306 | 306 | 306 | 1224 | 1188 |
| 3x30, 1x40 | 306 | 306 | 306 | 396 | 1314 | 1278 |
| 1x30, 1x75 | 306 | 750 | - | - | 1056 | 1020 |
| 1x40, 1x75 | 396 | 750 | - | - | 1146 | 1110 |
| 2x30, 1x75 | 306 | 306 | 750 | - | 1362 | 1326 |
| 1x30, 1x40, 1x75 | 306 | 396 | 750 | - | 1452 | 1416 |

* Not possible with 70 cm induction hob