


## iQ100, Domino induction hob, 30 cm, Black EH375FBB1E



Product name/family: ..... Vario/Domino cooking zone cera  
 Built-in / Free-standing: ..... Built-in  
 Energy input: ..... Electric  
 Total number of positions that can be used at the same time: 2  
 Min. required niche size for installation (HxWxD): ..... 51 x 270 x 490-500 mm  
 Width of the appliance: ..... 302 mm  
 Dimensions: ..... 51 x 302 x 520 mm  
 Dimensions of the packed product (HxWxD): ... 110 x 370 x 573 mm  
 Net weight: ..... 6.4 kg  
 Gross weight: ..... 7.6 kg  
 Residual heat indicator: ..... Separate  
 Location of control panel: ..... Front  
 Basic surface material: ..... Ceramic  
 Color of surface: ..... Black, Alu, brushed  
 Length electrical supply cord: ..... 110.0 cm  
 Connection Rating: ..... 3700 W  
 Voltage: ..... 220-240 V  
 Frequency: ..... 60; 50 Hz

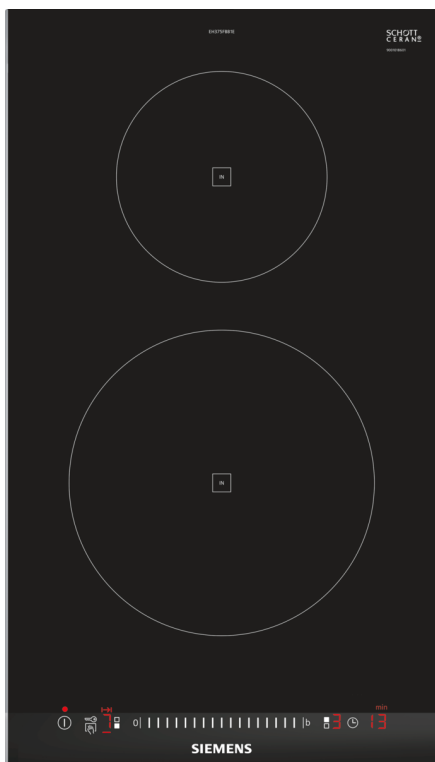

- HZ32WA00 Wireless food thermometer
- HZ390090 Wok Set consisting of 3 Items
- HZ394301 Connecting strip
- HZ9ES100 Espresso maker 4 cups
- HZ9FE280 Iron pan Ø 18 / 28 cm
- HZ9SE030 Set of 2 pots and 1 pan
- HZ9SE040 4 pieces Set
- HZ9SE060 6 pieces Set

## iQ100, Domino induction hob, 30 cm, Black EH375FBB1E

### Cooking Zone

- 2 induction cooking zones
- Cooking zones:
  - 1 x Ø 210 mm, 2200 W (max. Power level 3700 W) Induction
  - 1 x Ø 145 mm, 1400 W (max. Power level 2200 W) Induction

### Design

- Black ceramic base
- Can be combined with Domino ceramic hobs





### Key Functions


- Automatic pan recognition
- Power management function
- Automatic safety switch off
- Safety lock
- Wipe protection function
- Two stage residual heat indicators

### Dimensions

- Dimensions of the product (HxWxD mm) : 51 x 302 x 520
- Required niche size for installation (HxWxD mm) : 51 x 270 - 270 x 490-500
- Length electrical supply cord: 110 cm
- Electrical connection rating: 3700 W

iQ100, Domino induction hob, 30 cm, Black  
EH375FBB1E

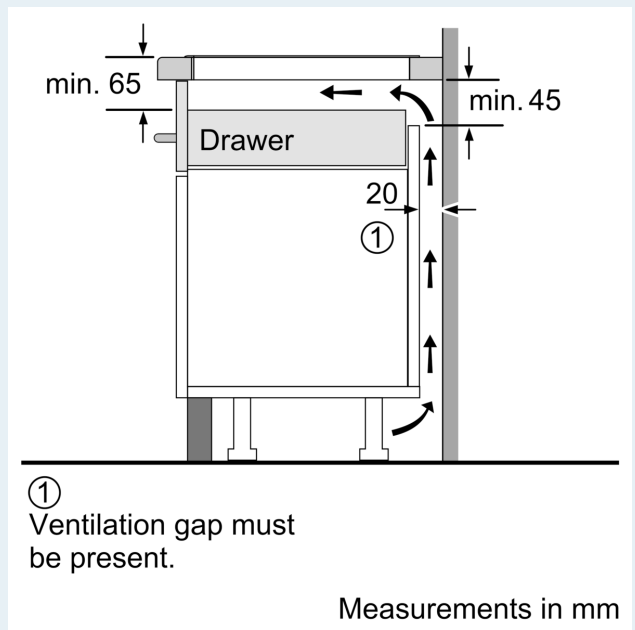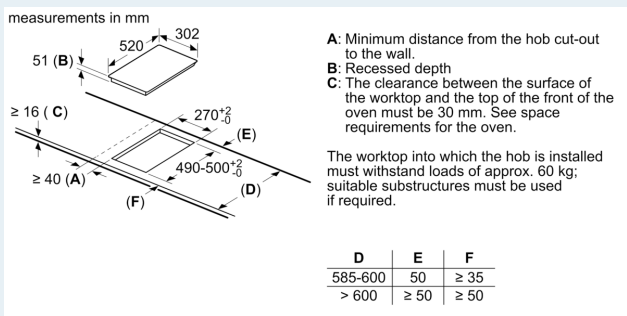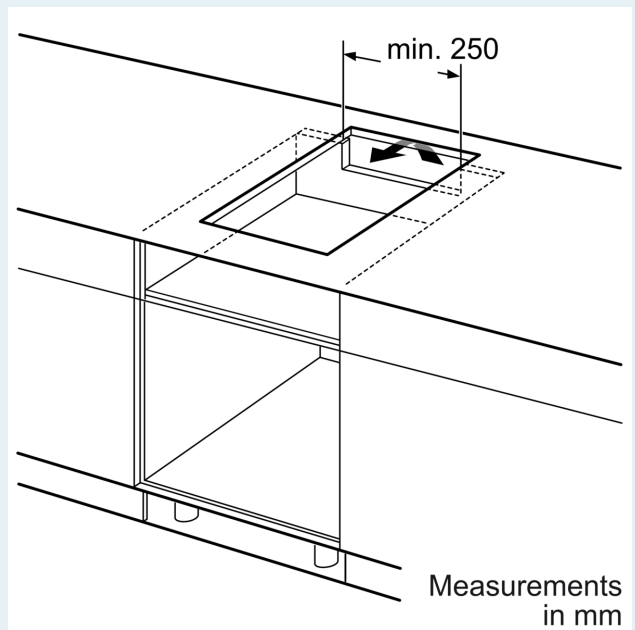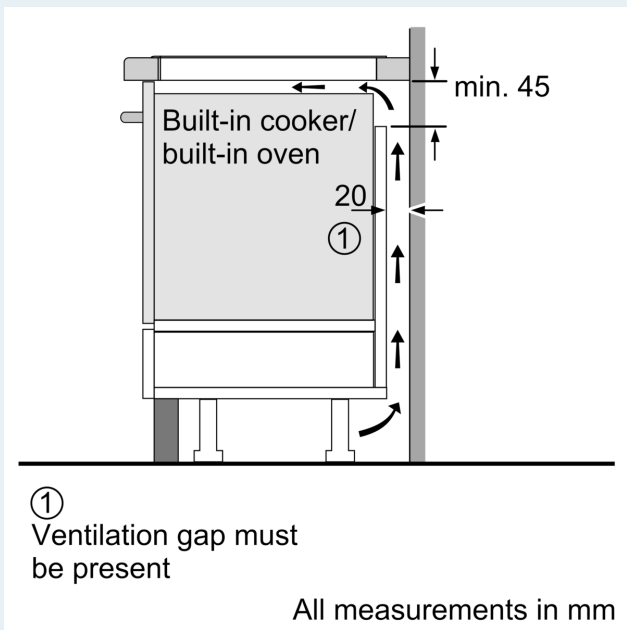


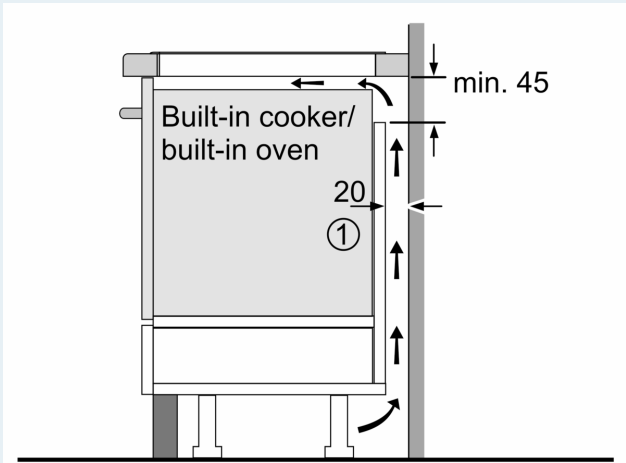

①  
Ventilation gap must  
be present

All measurements in mm


measurements in mm

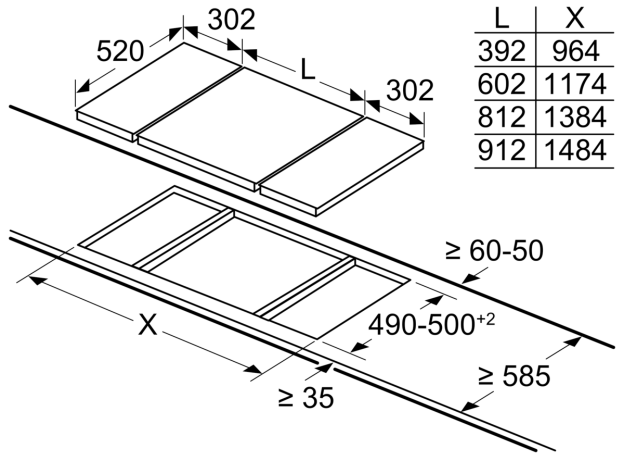

L	X
392	964
602	1174
812	1384
912	1484


When installing two Domino units right next to  
a hob, two assembly kits (HZ394301)  
are required.

measurements in mm

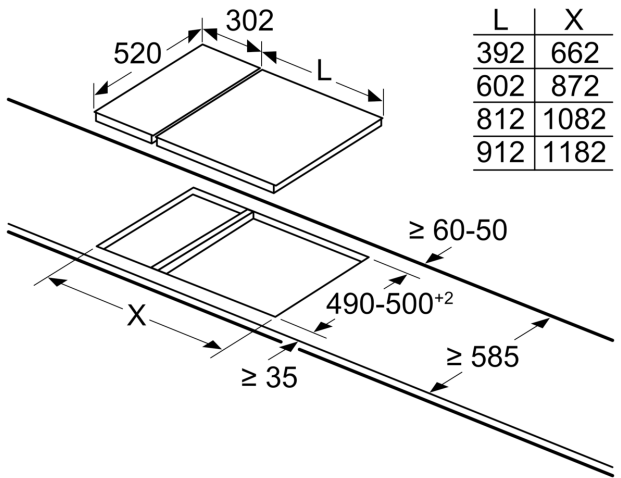


L	X
392	662
602	872
812	1082
912	1182

When installing a Domino unit right next to a  
hob, an assembly kit (HZ394301) is required.

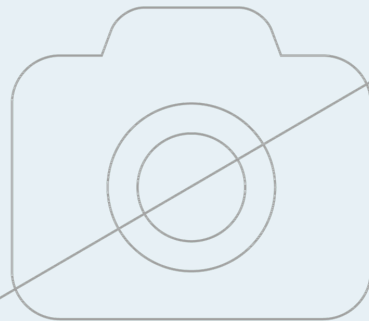


## Measurements in mm

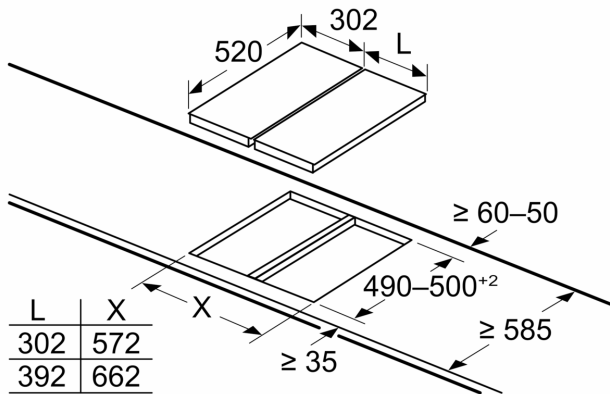

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

## measurements in mm


### Assembly kit (HZ394301) for Domino

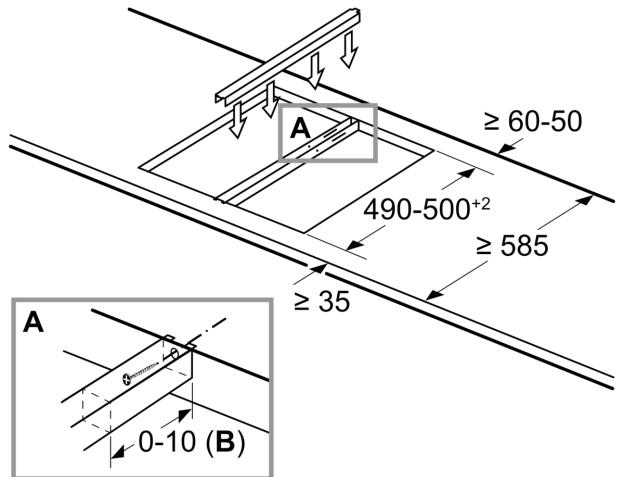

**B:** Dependent on the cut-out depth

## Measurements in mm

### Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

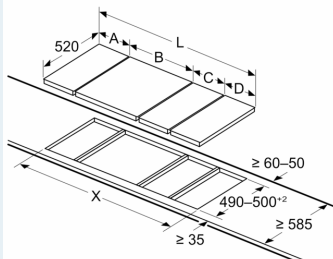

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)

## measurements in mm

### Domino combination options with corresponding appliance and cut-out dimensions

Width category: 30 40 60 70 80 90  
Appliance width: 302 392 602 710 812 912

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70*	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70*	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70*	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70*	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446
1x30, 1x75	302	750	-	-	1052	1016
1x40, 1x75	392	750	-	-	1142	1106
2x30, 1x75	302	302	750	-	1354	1318
1x30, 1x40, 1x75	302	392	750	-	1444	1408

\* Not possible with 70 cm induction hob