
GAGGENAU



Inline blower
AR 403

AR 403 722
Metal housing.
Air extraction.
HVI CFM: 440, High Speed.
Toe kick Installation.

HVI Performance Values (CFM & SONES)

Inline blower

Exhaust Discharge: horizontal
Speed: High speed
Static Pressure (in H_2O): 0.2″
HVI Watts: 95
CFM/Watt: 4.70
HVI CFM: 440
Sones (Reportable): NA

Inline blower

Exhaust Discharge: horizontal
Speed: Low Speed
Static Pressure (in H_2O): 0.2″
HVI Watts: 24
CFM/Watt: 9.51
HVI CFM: 220
Sones (Reportable): NA


Highlights
- Powerful inline blower to combine with motorless appliances AL 400, VL 200, VL 414.
- Efficient BLDC technology.
- Compact and space-saving installation in a 4″ (10 cm) high toe kick.

Output
Sound power and sound pressure depending on built-in situation.
Power levels depend on the downdraft appliances.

Features
Fan technology with highly efficient, brushless DC motor (BLDC).
Steel housing, zinc-plated.
Pipe connection pieces on intake side: 1 x 6″ DN 150 round.
Pipe connection pieces on output side: 1x DN 150 flat duct.
Retaining bracket included for top or side installation inside a cabinet.

Planning notes
Inline blower in combination with AL 400, VL 200, VL 414.
Connection to the respective appliances via network cable.
Installation in the toe kick with cut out for the air ducting in the cabinet base.
Appliance weight: approx. 23.3 lb.

Rating
Total rating 180 W.
Total amps: 2.
120 V / 60 Hz.
Includes a 60″ (1.5 m) electrical cable.
Hardwire required.
78″ (2 m) network cable included to connect with VL or AL downdraft.

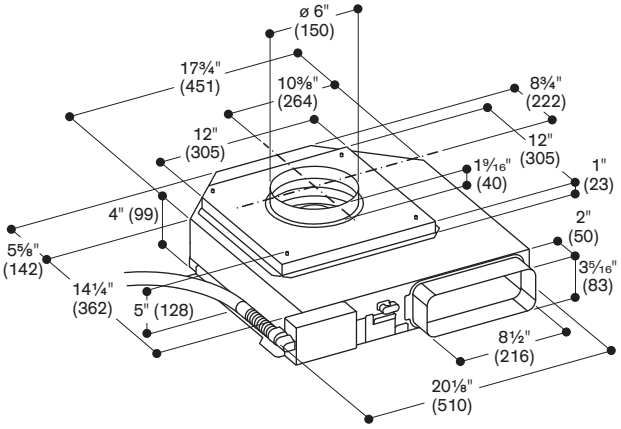

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.