


**Series 4, Gas hob, 75 cm, Stainless steel  
PGQ7B5B90**

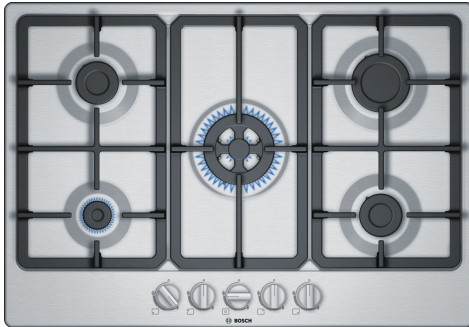

- HEZ298108 Wok ring
- HEZ298115 Small pot support
- HEZ298105 Simmer plate

**The gas hob with front-mounted controls:  
the desired cooking zones can be  
conveniently operated from the front.**

- Dual ring burner has a wide range of power from a high heat dual flame down to one small simmer flame.

Appliance type: ..... gas hob w integrated controls  
 Built-in / Free-standing: ..... Built-in  
 Heating type: ..... Gas  
 Number of cooking zones: ..... 5  
 Type of control setting devices: ..... sword knobs  
 Min. required niche size for installation (HxWxD): ..... 45 x 560-562 x 480-492 mm  
 Width of the appliance: ..... 750 mm  
 Dimensions: ..... 53x750x520 mm  
 Dimensions of the packed product (HxWxD): ..... 168 x 798 x 596 mm  
 Net weight: ..... 12.9 kg  
 Gross weight: ..... 14.5 kg  
 Residual heat indicator: ..... without  
 Location of control panel: ..... Front  
 Basic surface material: ..... Stainless steel  
 Color of surface: ..... Stainless steel  
 Length electrical supply cord: ..... 150.0 cm  
 EAN code: ..... 4242005096930  
 Gas connection rating: ..... 10800 W  
 Fuse protection: ..... 3 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz



## **Series 4, Gas hob, 75 cm, Stainless steel PGQ7B5B90**

**The gas hob with front-mounted controls:  
the desired cooking zones can be  
conveniently operated from the front.**

---

### **Design**

- Stainless steel surface
- Cast iron pan supports

### **Usage convenience**

- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### **Burners and power**

- 5 gas burners:
- Left front: economy burner up to 1 kW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 3.3 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: standard burner up to 1.75 KW (depending on gas type)

### **Safety**

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### **Installation (gas types & measurements)**

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 750 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 10.8 KW

**Series 4, Gas hob, 75 cm, Stainless steel  
PGQ7B5B90**

